


SPECIFICATION CONTROL DRAWING

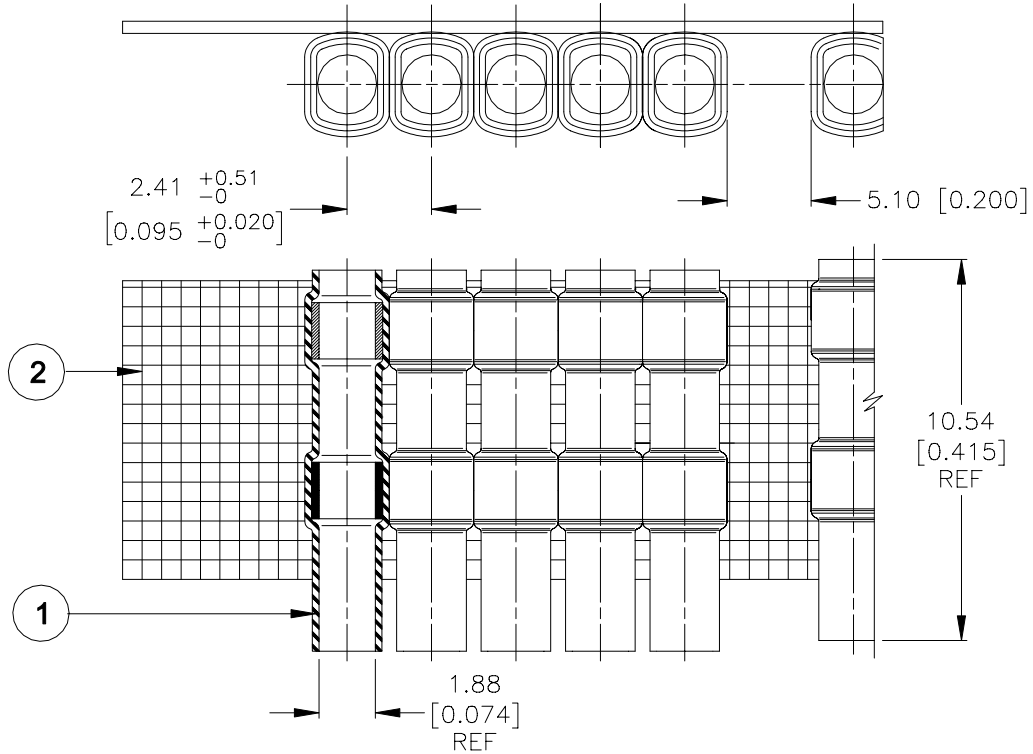

MATERIALS

1. SOLDER-SLEEVE WIRE TERMINATOR: D-128-0031, Quantity Per Assembly: 1000
2. CARRIER STRIP: Adhesive Coated High Temperature Tape

APPLICATION

1. This assembly is designed to be used on Tyco Electronics/Raychem 28 1000 01 connector assembly with contacts on 2.54 (0.100) center spacing. For usage parameters, see Tyco Electronics/Raychem Devices Specification Control Drawing D-128-0031.
2. Wire terminators are to be inspected to Raychem Devices Specification Control Drawing D-128-0031.
3. Terminators shall be placed on tape in groups of 5. The gap between groups shall be approximately 5.10 [0.200].

tyco <i>Electronics</i>		Raychem		TITLE: 2.54 [0.100] CENTER SPACING SOLDERPAK ASSEMBLY, SLEEVE: D-128-0031			
Tyco Electronics Corporation 300 Constitution Drive, Menlo Park, CA. 94025, U.S.A.				DOCUMENT NO.: D-704-0046			
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]				DOC. ISSUE: 1		DATE: 14-Jul-03	
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		PROD. REV.: C		SCALE: None	SHEET: 1 of 1
	ROUGHNESS IN MICRON			DRAWN BY: M. FORONDA	CAGE CODE: 06090	REPLACES: N/A	DCR NUMBER: D030391

If this document is printed it becomes uncontrolled. Check for the latest revision.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)