

4

3

2




1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - , - .

© COPYRIGHT - TE Connectivity ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	EC OB20-0791-98	30/JUN/98	-	DAP
	E	REVISED PER ECO-17-010218	14JUL2017	RS	MZ

- △1 MATERIAL: COPPER ALLOY.
- △2 FINISH: 30 MICROINCHES MIN. GOLD OVER 50 MICROINCHES MIN. NICKEL.
- 3 WIRE BARREL WILL ACCEPT #8 AWG WIRE.
- 4 MATES WITH AMP P/N 193990-X.
- △5 FINISH: 200 MICROINCHES MIN. SILVER OVER 40 MICROINCHES MIN. NICKEL.
- 6 ALL DIMENSIONS ARE REFERENCE ONLY.

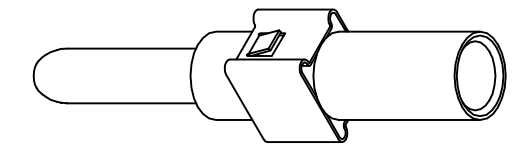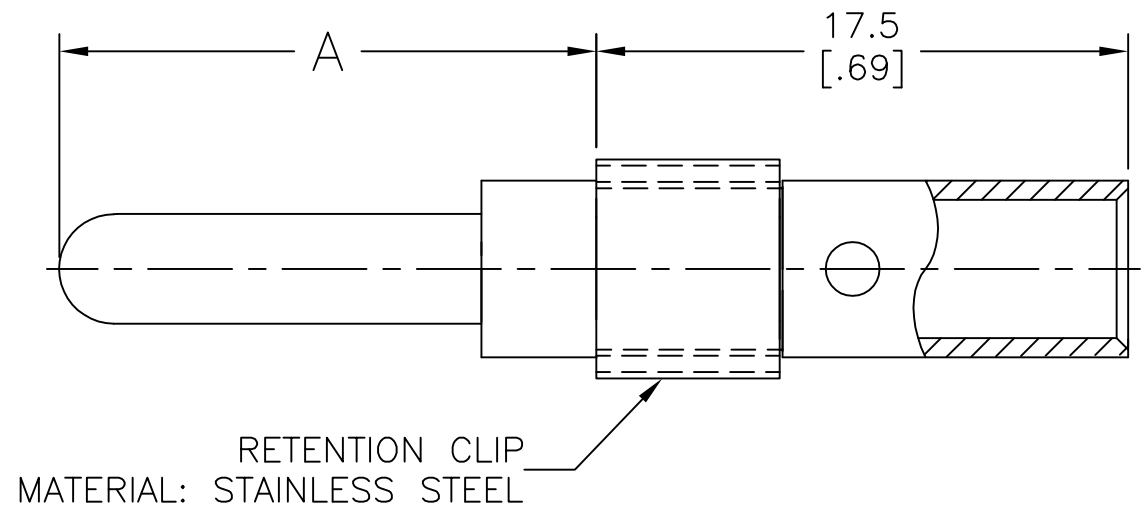

	△5	15.7[.62]	193991-4
OBSOLETE	△5	25.4[1.00]	193991-3
OBSOLETE	△2	15.7[.62]	193991-2
OBSOLETE	△2	25.4[1.00]	193991-1
	FINISH	A	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.A.P.	04-13-94	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK	-			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	-	PIN ASSEMBLY, TYPE XII HIGH CURRENT #8 AWG		
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC	-	SIZE		
MATERIAL		APPLICATION SPEC	-	CAGE CODE	DRAWING NO	RESTRICTED TO
△1		WEIGHT	-	A3	00779	©=193991
FINISH		CUSTOMER DRAWING		SCALE	SHEET	REV
△2 △5				-	1 OF 1	E

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)