


TOLERANCE = ± .010

COIL: @ 25°C	
RESISTANCE	500 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	7.0 VDC MAX. 2.0 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE 8 MS MAX
 CONTACT BOUNCE 2 MS MAX.
 OTHER REQUIREMENTS TO M39016/39-002
 (3) (M39016/39 IS 3000 Hz)

CUSTOMER DATA SHEET

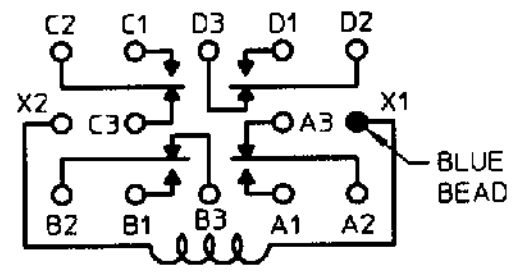

CONTACT RATING: LOW LEVEL TO 2 AMPS
 28 VDC RESISTIVE 100,000 OPERATIONS
 (4) (M39016/39 IS 3 AMPS)

DR. R.B. 2/20/98 CK 2-126/23002



CUST. COMM. EQUIV.	TYPE 'RH' RELAY
CUST. NO. M39016/39-002	

RH4C2P2609

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)