


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01 ₃	REVISED	3/20/96	[Signature] 3/20/96

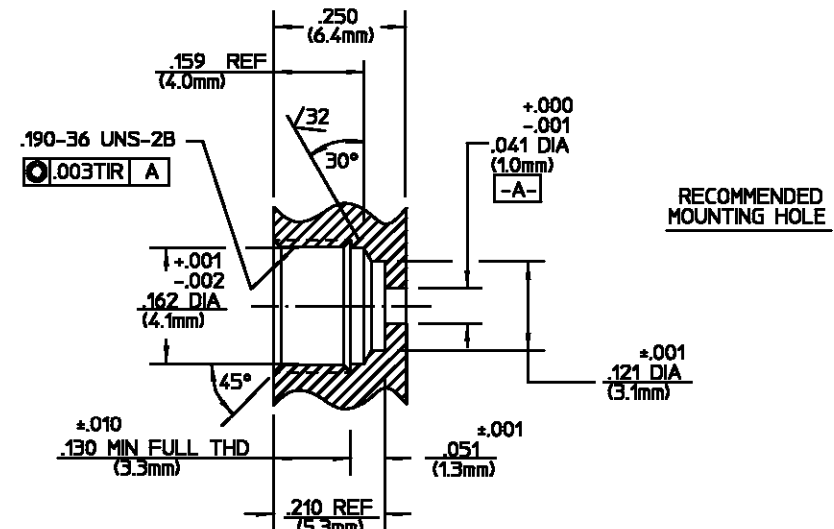

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) <u>50</u>	Interface Dimensions MIL-STD-348A, Fig. <u>319.2</u>	Temperature Rating <u>-65°C to +125°C</u>
Frequency Range (GHz) <u>DC to 26.5</u>	Recommended Mating Torque <u>N/A</u>	Vibration MIL-STD-202, Method 204, Condition D.
Volt Rating (VRMS MAX) @ Sea Level <u>250</u>	Mating Characteristics: Insertion (MAX Lbs) <u>3.0</u>	Shock MIL-STD-202, Method 213, Condition I.
VSWR <u>1.05 + .01 f(GHz)</u>	Withdrawal (MIN Oz) <u>1.0</u>	Thermal Shock MIL-STD-202, Method 107, Condition B.
Insertion Loss (dB MAX) <u>.05 √f(GHz)</u>	Force to Engage and Disengage (In-Lbs MAX) <u>2.0</u>	Moisture Resistance MIL-STD-202, Method 106
RF Leakage (dB MIN) <u>-[100-f(GHz)]</u>	Center Contact Captivation Axial (Lbs) <u>6.0 MIN</u>	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray
Corona, 70,000 Ft (VRMS MIN) <u>190</u>	Radial (In-Oz) <u>N/A</u>	Leak Test MIL-STD-202, Method 112, Condition C, 1 x 10 ⁻⁸ cc/sec
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level <u>750</u>		
Contact Resistance (Milliohms MAX) Center Contact <u>12.0</u>		
Outer Contact <u>2.0</u>		
Cable to Housing <u>N/A</u>		
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) <u>500</u>		
LR.(Megohms MIN) <u>5,000</u>		

COMPONENT	MATERIAL	FINISH
HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	GOLD PLATE PER MIL-G-45204
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
GASKET	SOFT COPPER PER ASTM-B-152 OR ASTM-B-370, ALLOY 110	GOLD PLATE PER MIL-G-45204
CONTACT EXT. BUSHING	IRON-NICKEL-COBALT ALLOY PER MIL-I-23011 CLASS 1 (KOVAR)	GOLD PLATE PER MIL-G-45204
HERMETIC SEAL	GLASS BEAD	N/A

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC. DEC. ANGLES ± 1/64 ±.005 ± °	DRAWN BY <u>FPZ</u> DATE <u>8-1-78</u>			AMP Incorporated	
	CHECKED BY <u>KRW</u> 8-2-78			140 Fourth Avenue Waltham, MA 02451-7599	
These drawings and specifications are the property of M/A-COM Interconnect Division and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	APPD BY <u>RMF</u> 8-2-78	TITLE <u>OSSM BULKHEAD JACK RECEPTACLE HERMETICALLY SEALED</u>			
	USE ASS'Y PROCEDURE	NO. AP. <u>408-04773 (10-701)</u>	SIZE <u>B</u>	CODE IDENT NO. <u>26805</u>	REV <u>01₃</u>
			SCALE <u>10 : 1</u>	SHEET 1 OF 1	

CUSTOMER DRAWING AMP PART # 1045651-1 SHEET 1 OF 1 REV A

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)