


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
G	14	P	LTR	DESCRIPTION	DATE	DWN	APVD
		G		REV & REDRAWN PER ECR 10-005247	09MAR10	JR	TM

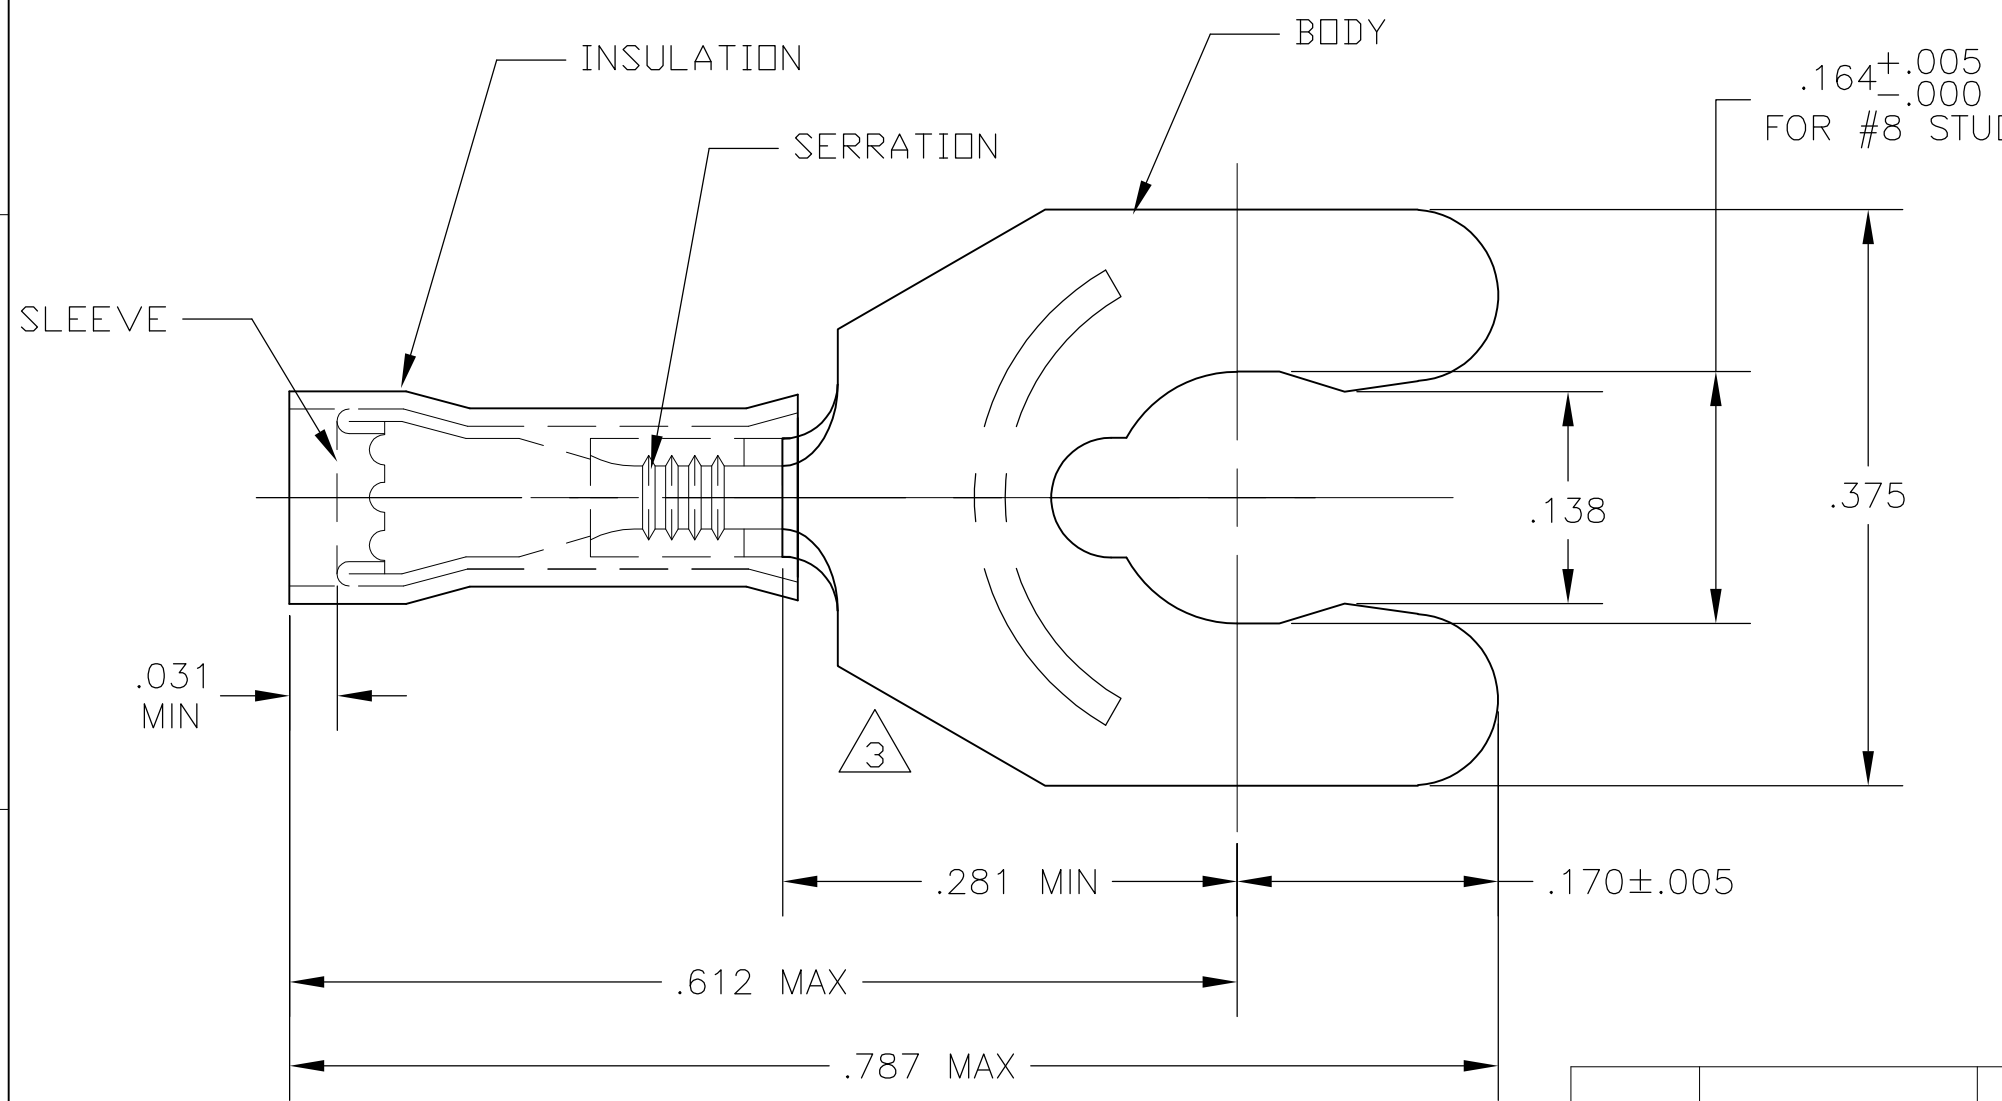

- 1 FOR .050 TO .082 WIRE INSULATION DIA
- 2 TONGUE MATERIAL THK = .018 ± .002
- 3 APPLIES FROM THE METAL EDGE OF THE BARREL TO THE CENTER OF THE STUD

5,000	52925 ON TAPE	BODY: PHOS BRONZE PER ASTM-B103 TIN PLATE PER ASTM-B545	52925-1
1	WIRE TERMINAL	SLEEVE: COPPER PER ASTM-B152 TIN PLATE PER ASTM-B545	
		INSULATION: NYLON PER ASTM-D4066 TYPE 1, COLOR: YELLOW	52925
QTY	DESCRIPTION	MATERIAL & FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN jr_ruth 09MAR10	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK TOM MICHIELUTTI 09MAR10	NAME WIRE TERMINAL, PIDG, SPRING SPADE WIRE SIZE: 26-22	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD TOM MICHIELUTTI 09MAR10	SIZE A3 00779	
0 PLC ± -		PRODUCT SPEC	DRAWING NO G-52925	
1 PLC ± -		APPLICATION SPEC	RESTRICTED TO	
2 PLC ± .008		WEIGHT	SCALE 8:1	
3 PLC ± -		FINISH	SHEET 1 OF 1	
4 PLC ± -		SEE TABLE	REV G	
ANGLES ± 5'		SEE TABLE	CUSTOMER DRAWING	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)