



REV. 2
DCO 142664


COIL: @ 25°C	
RESISTANCE	720 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.1 VDC MAX., 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION	10	CPS TO	3000	CPS @	30	g's
SHOCK	75	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE 4 MS MAX.
RELEASE 6 MS MAX.
CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

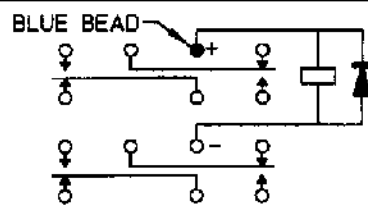

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS

DR. PBB 5-3-00 CK. *[Signature]*



CUST. QPL
CUST. NO. M39016/53-012M REV. _____

3SBH RELAY

3SBH1231A2

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)