


Molded Parts Specification Control Drawing

Part Number : 214A052-X-12
Description : Boot, Rectangular, Subminiature, Straight

- NOTES**
- All dimensions are in $\frac{\text{inches}}{\text{[millimeters]}}$
 - Dimensions appearing in table are as follows:
 - a - As Supplied
 - b - After Unrestricted Recovery
 - Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by .06 max.

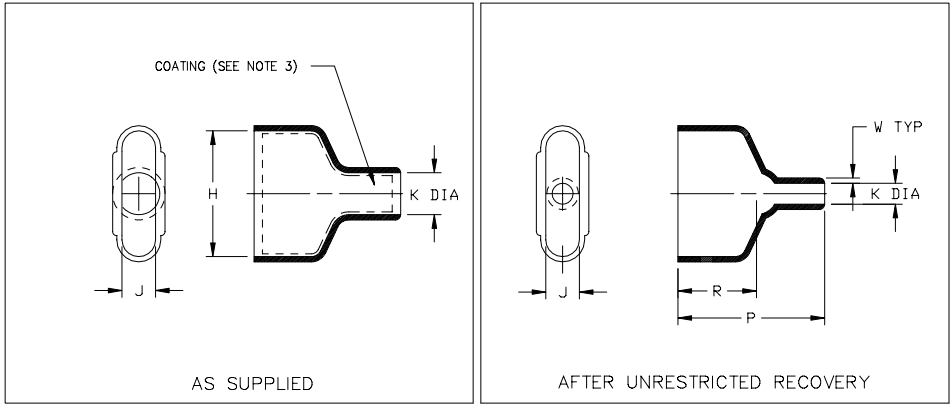

PART NUMBER	H		J		K		P	R	W	This Boot Fits	
	Min a	±5% b	Min a	±5% b	Min a	Max b				±10% b	±10% b
214A052-X-12	2.73 [69,3]	2.28 [57,9]	.74 [18,8]	.54 [13,7]	.74 [18,8]	.42 [10,7]	2.40 [61,0]	1.25 [31,8]	.04 [1,0]	DD-50	XX50X

tyco **Raychem**
Electronics
TYCO ELECTRONICS
300 CONSTITUTION DRIVE
MENLO PARK, CALIFORNIA 94025


Revision : A
Date : 8/27/03

Part Number : 214A052-X-12
Description : Boot, Rectangular, Subminiature, Straight

Molded Parts Specification Control Drawing

Part Number : 214A052-X-12
Description : Boot, Rectangular, Subminiature, Straight

MATERIAL DASH NO.	MATERIAL DESCRIPTION	RT SPEC	COATING SLASH NO.	COATING S NO.	COATING DESCRIPTION
-25	Elastomer, Fluid Resistant	RT-1325	/86	S-1048	Adhesive

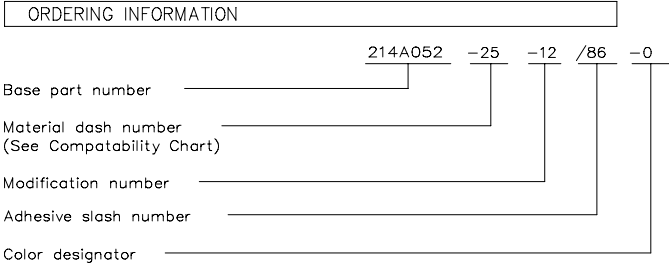

THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE; CONSULT YOUR NEAREST FIELD REPRESENTATIVE FOR CURRENT REVISION

**If this document is printed it becomes uncontrolled.
Check for the latest revision.**

tyco **Raychem**
Electronics
TYCO ELECTRONICS
300 CONSTITUTION DRIVE
MENLO PARK, CALIFORNIA 94025

Revision : A
Date : 8/27/03

Part Number : 214A052-X-12
Description : Boot, Rectangular, Subminiature, Straight

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)