
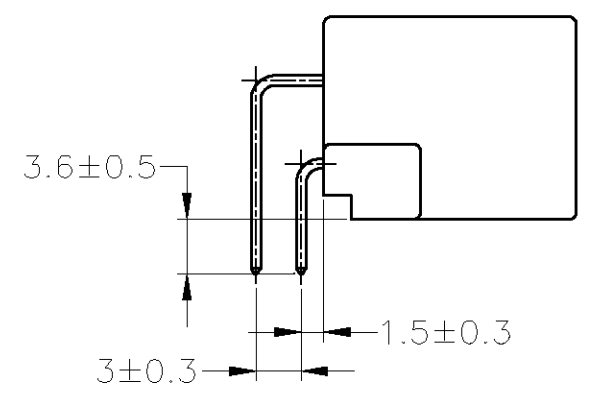
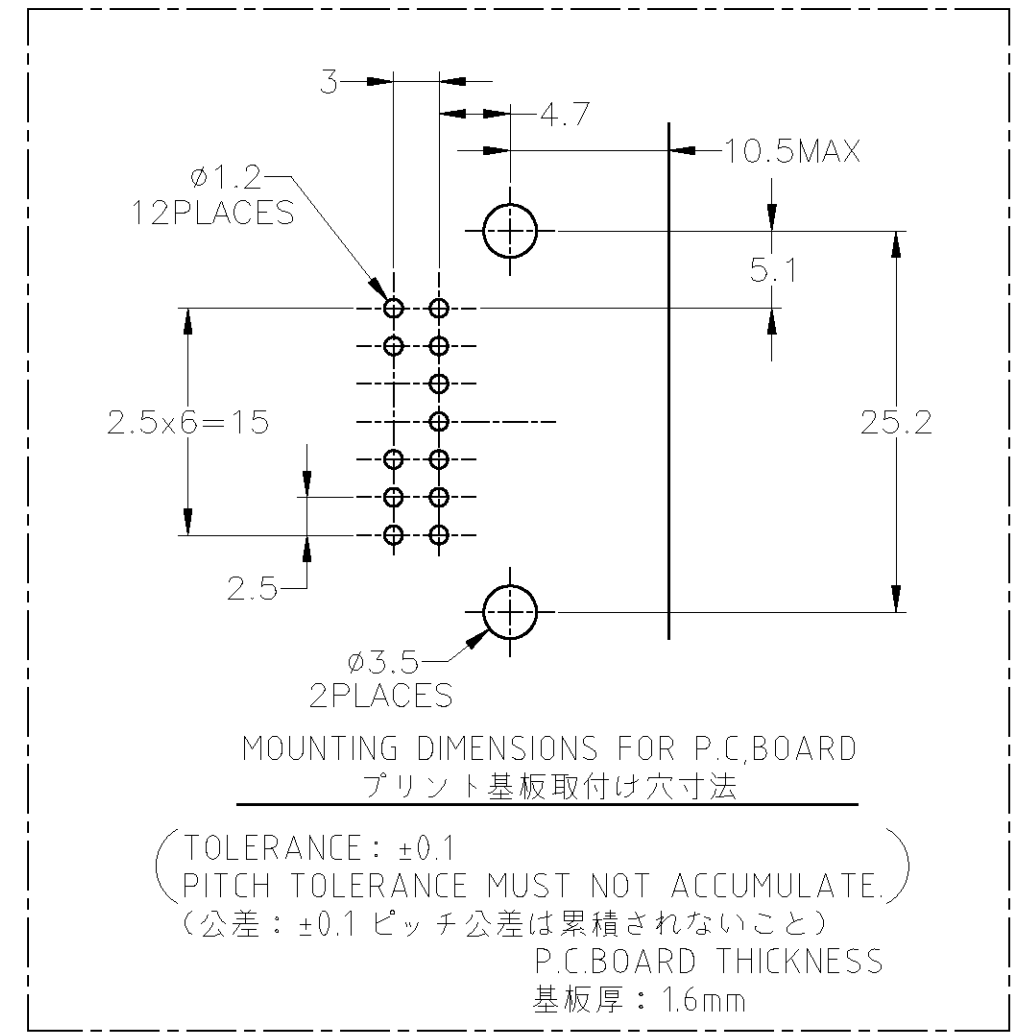
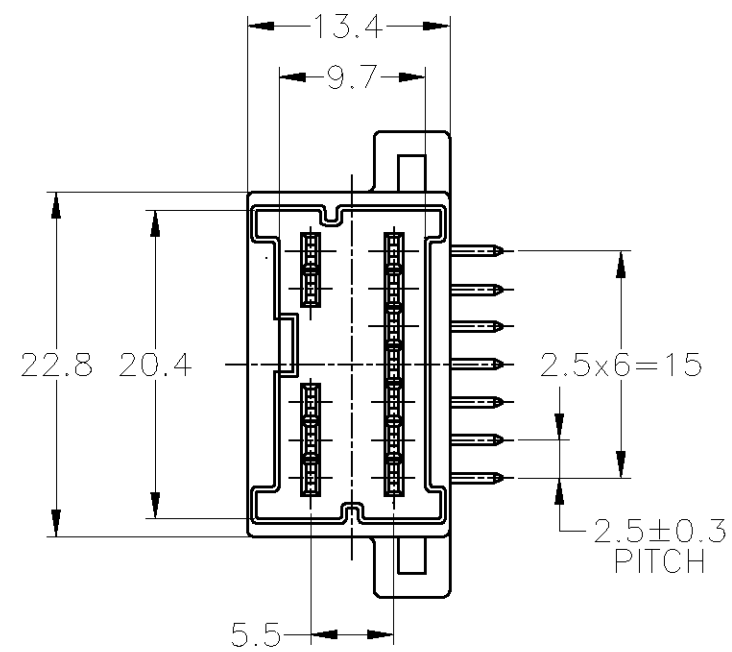



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By Tyco Electronics Japan G.K. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	-	D	REVISED	ECR-11-008701	26APR11	TS	KB

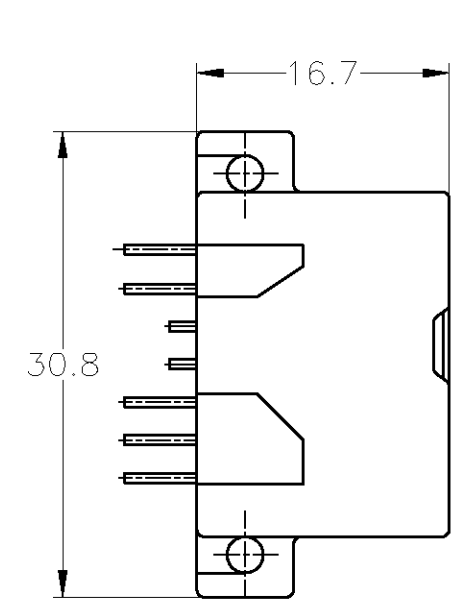

1. RECOMMENDED MOUNTING SCREW:
 PAN-HEADED, TYPE 2 TAPPING SCREW OF
 3DIA × 6LENGTH (JIS B1115, B1122),
 TIGHTENING TORQUE: 0.39N·m MAX.
 2. CIRCUIT NUMBER

1. 推奨取付ネジ: JIS B1115, B1112
 タッピングネジ, なべ2種, 呼び径3, 長さ6,
 締め付けトルク: 0.39N·m 以下
 2. 回路番号

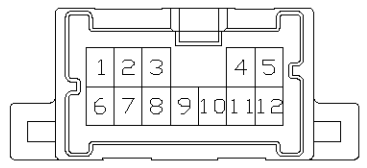

一般公差 (GENERAL TOLERANCE)

10 ≥	: ±0.2
30 ≥ > 10	: ±0.25
100 ≥ > 30	: ±0.3
ANGLE	: ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	0 PLC ± -
	1 PLC ± -
	2 PLC ± -
	3 PLC ± -
	4 PLC ± -
	ANGLES ± -
MATERIAL	FINISH
PBT	-

OBSOLETE	錫めっき (10) / 金めっき (2) PRE-TINED (10) / GOLD (2)	7, 9	△2	自然色 NATURAL	3-1123413-1
OBSOLETE	錫めっき (10) / 金めっき (2) PRE-TINED (10) / GOLD (2)	7, 9	△2	自然色 NATURAL	2-1123413-1
	錫めっき (12) PRE-TINED (12)	-		自然色 NATURAL	1123413-1
	タブ仕上 (本数) FINISH OF CONTACT			金めっき端子使用回路番号 CIRCUIT NO. OF GOLD PLATED CONTACT	色 COLOR
					型番 PART NUMBER

DWN T.MINEMATSU 08APR98		STE TE Connectivity	
CHK E.SASAKI 08APR98			
APVD M.TSUKAKOSHI 08APR98		NAME	
PRODUCT SPEC		040III MULTILOCK CONNECTOR 12POSITION CAP HOUSING ASSEMBLY WIRE TO BOARD (H) TYPE	
APPLICATION SPEC		SIZE	RESTRICTED TO
WEIGHT 3.9 g		CAGE CODE A300779	DRAWING NO C-1123413
CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)