


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
FT	0	B1	REVISED PER ECO-13-008672		31AUG13	KH	DR

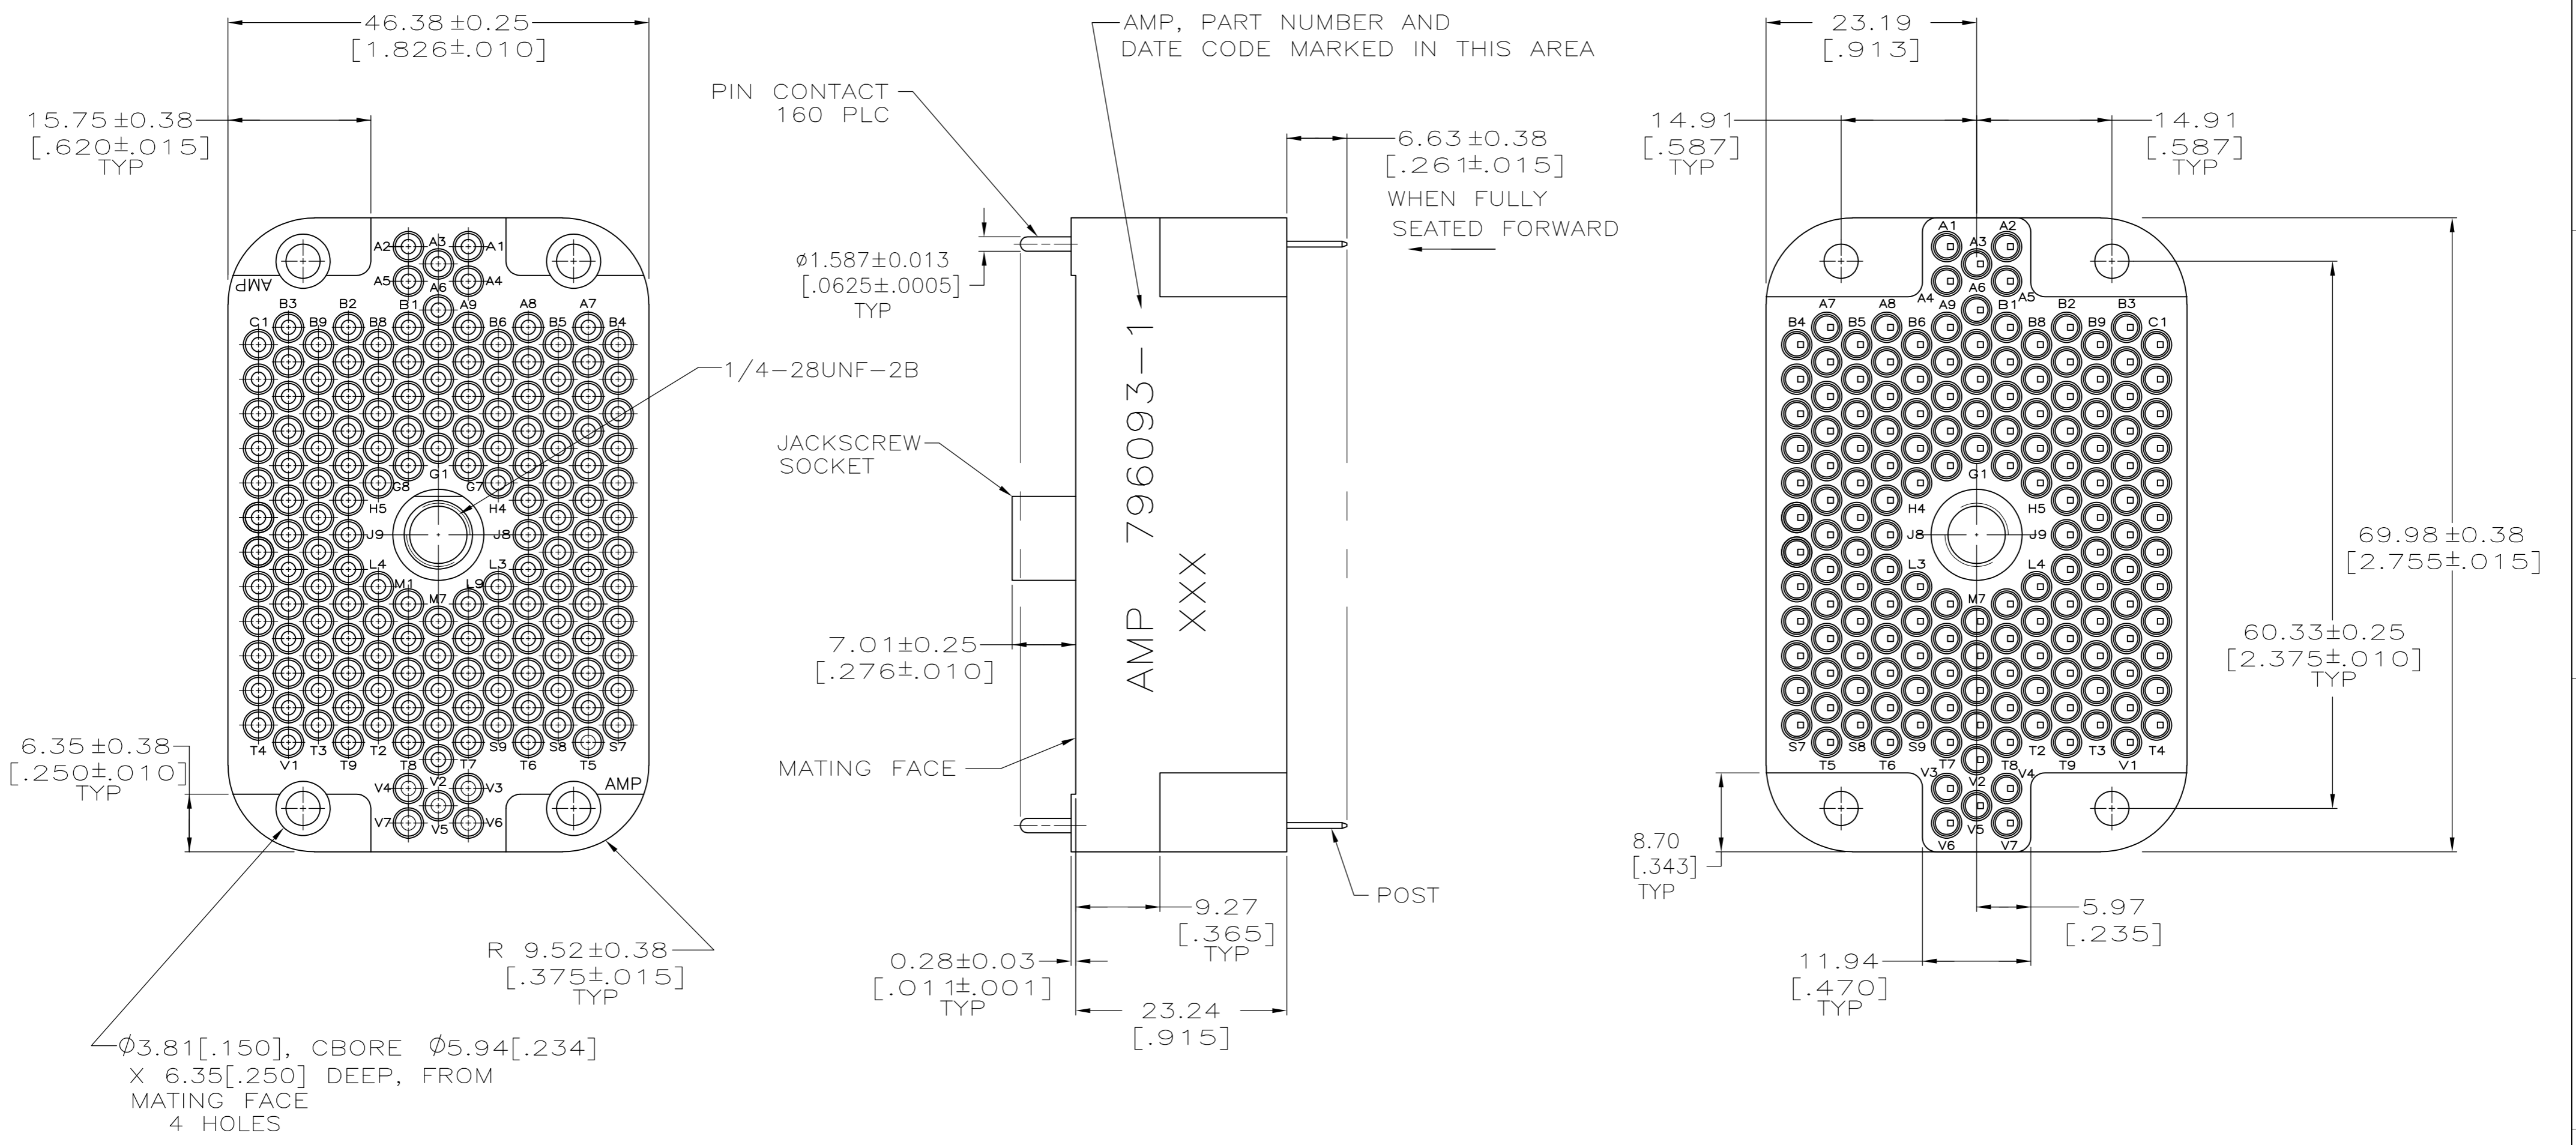

- 1 THIS ASSEMBLY MATES WITH 789092.
- 2 JACKSCREW SOCKET: STAINLESS STEEL. PIN CONTACT: BRASS. RECEPTACLE BLOCK: DIALLYL PHTHALATE, BLUE.
- 3 PIN CONTACT: $0.76\mu\text{m}$ [$.000030$] MIN GOLD ON $\phi 1.588$ [$.0625$], 6.35 [$.250$] FROM MATING END AND REMAINDER GOLD FLASH ALL OVER $1.27\mu\text{m}$ [$.000050$] MIN NICKEL. POST: $2.54\mu\text{m}$ [$.000100$] MIN TIN-LEAD PER MIL-T-10727 OVER $2.54\mu\text{m}$ [$.000050$] MIN NICKEL PER QQ-N-290.
- 4 PIN CONTACT: $0.76\mu\text{m}$ [$.000030$] MIN GOLD ON $\phi 1.588$ [$.0625$], 6.35 [$.250$] FROM MATING END AND REMAINDER GOLD FLASH ALL OVER $1.27\mu\text{m}$ [$.000050$] MIN NICKEL PER QQ-N-290.

OBSELETE	4	-796093-2-
	3	796093-1
FINISH		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	20 APR 98		TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK	21 APR 98		RECEPTACLE ASSEMBLY, 160 POSITION, POSTED, M SERIES		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	21 APR 98		SIZE CAGE CODE DRAWING NO RESTRICTED TO		
0 PLC ± -		PRODUCT SPEC			A2 00779 C=796093		
1 PLC ± -		APPLICATION SPEC		SCALE 2:1 SHEET 1 OF 1 REV B1			
2 PLC ± 0.13 [.005]		WEIGHT					
3 PLC ± -		CUSTOMER DRAWING					
4 PLC ± -							
ANGLES ± -							
FINISH							

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)