


COIL: @ 25°C  
 RESISTANCE 700 OHMS ± 10%  
 NOMINAL VOLTAGE 26.5 VDC  
 MUST OPERATE 14.0 VDC  
 MUST RELEASE 1.8 VDC

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's  
 SHOCK 100 g's 6 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: DIELECTRIC 1000 VRMS EXCEPT  
500 VRMS ACROSS OPEN CONTACTS.

CUSTOMER DATA SHEET

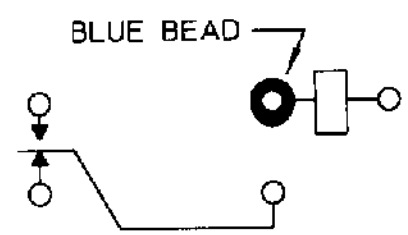

CONTACT RATING: 10 AMP/28 VDC  
RESISTIVE 50,000 OPERATIONS

DR. R.B. 6/4/98 CK. *[Signature]*



CUST. C. I. I. STD.  
 CUST. NO. \_\_\_\_\_

TYPE 'CBW' RELAY

CBW-1C-24B

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)