



断面 X-X
SECTION X-X

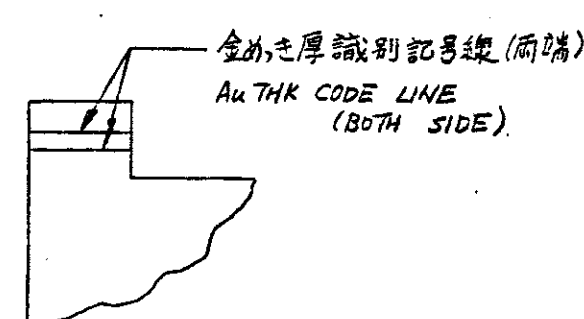

矢視 Z
VIEW Z

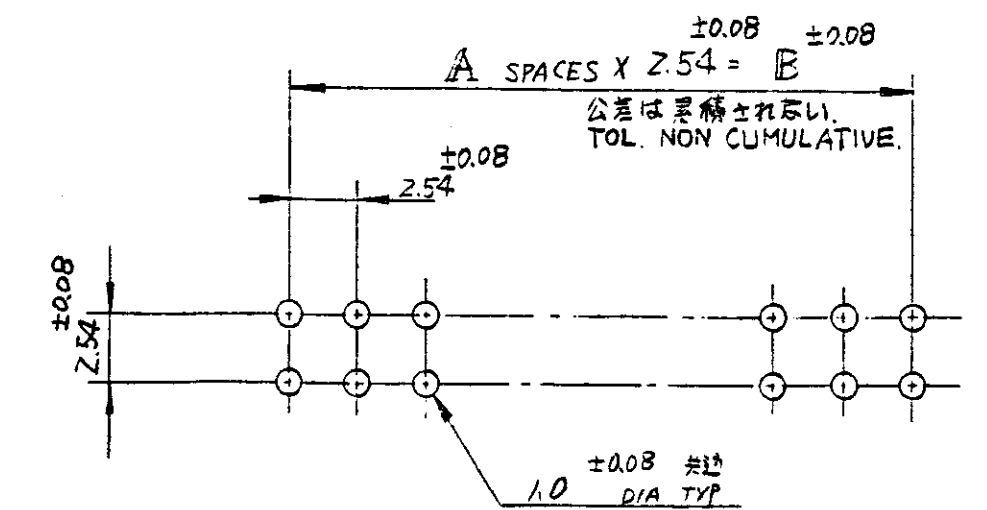

プリント基板推奨穴位置
RECOMMENDED HOLE LAYOUT

- NOTES:
- △ FINISH: T THK GOLD PLATED IN AREA "A" AND 0.0010 MIN TIN LEAD PLATED IN AREA "B" ON 0.0013 MIN ALL OVER THE NICKEL.
 2. PRODUCT SPEC: 108-25017
 3. MATE WITH: □-173281-□, 102584-□, 102585-□, 102667-□
 - △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

- 注記:
- △ ホストの仕様; 接触部(エリアA)金めきT厚, Ni下地めき0.0013 MIN. 半田付91% 半田めき0.001 MIN.
 2. 製品規格番号: 108-25017
 3. 嵌合端子番号: □-173281-□, 102584-□, 102585-□, 102667-□.

Z本 Z LINE 0.00076MIN	162.1	160.0	149.86	59	120	2-173282-6
	136.7	134.6	124.46	49	100	2- -5
	111.3	109.2	99.06	39	80	2- -4
	98.6	96.5	86.36	34	70	2- -3
	73.2	71.1	60.96	24	50	2- -2
Z本 Z LINE 0.00076MIN	40.1	38.1	27.94	11	24	2-173282-1
1本 1 LINE 0.0001 AVE	162.1	160.0	149.86	59	120	1-173282-6
△ OBSOLETE	136.7	134.6	124.46	49	100	1- -5
	111.3	109.2	99.06	39	80	1- -4
	98.6	96.5	86.36	34	70	1- -3
	73.2	71.1	60.96	24	50	1- -2
1本 1 LINE 0.0001 AVE	40.1	38.1	27.94	11	24	1-173282-1
△ OBSOLETE	73.2	71.1	60.96	24	50	173282-6
△ OBSOLETE	162.1	160.0	149.86	59	120	1- -5
	136.7	134.6	124.46	49	100	1- -4
	111.3	109.2	99.06	39	80	1- -3
	98.6	96.5	86.36	34	70	1- -2
△ 4	40.1	38.1	27.94	11	24	173282-1

AMP Tyco Electronics AMP K.K. Kawasaki, Japan

DESCRIPTION: HEADER ASSEM, SHROUDED MOD II 254x 2.54 GRID. STD POSTS (WITH POLARIZING LUGS)

SIZE: G LOC: J DWG NO: C-173282

SCALE: 1 OF 1

REV: C1

PROJ. 951-120

ALL DIMENSIONS IN MM. DO NOT SCALE PRINT.

C1	REVISED PER ECO-09-022424	KK	AEG	01/00
C	REVISED FDD-0183-99	H.T	KA	10/99
B	ADDED ITEMS	REN	1/00	1/00
B	ADDED 50 PINS	REN	1/00	1/00
A	REVISED	REN	1/00	1/00
O	RELEASED	REN	1/00	1/00
LTR	REVISION RECORD	DR	CHK	DATE

AMP J 030-8 REV 1 61

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)