
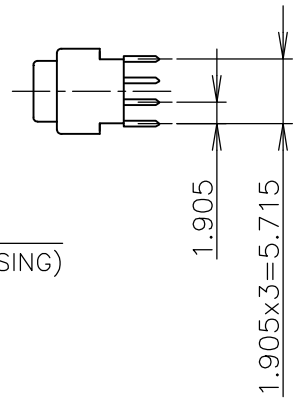
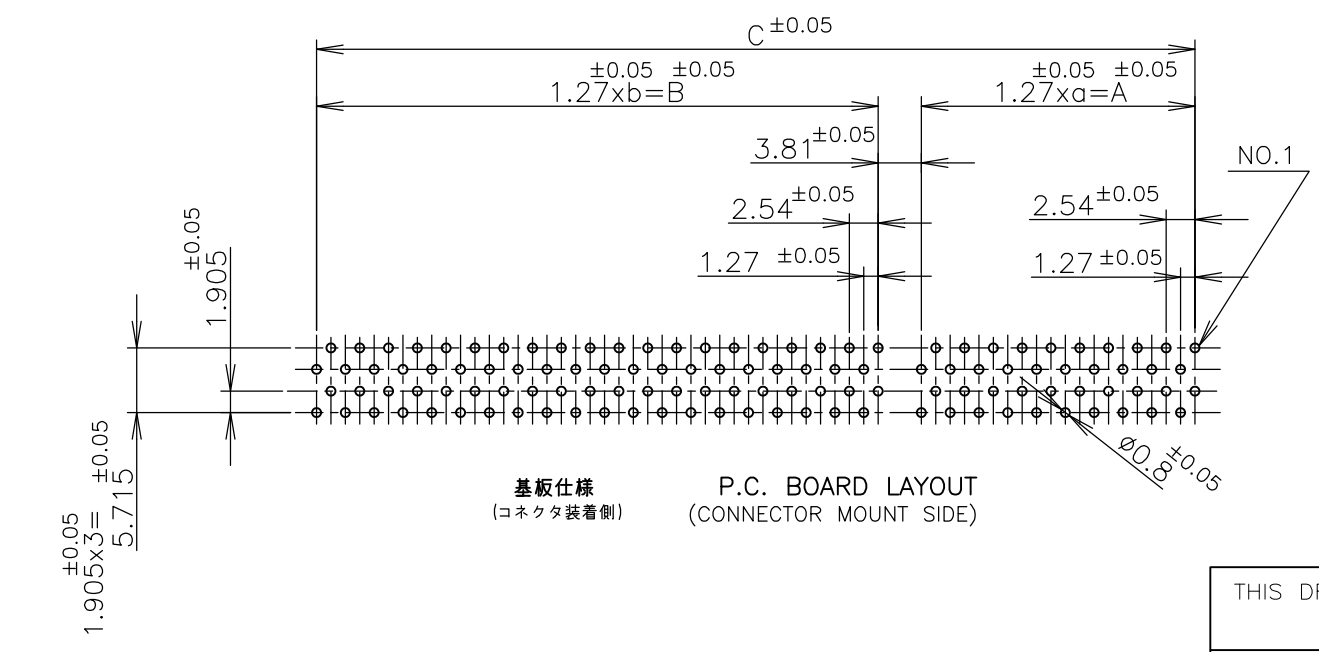
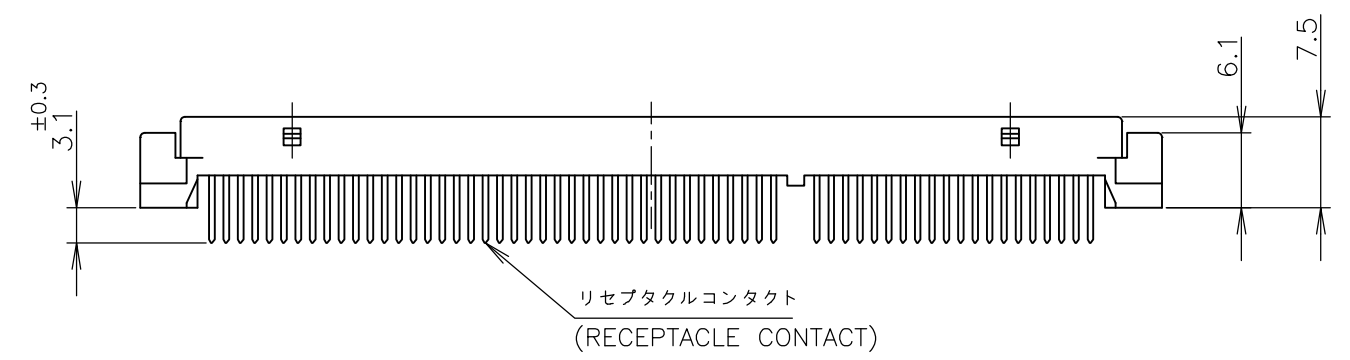


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION JUL, 1994.
 © COPYRIGHT 1994 BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J	/	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		REACTIVATE ECR-09-024354	06NOV09	T.T	T.M

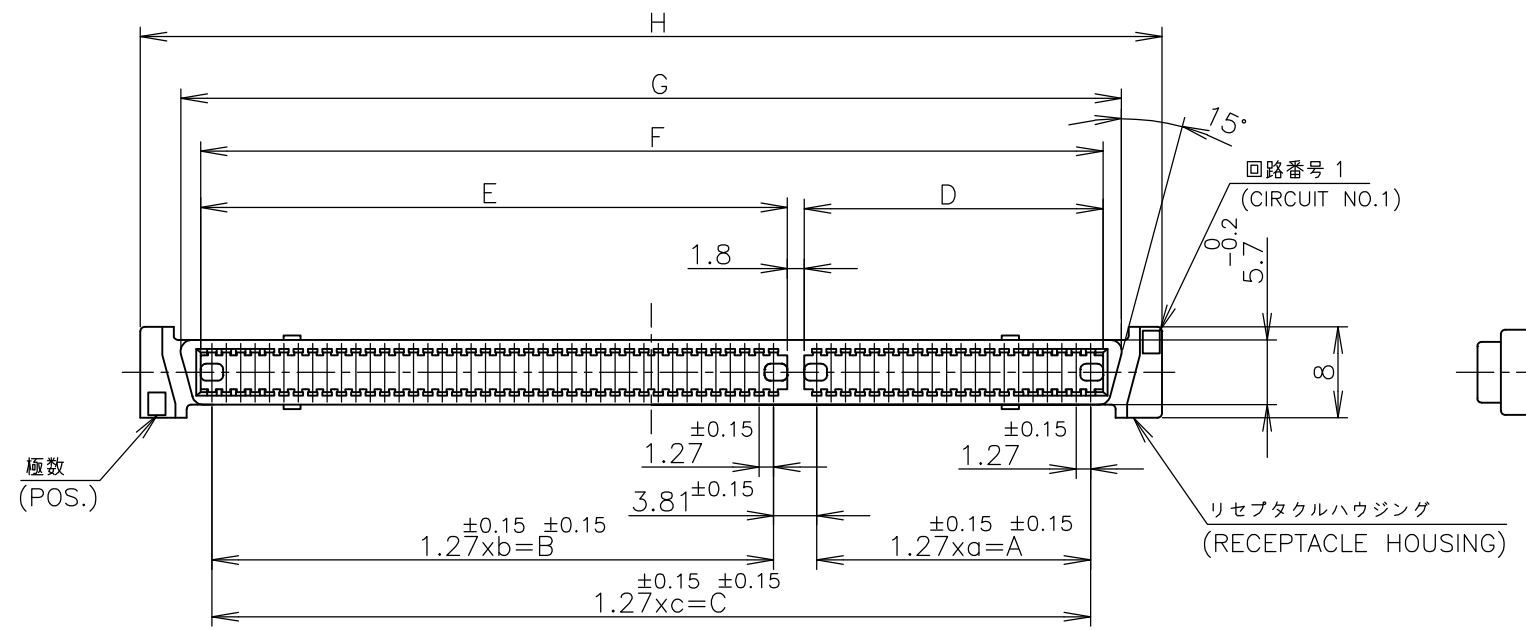

- ① 材料: *ハウジング; ガラス入り ナイロン 6T (UL 94V-0) 色、黒。
*コンタクト: 磷青銅。
- ② 表面仕上げ;
ニッケル下地めっきに接触部金めっき、半田付部半田めっきを施す。金めっき厚は下表参照。
- ① MATERIAL: HOUSING: GLASS FILLED NYLON 6T (UL 94V-0) BLACK.
CONTACT: PHOSPHOR-BRONZE,
- ② FINISH: GOLD PLATING ON CONTACT AREA AND TIN-LEAD PLATING ON TINE AREA OVER NICKEL PLATING. GOLD PLATING THICKNESS SHOWN TABLE.

- -; AS SHOWN

49	62.23	64.03	67.47	74.85	0.76 μm	100	2-179530-4						
a	A	b	B	c	C	D	E	F	G	H	THK OF GOLD	POS.	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN H.KODAMA 26JUL1994	Tyco Electronics Corporation Kawasaki, Japan
CHK Y.FUJIURA 27JUL1994	
APVD Y.FUJIURA 27JUL1994	
NAME Y.FUJIURA	
PRODUCT SPEC 製品規格	1.27 FH CONN, VERT, REC, 10mm STACK HIGH TEMP TYPE
APPLICATION SPEC 取付適用規格	
WEIGHT	SIZE A3 CAGE CODE 00779 DRAWING NO G-179530 RESTRICTED TO
CUSTOMER DRAWING	SCALE 1 OF 1 SHEET 1 OF 1 REV B

GENERAL TOLERANCE 一般公差

10 ≥	±0.2
30 ≥ > 10	±0.25
100 ≥ > 30	±0.3
ANGLES	±3°

DIMENSIONS: 単位: 耗 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差

0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± -

MATERIAL 材料

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)