
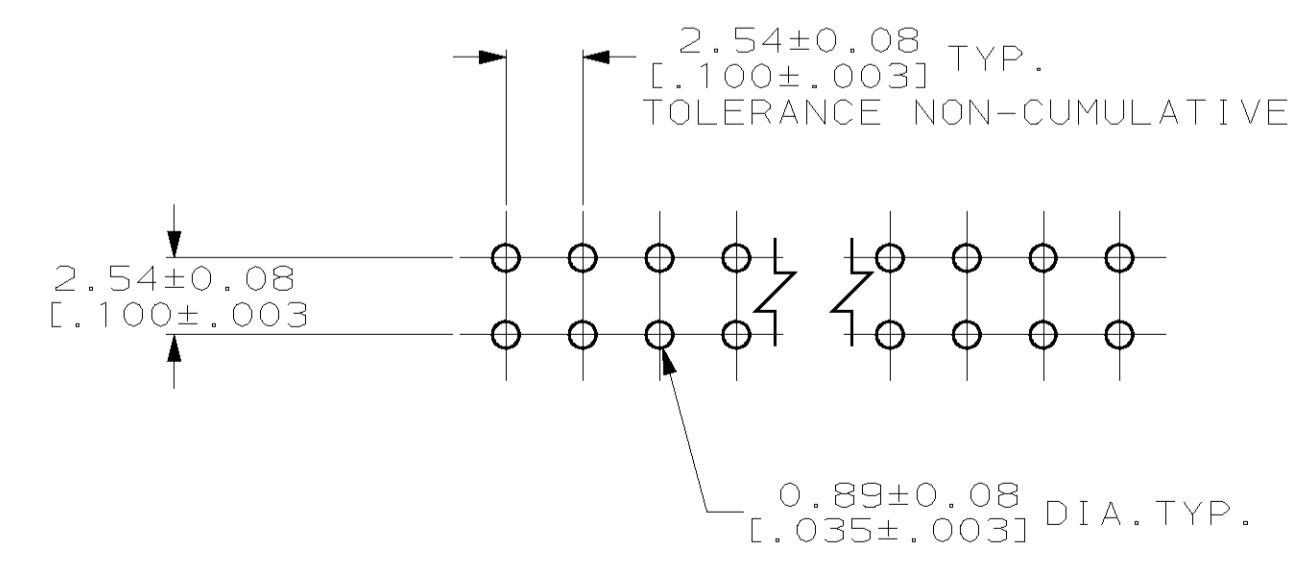


REVISONS		DATE	DWN	APVD
0	DP 4633-96-22	3/8/96	TH	GD
A	REV PER 0430-0257-97	19AUG99	BH	JG
B	REV PER 0621-0071-98	25AUG99	BH	JG

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
  - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- ③ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- ④ HOUSING: PPA, COLOR-BLACK.
- ⑤ 0.00254-0.00508 [.000100-.000200] BRIGHT TIN-LEAD, OVER 0.00127 [.000050] NICKEL.

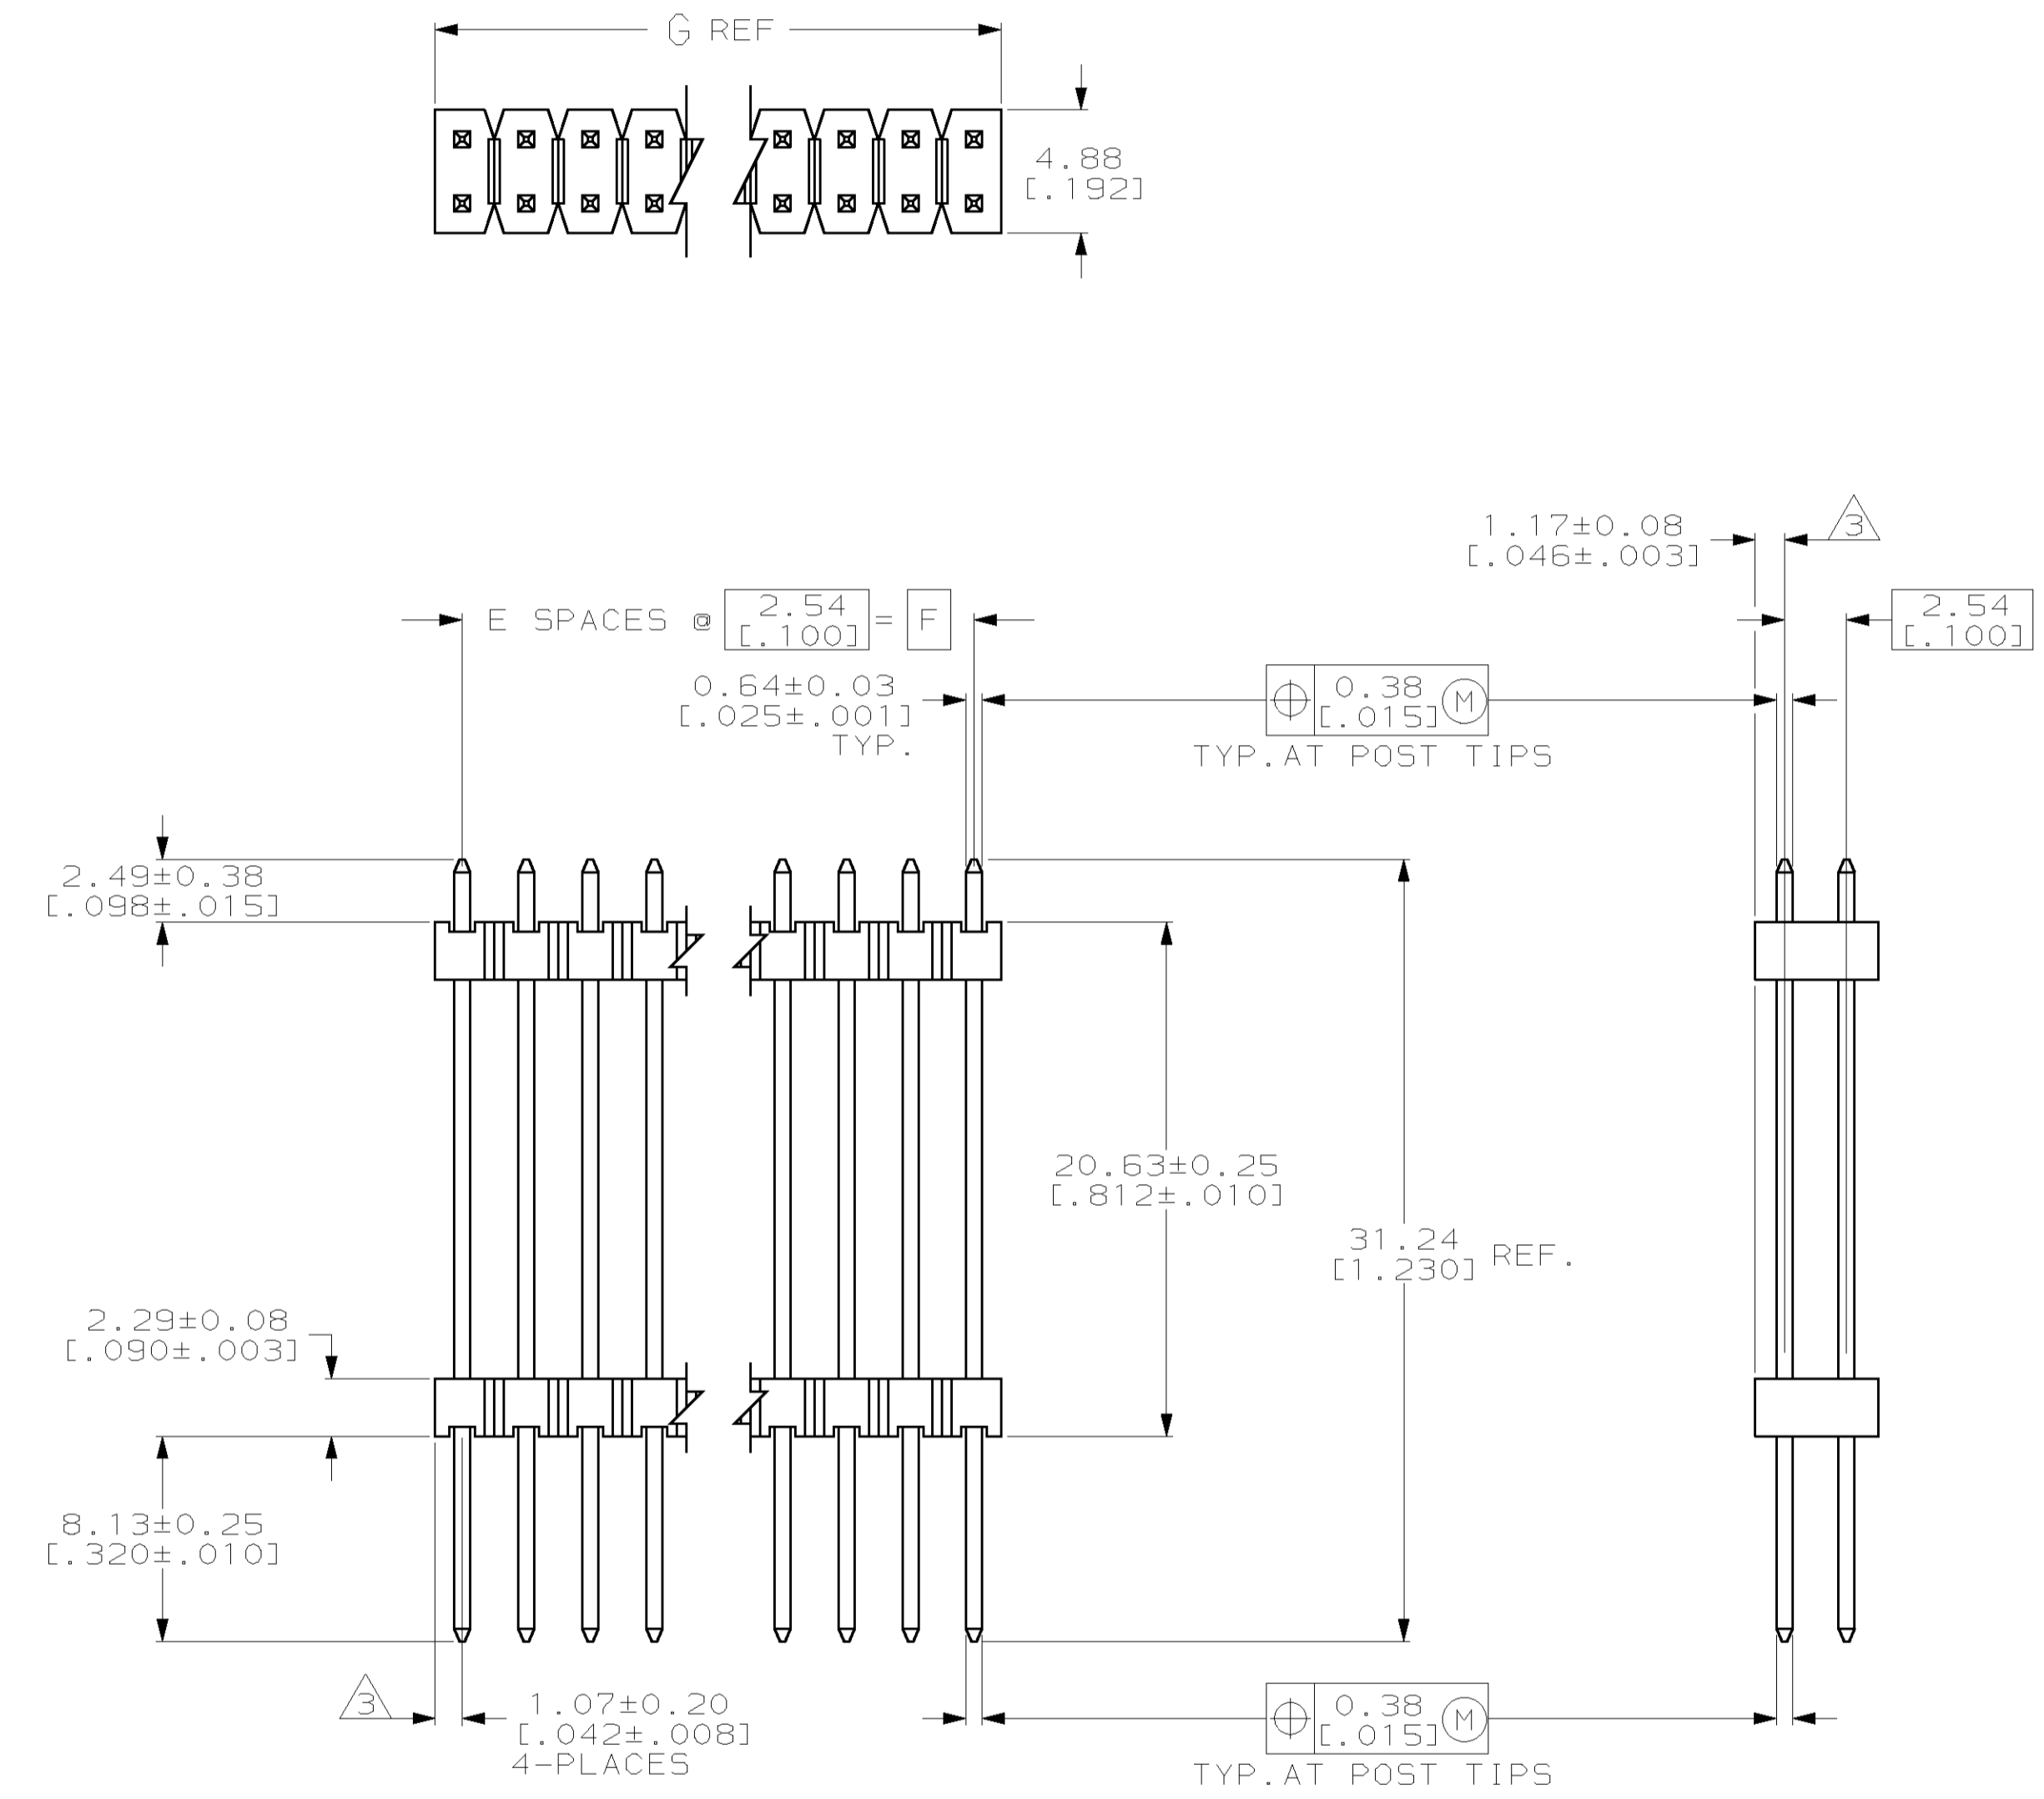

32.61 [.1284]	30.48 [.1200]	12	25	146515-2
12.29 [.484]	10.16 [.400]	4	10	146515-1
G	F	E	NO. OF POSITIONS	PART NUMBER

<small>THIS DRAWING IS A CONTROLLED DOCUMENT AND IS UNPUBLISHED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.</small>		DWN: I. HOFFMAN 3/8/96 CHK: G. DUBNICZKI 3/25/96 APVD: G. DUBNICZKI 3/25/96	AMP Incorporated Harrisburg, PA 17105-3608
DIMENSIONS: mm 	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±0.51 [.02] 2 PLC ±0.127 [.005] 3 PLC ±0.127 [.005] 4 PLC ±0.0127 [.0005] ANGLES ±.	PRODUCT SPEC: - APPLICATION SPEC: - FINISH: -	NAME: HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SQ. POST, UNSHROUDED HIGH TEMPERATURE SIZE: A1 CAGE CODE: 00779 DRAWING NO: C-146515
MATERIAL: ④	FINISH: ⑤	WEIGHT: -	CUSTOMER DRAWING SCALE: 4:1 SHEET: 1 OF 1 REV: B

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)