
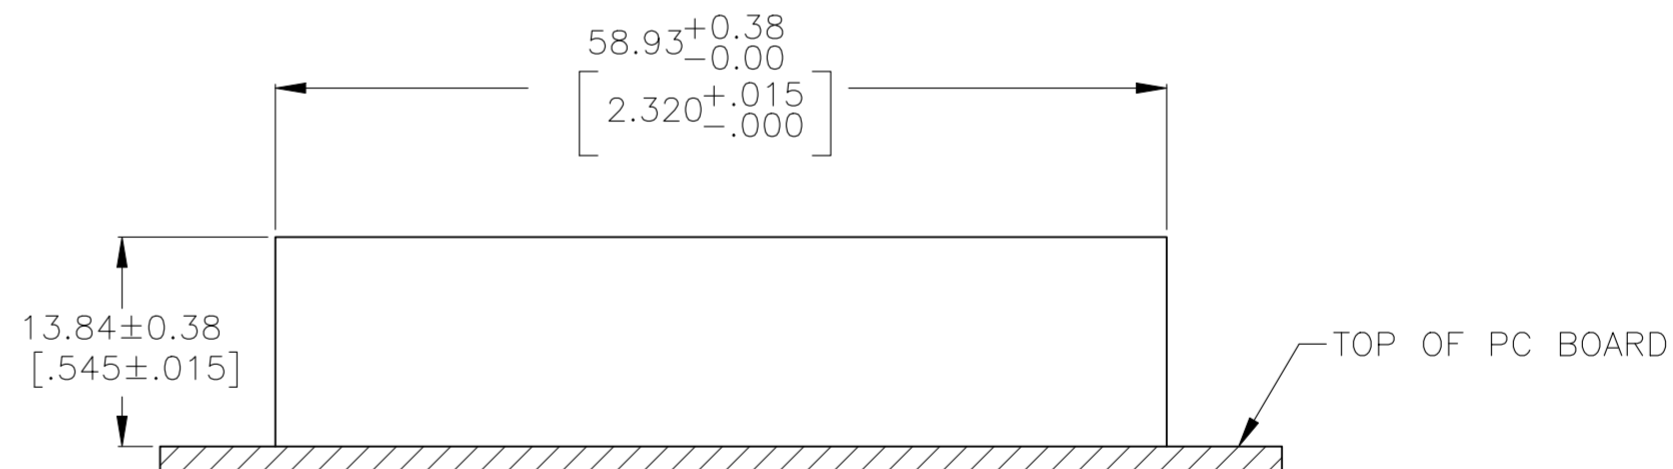
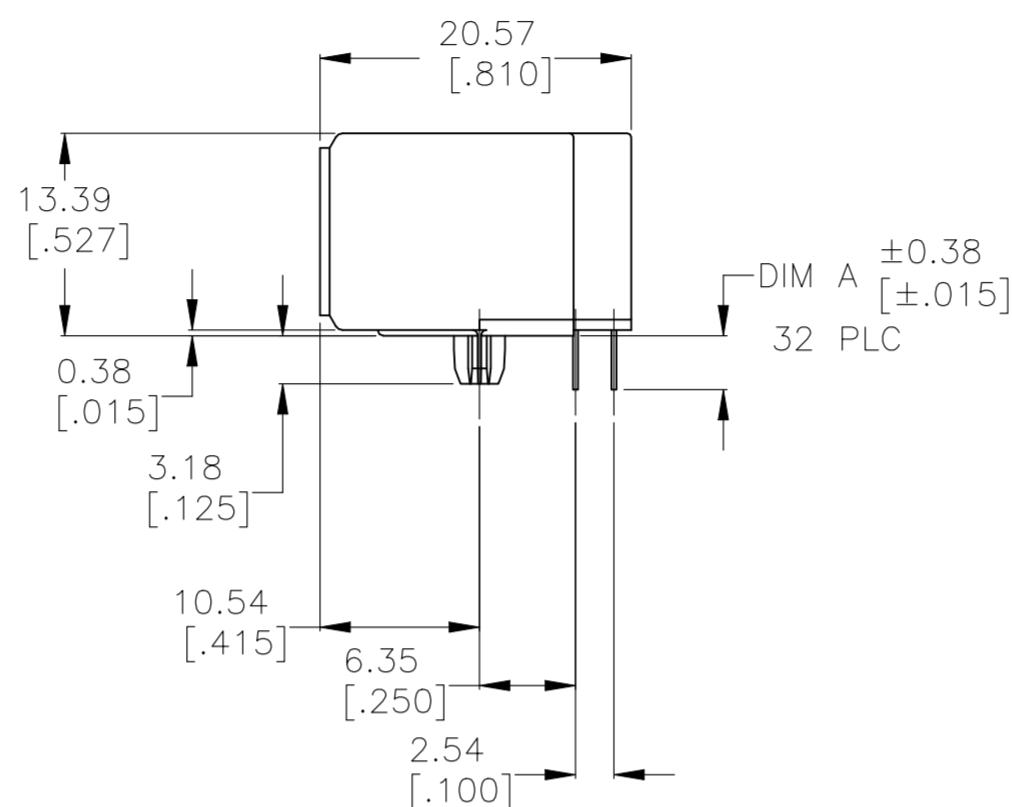


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
A1		ECR-19-014657	13DEC2020	RR	SZ


1. MATERIAL: HOUSING – HIGH TEMPERATURE NYLON, COLOR: BLACK, UL 94V-0
 OVERMOLDED TERMINAL ARRAY – PBT, BROWN
 TERMINALS – 0.33[.013] THICK PHOS BRONZE PLATED WITH 1.27 μ m[.000050] MINIMUM THICK HARD GOLD IN LOCALIZED AREA AND 3.81 μ m [.000150] MINIMUM THICK MATTE TIN IN SOLDER AREA OVER 1.27 μ m[.000050] MINIMUM THICK NICKEL UNDERPLATE.

2 JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.

3 USE #30 DRILL BIT OR 3.25mm DRILL BIT WHEN PRODUCING THESE PCB HOLES.

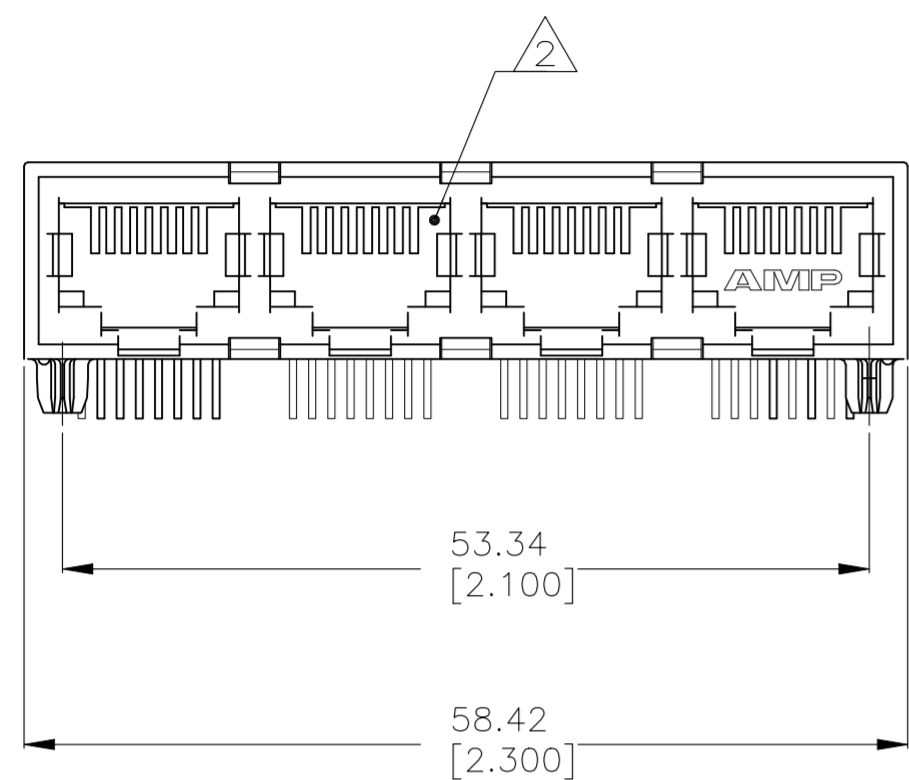

SUGGESTED PANEL CUTOUT

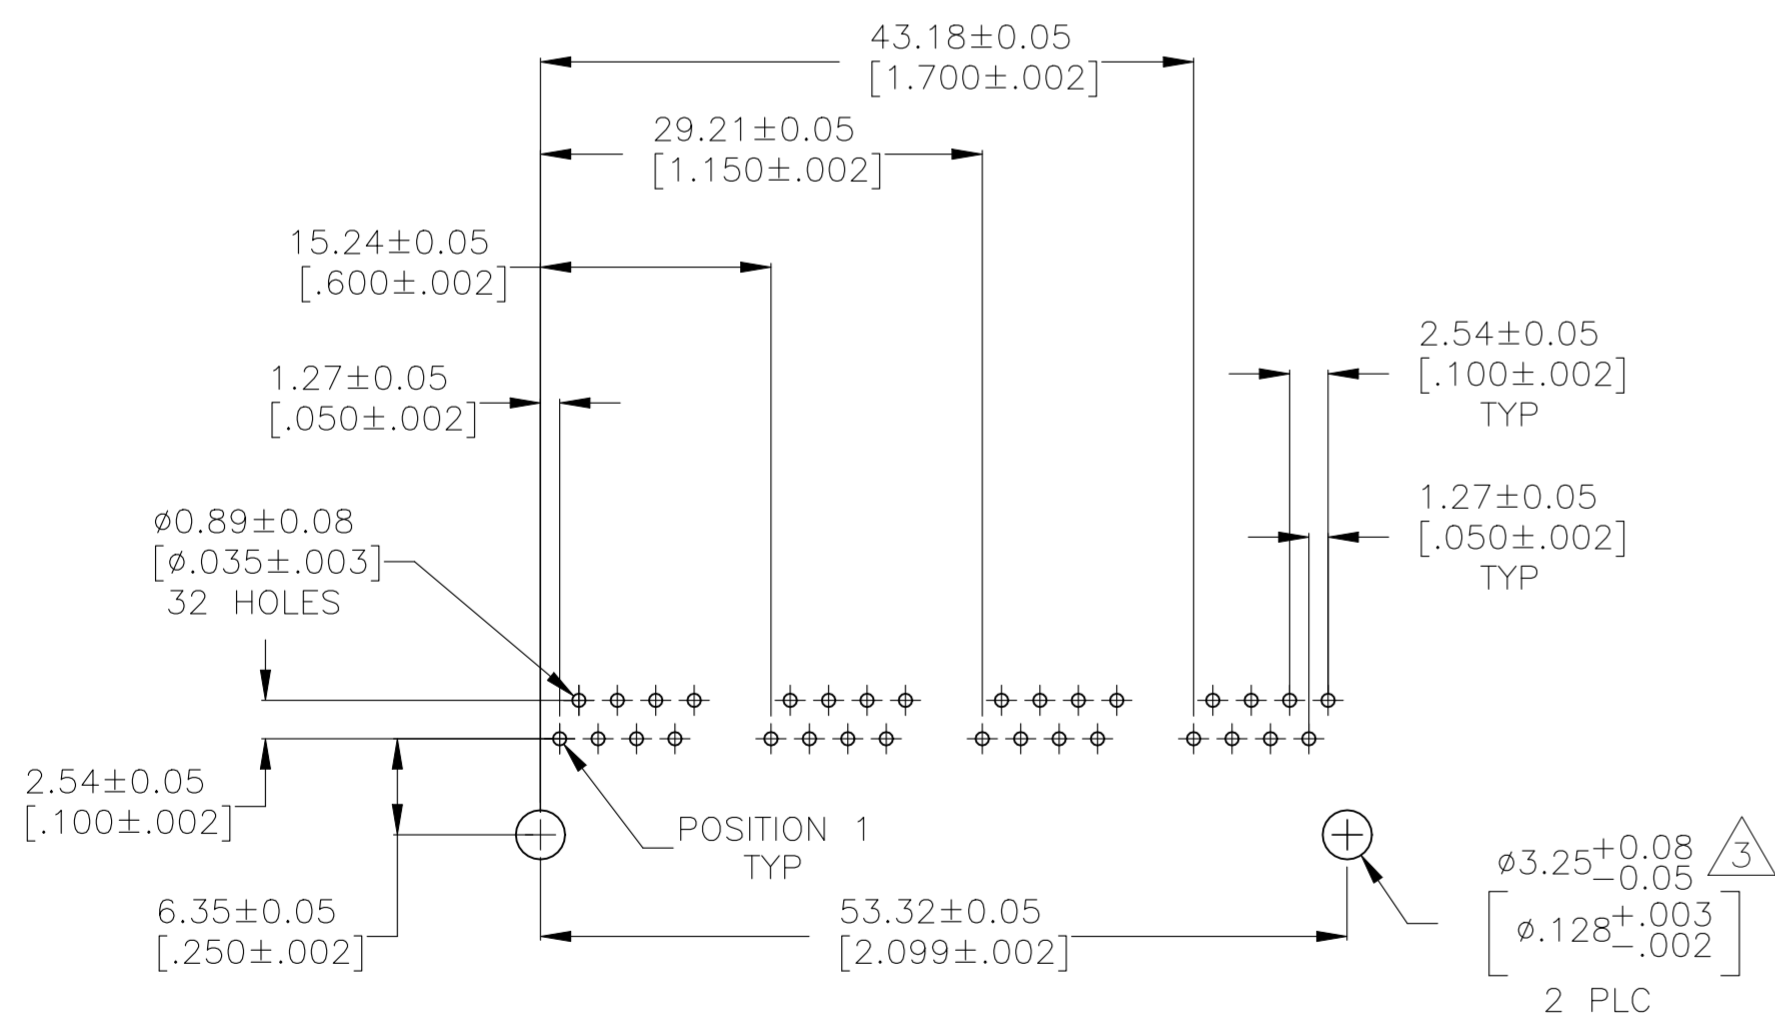

SUGGESTED PC BOARD LAYOUT
 COMPONENT SIDE
 SEE APPLICATION SPECIFICATION

3.05[.120]	1932095-2
3.56[.140]	1932095-1
DIM A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.ZHU 14MARCH08	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK C.WANG 14MARCH08	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S.YAO 14MARCH08	PRODUCT SPEC	
0 PLC ± -		108-1163-2		
1 PLC ± -		APPLICATION SPEC		
2 PLC ± 0.25[.010]		114-2048		
3 PLC ± -		SIZE	CAGE CODE	DRAWING NO
4 PLC ± -		WEIGHT	A2 00779	C=1932095
ANGLES ± -		CUSTOMER DRAWING		
FINISH		SCALE	SHEET	REV
SEE NOTE 1		2:1	1 OF 1	A1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)