


REV. 1  
DCO 15852

COIL: @ 25°C	
RESISTANCE	2000 OHMS ±10%
NOMINAL VOLTAGE	18.0 VDC
MUST OPERATE	4.5 mADC
MUST RELEASE	0.50 mADC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE TIME 15 MS MAX  
RELEASE TIME 10 MS MAX  
(CATALOG IS 8 MS OPERATE, 4 MS RELEASE)

CUSTOMER DATA SHEET

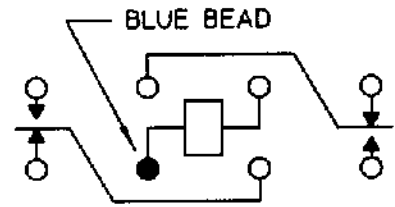

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO  
2 AMPS 30 VDC, 1 AMP 115 VAC 400 HZ  
RESISTIVE 100,000 OPERATIONS

DR. R.B. 2/20/98 CK.Gg # 10/8/99



CUST. HI-G  
CUST. NO. 2BK-2E-118 REV.

"SF" RELAY

SF6296H01

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)