THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - ,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| AD | 00 |

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | K | REVISED PER ECO-14-000066 | 27JUN2014 | NK | MM |

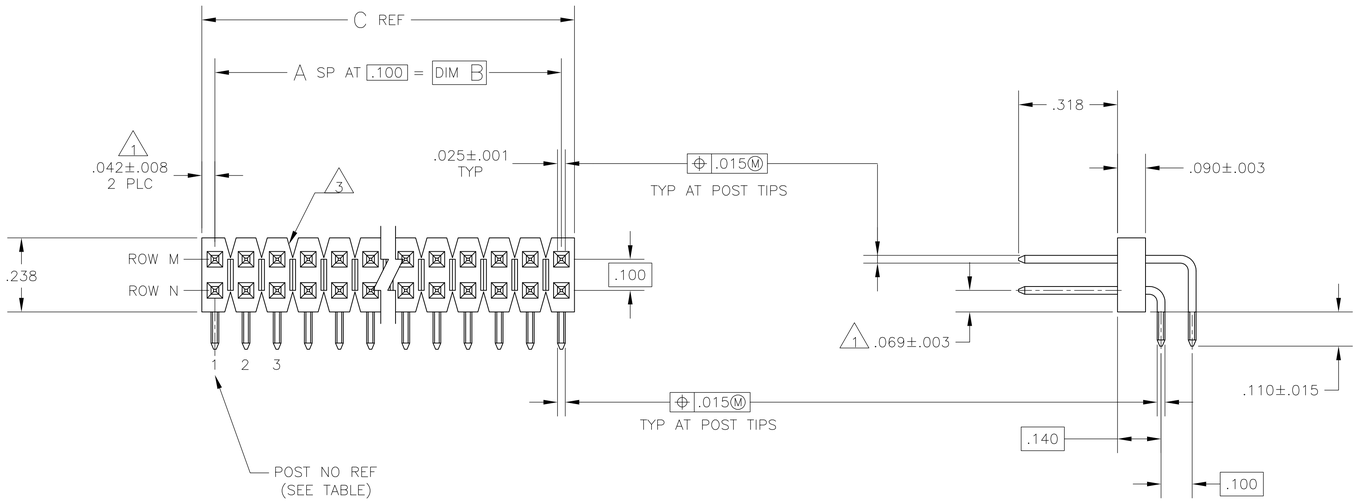


1. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING
2. FOR ACTIVE POSITION SIZES 4 AND ABOVE, POSTS WILL BE SELECTIVELY SWAGED TO PROVIDE CONNECTOR RETENTION TO THE PC BOARD UNTIL SOLDERED. FOR POSITION SIZE 2, POSTS WILL BE KINKED.(SEE TABLE FOR RETENTION FEATURE LOCATION)
3. BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
4. .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL, ON ENTIRE POST.
5. .000100-.000200 BRIGHT TIN OVER .000050 NICKEL, ON ENTIRE POST.
6. .000100-.000200 MATTE TIN OVER .000050 NICKEL, ON ENTIRE POST.
7. HIGH TEMPERATURE CONFIGURATION
8. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

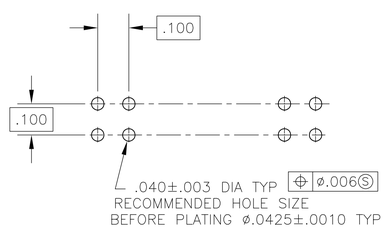


RECOMMENDED HOLE LAYOUT

| | REMARKS | PLATING | ROW N | ROW M | C | B | A | NO OF POSN | ASSEMBLY PART NUMBER |
|---|---|---|---|---|---|---|---|---|---|
| | | | HOLD-DOWN POST CONFIG LOCATION | | | | | | |
| | 7 | 6 | 1,2,39,40 | 1,2,39,40 | 3.984 | 3.900 | 39 | 80 | 7-104437-0 |
| | 7 | 6 | 1,2,29,30 | 1,2,29,30 | 2.984 | 2.900 | 29 | 60 | 6-104437-9 |
| | 7 | 6 | 1,2,24,25 | 1,2,24,25 | 2.484 | 2.400 | 24 | 50 | 6-104437-8 |
| | 7 | 6 | 1,2,19,20 | 1,2,19,20 | 1.984 | 1.900 | 19 | 40 | 6-104437-7 |
| | 7 | 6 | 1,2,16,17 | 1,2,16,17 | 1.684 | 1.600 | 16 | 34 | 6-104437-6 |
| | 7 | 6 | 1,2,14,15 | 1,2,14,15 | 1.484 | 1.400 | 14 | 30 | 6-104437-5 |
| | 7 | 6 | 1,2,13,14 | 1,2,13,14 | 1.384 | 1.300 | 13 | 28 | 6-104437-4 |
| OBSOLETE | 7 | 6 | 1,2,12,13 | 1,2,12,13 | 1.284 | 1.200 | 12 | 26 | 6-104437-3 |
| | 7 | 6 | 1,2,11,12 | 1,2,11,12 | 1.184 | 1.100 | 11 | 24 | 6-104437-2 |
| | 7 | 6 | 1,2,10,11 | 1,2,10,11 | 1.084 | 1.000 | 10 | 22 | 6-104437-1 |
| | 7 | 6 | 1,2,9,10 | 1,2,9,10 | .984 | .900 | 9 | 20 | 6-104437-0 |
| | 7 | 6 | 1,2,8,9 | 1,2,8,9 | .884 | .800 | 8 | 18 | 5-104437-9 |
| | 7 | 6 | 1,2,7,8 | 1,2,7,8 | .784 | .700 | 7 | 16 | 5-104437-8 |
| | 7 | 6 | 1,2,6,7 | 1,2,6,7 | .684 | .600 | 6 | 14 | 5-104437-7 |
| | 7 | 6 | 1,2,5,6 | 1,2,5,6 | .584 | .500 | 5 | 12 | 5-104437-6 |
| | 7 | 6 | 1,2,4,5 | 1,2,4,5 | .484 | .400 | 4 | 10 | 5-104437-5 |
| OBSOLETE | 7 | 6 | 1,2,3,4 | 1,2,3,4 | .384 | .300 | 3 | 8 | 5-104437-4 |
| | 7 | 6 | 1,2,3 | 1,2,3 | .284 | .200 | 2 | 6 | 5-104437-3 |
| | 7 | 6 | 1,2 | 1,2 | .184 | .100 | 1 | 4 | 5-104437-2 |
| | | 4 | 1,2,39,40 | 1,2,39,40 | 3.984 | 3.900 | 39 | 80 | 2-104437-0 |
| 8 | | 4 | 1,2,29,30 | 1,2,29,30 | 2.984 | 2.900 | 29 | 60 | 1-104437-9 |
| OBSOLETE | | 4 | 1,2,24,25 | 1,2,24,25 | 2.484 | 2.400 | 24 | 50 | 1-104437-8 |
| | | 4 | 1,2,19,20 | 1,2,19,20 | 1.984 | 1.900 | 19 | 40 | 1-104437-7 |
| | | 4 | 1,2,16,17 | 1,2,16,17 | 1.684 | 1.600 | 16 | 34 | 1-104437-6 |
| | | 4 | 1,2,14,15 | 1,2,14,15 | 1.484 | 1.400 | 14 | 30 | 1-104437-5 |
| | | 4 | 1,2,13,14 | 1,2,13,14 | 1.384 | 1.300 | 13 | 28 | 1-104437-4 |
| | | 4 | 1,2,12,13 | 1,2,12,13 | 1.284 | 1.200 | 12 | 26 | 1-104437-3 |
| 8 | | 4 | 1,2,11,12 | 1,2,11,12 | 1.184 | 1.100 | 11 | 24 | 1-104437-2 |
| | | 4 | 1,2,10,11 | 1,2,10,11 | 1.084 | 1.000 | 10 | 22 | 1-104437-1 |
| | | 4 | 1,2,9,10 | 1,2,9,10 | .984 | .900 | 9 | 20 | 1-104437-0 |
| OBSOLETE | | 4 | 1,2,8,9 | 1,2,8,9 | .884 | .800 | 8 | 18 | 104437-9 |
| | | 4 | 1,2,7,8 | 1,2,7,8 | .784 | .700 | 7 | 16 | 104437-8 |
| | | 4 | 1,2,6,7 | 1,2,6,7 | .684 | .600 | 6 | 14 | 104437-7 |
| | | 4 | 1,2,5,6 | 1,2,5,6 | .584 | .500 | 5 | 12 | 104437-6 |
| | | 4 | 1,2,4,5 | 1,2,4,5 | .484 | .400 | 4 | 10 | 104437-5 |
| 8 | | 4 | 1,2,3,4 | 1,2,3,4 | .384 | .300 | 3 | 8 | 104437-4 |
| OBSOLETE | | 4 | 1,2,3 | 1,2,3 | .284 | .200 | 2 | 6 | 104437-3 |
| | | 4 | 1,2 | 1,2 | .184 | .100 | 1 | 4 | 104437-2 |
| OBSOLETE | | 4 | 1 | 1 | .084 | - | - | 2 | 104437-1 |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± -
ANGLES ± -

MATERIAL: HOUSING CONTACT: COPPER ALLOY
FINISH: SEE TABLE

DWN H. MOLL 28JUN88
CHK R. FEIDT 28JUN88
APVD W PARKER 28JUN88
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME: HEADER ASSEMBLY, MOD II, BREAKAWAY, RIGHT ANGLE, DOUBLE ROW, .100X.100

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A1 | 00779 | C-104437 | — |

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV K



Downloaded From Oneyac.com

单击下面可查看定价，库存，交付和生命周期等信息

>>TE Connectivity(泰科)

Downloaded From Oneyac.com