


REV. 3
DCO 102710

.050 ± .002
DIA. PINS
GOLD PLATED

COIL: @ 25°C	
RESISTANCE	300 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	7.0 VDC MAX, 2.3 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	50 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES:	OPERATE & RELEASE 15 MS MAX.
	OPERATE BOUNCE 5 MS MAX
	RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

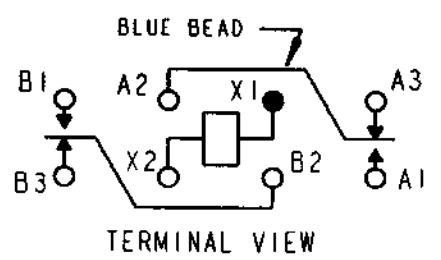

CONTACT RATING:	10 AMPS 28 VDC
	5 AMPS 115 VAC/400 Hz RESISTIVE
	50,000 OPERATIONS

DR. RB 8/6/93 CK. TLG 8-17-01

CII Technologies
advanced control electronic solutions

CUST. OPL
CUST. NO. M5757/23-004 REV.

"07" RELAY

B07D934BC2-0052

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)