

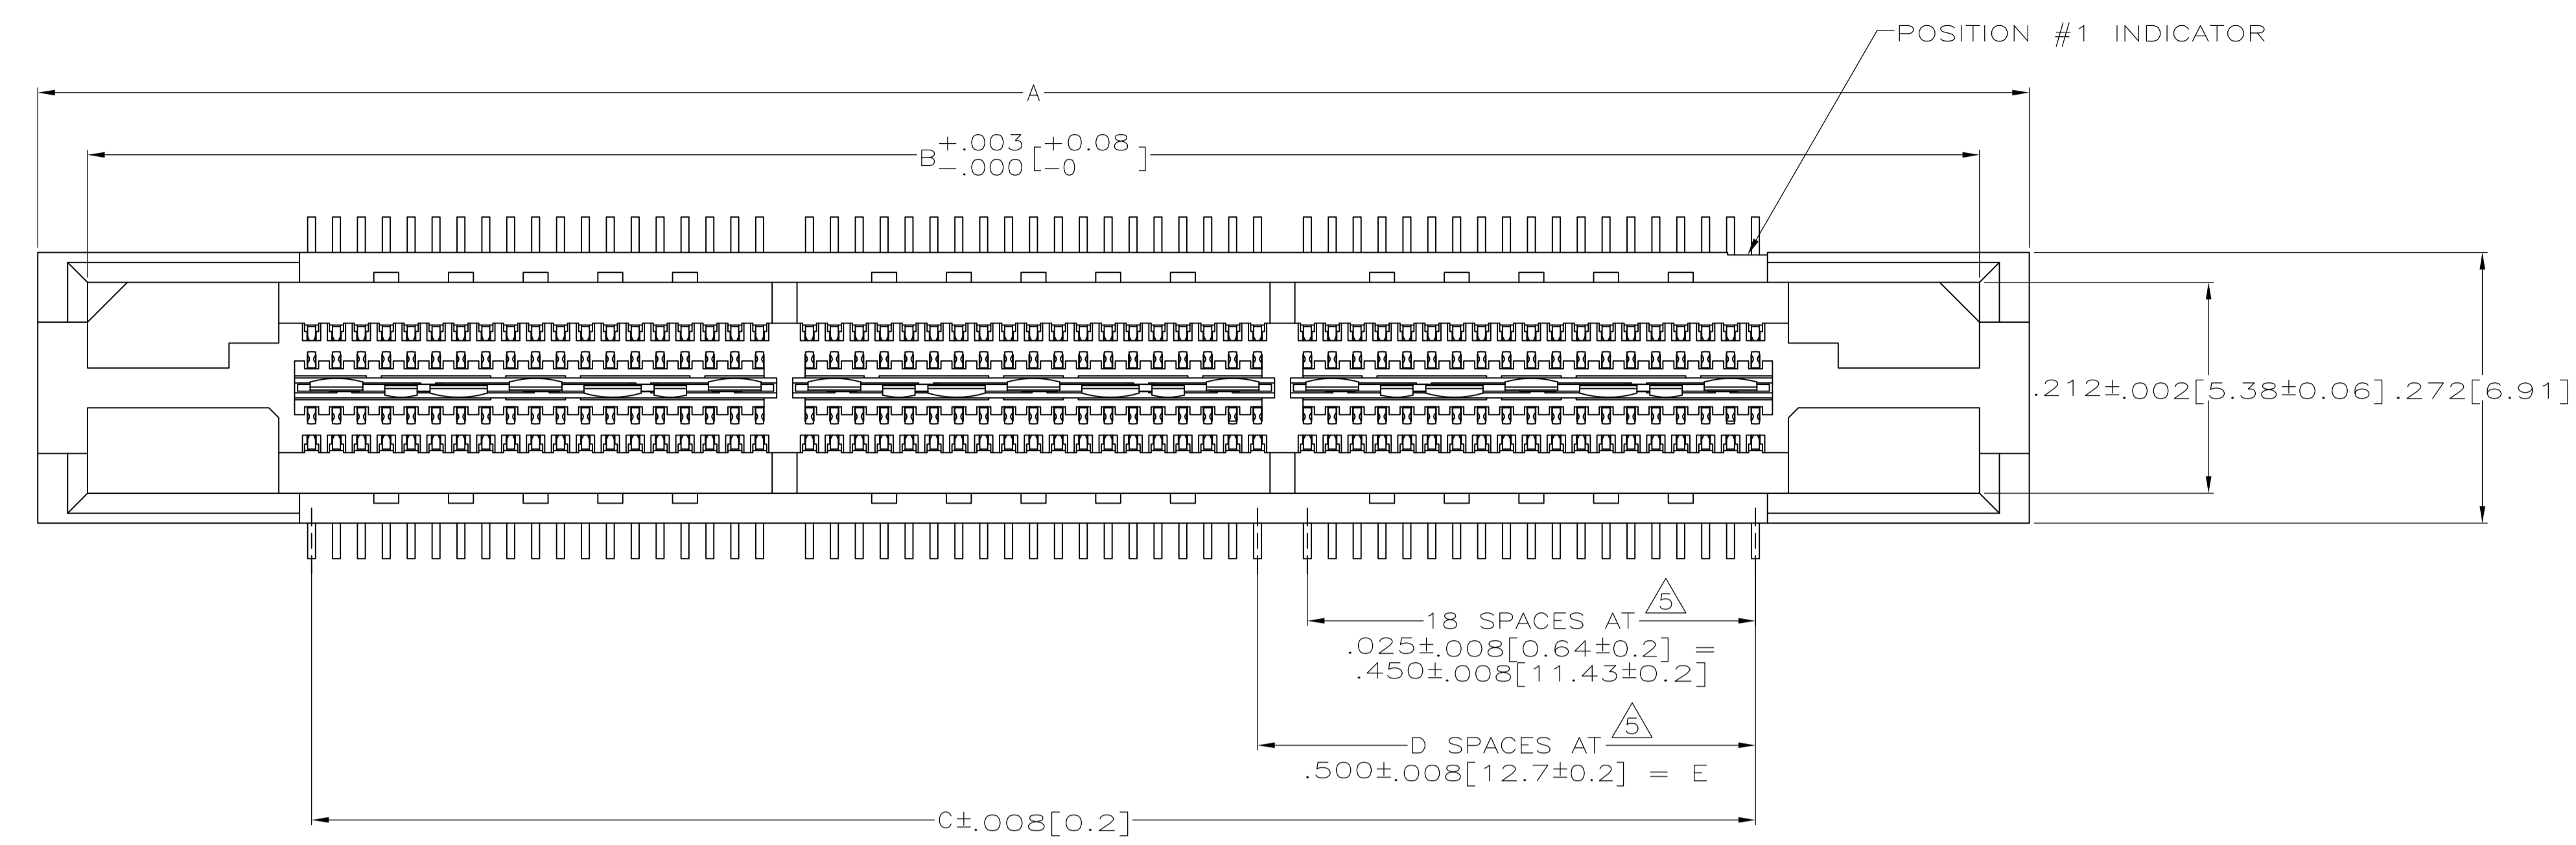
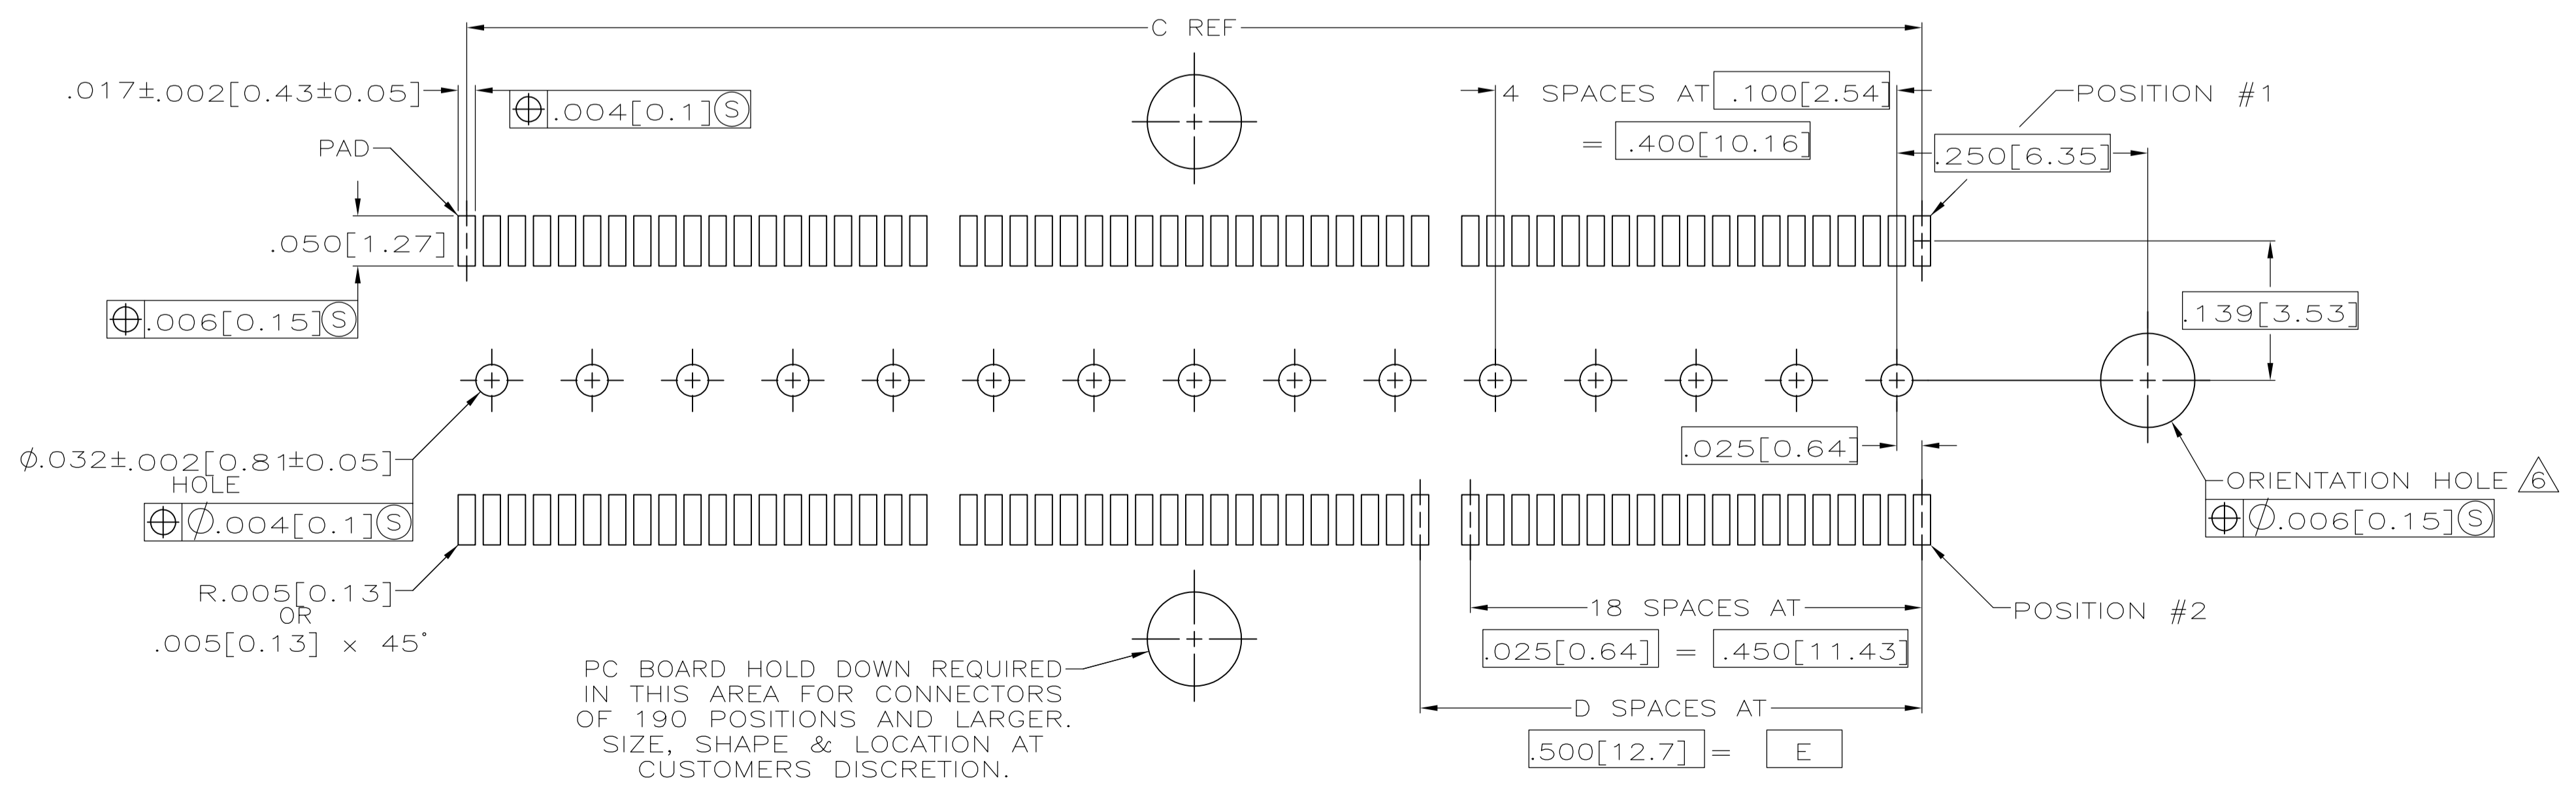


| LOC |                           | DIST |         | REVISIONS |     |      |  |
|-----|---------------------------|------|---------|-----------|-----|------|--|
| AD  | 47                        | REV  | DATE    | BY        | CHK | APPV |  |
| AC1 | REVISED PER ECO-11-004835 |      | 11MAR11 | RK        | HMR |      |  |

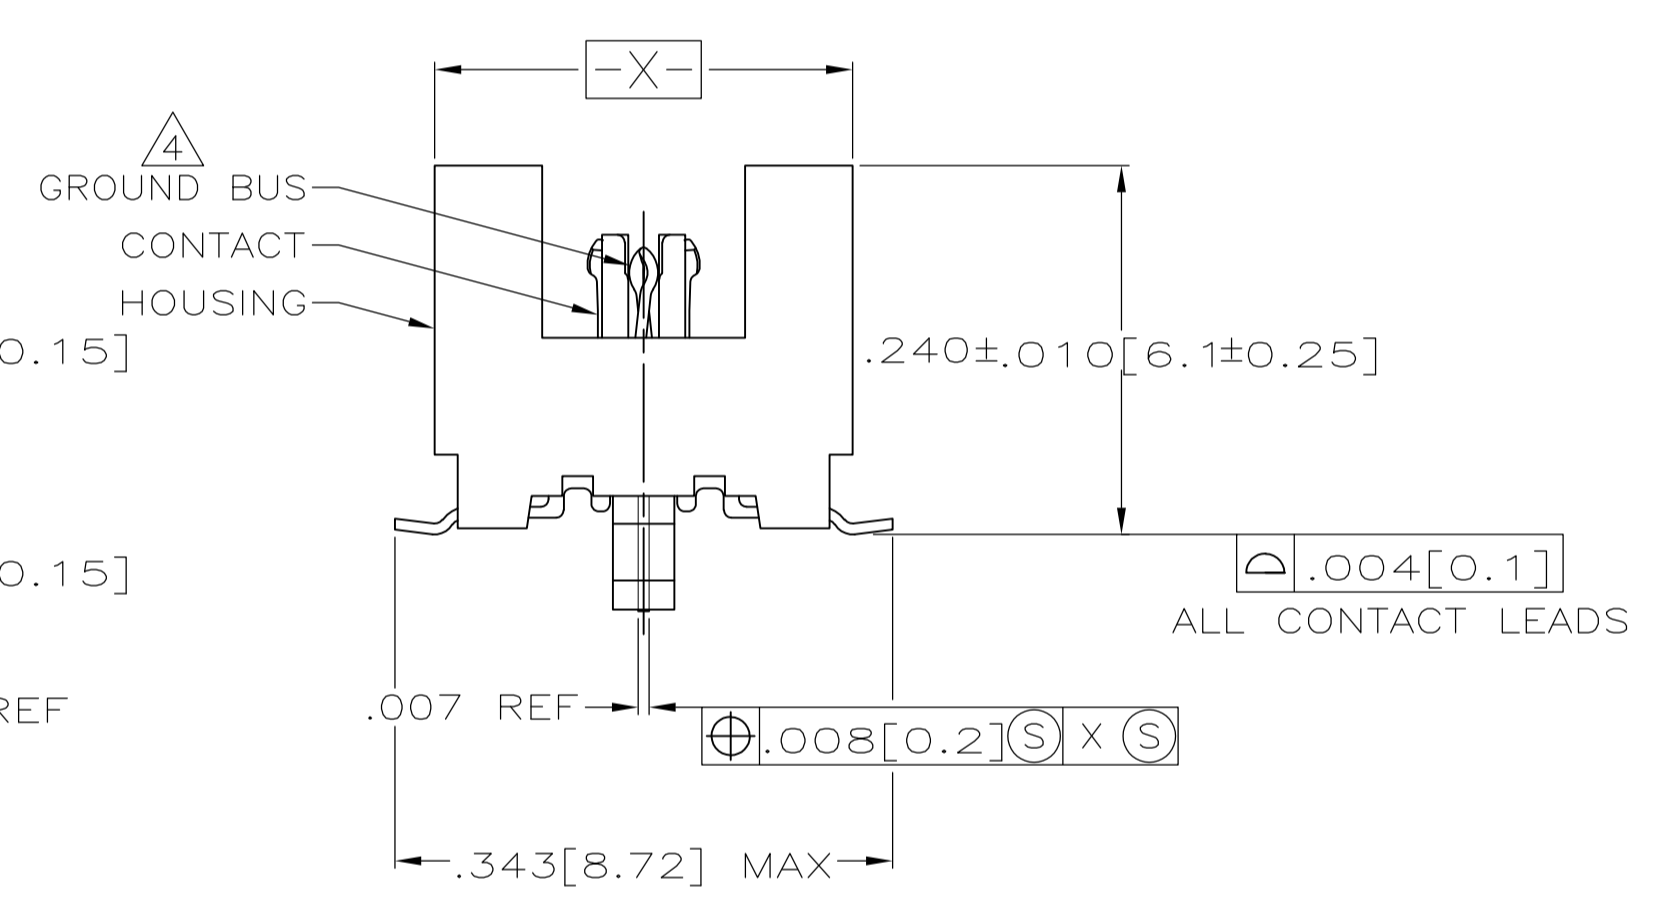

- $\triangle 1$  HOUSING: LIQUID CRYSTAL POLYMER, COLOR BLACK.  
CONTACTS: HIGH RELIABILITY COPPER ALLOY.  
GROUND BUSES: PHOSPHOR BRONZE ALLOY, UNS C51100.
- $\triangle 2$  CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL OVER, MATING SURFACE PLATED TO MEET LEVEL 1 PERFORMANCE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-1422, SOLDER TAILS PLATED TIN-LEAD.
- $\triangle 3$  DATE CODE MARKED IN AREA INDICATED ON SIDE OPPOSITE POSITION #1.
- $\triangle 4$  ONE GROUND BUS WITH 5 TAILS PER EACH MODULE.
- $\triangle 5$  TOLERANCE NON-ACCUMULATIVE.
- $\triangle 6$  FOR STANDARD APPLICATIONS, ORIENTATION HOLE TO BE  $\phi .094 \pm .002 [2.39 \pm 0.05]$ .  
FOR SLIP-FIT APPLICATIONS, ORIENTATION HOLE TO BE  $\phi .079 \pm .001 [2.00 \pm 0.03]$ .

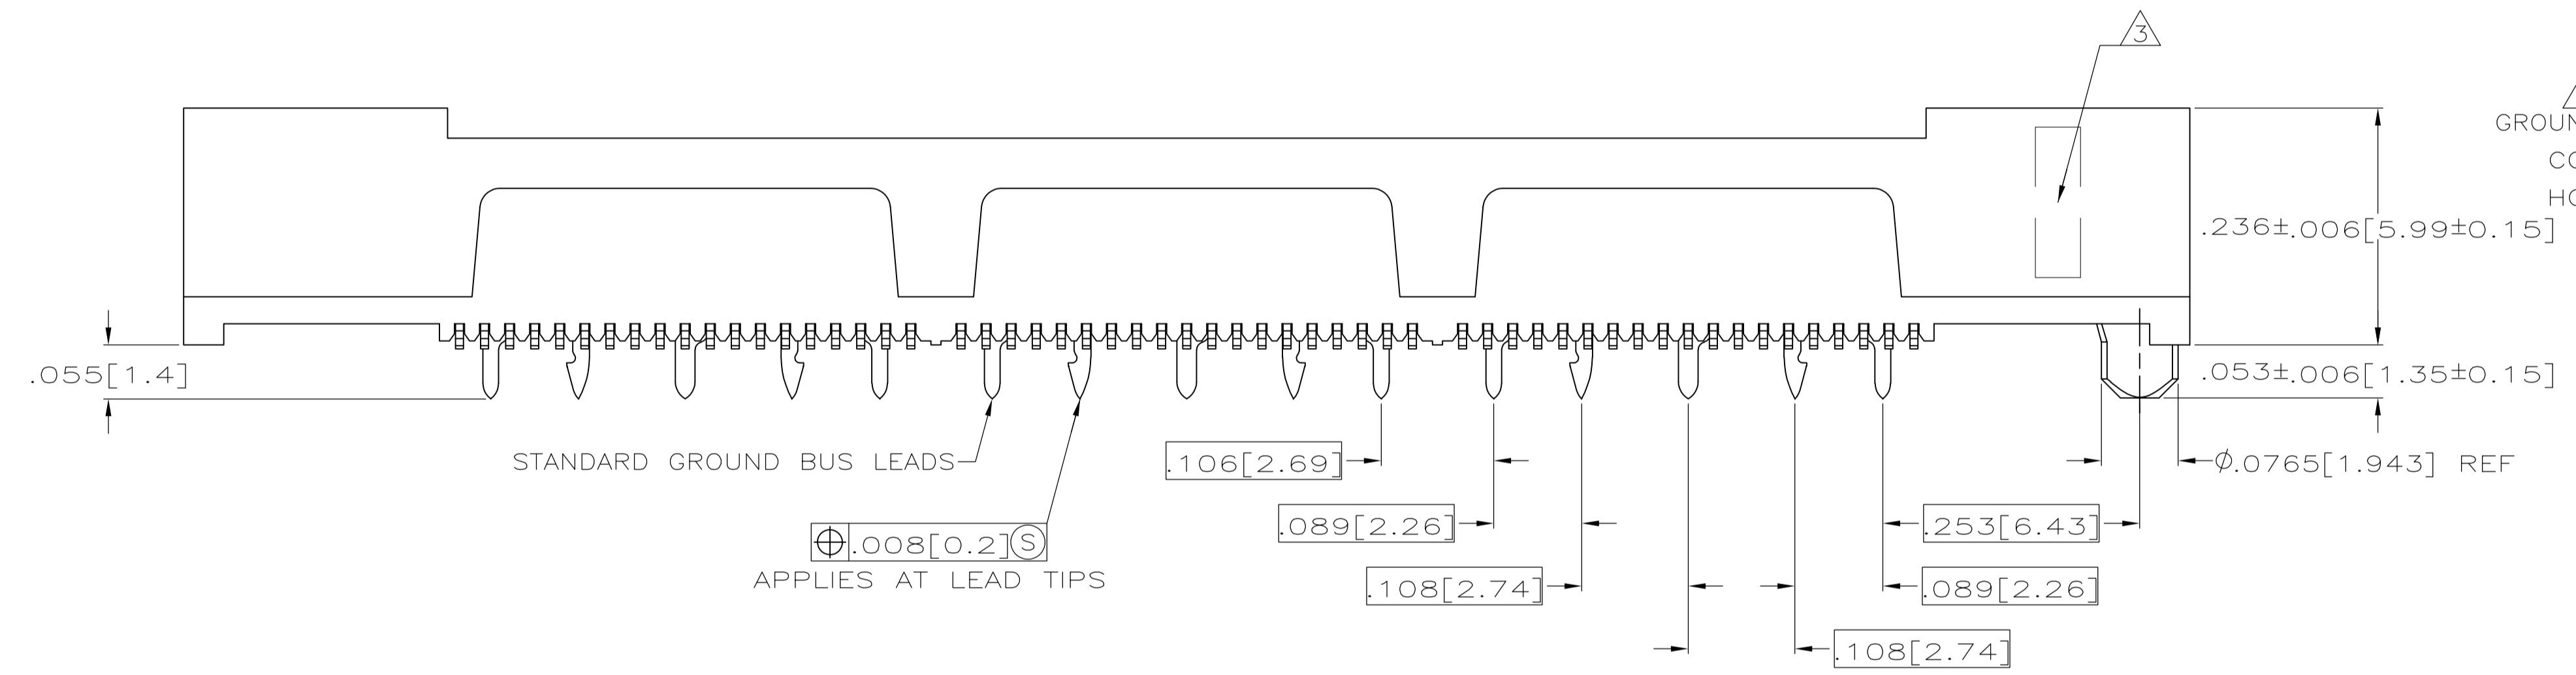

RECOMMENDED PC BOARD LAYOUT (VIEWED FROM CONNECTOR SIDE)

| 3.000 [76.2] | 6 | 3.450 [87.63] | 3.900 [99.06] | 4.000 [101.6] | 266       | 2-767004-8  |
|--------------|---|---------------|---------------|---------------|-----------|-------------|
| 2.500 [63.5] | 5 | 2.950 [74.93] | 3.400 [86.36] | 3.500 [88.9]  | 228       | 2-767004-7  |
| 2.000 [50.8] | 4 | 2.450 [62.23] | 2.900 [73.66] | 3.000 [76.2]  | 190       | 2-767004-6  |
| 1.500 [38.1] | 3 | 1.950 [49.53] | 2.400 [60.96] | 2.500 [63.5]  | 152       | 2-767004-5  |
| 1.000 [25.4] | 2 | 1.450 [36.83] | 1.900 [48.26] | 2.000 [50.8]  | 114       | 2-767004-4  |
| .500 [12.7]  | 1 | .950 [24.13]  | 1.400 [35.56] | 1.500 [38.1]  | 76        | 2-767004-3  |
| .000 [0]     | 0 | .450 [11.43]  | .900 [22.86]  | 1.000 [25.4]  | 38        | 2-767004-2  |
| E            | D | C             | B             | A             | NO OF POS | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

|        |              |
|--------|--------------|
| 0 PL   | ± -          |
| 1 PL   | ± -          |
| 2 PL   | ± -          |
| 3 PL   | ± .005(0.13) |
| 4 PL   | ± -          |
| ANGLES | ± -          |

MATERIAL  $\triangle 1$  FINISH  $\triangle 2$

REVISED PER ECO-11-004835

DATE 11MAR11

BY RK

CHK P. MATAR

APPV A. MONK

NAME RECEPTACLE ASSEMBLY, VERTICAL, .025[0.64]CL, GULL WING LEADS, MICTOR

PRODUCT SPEC 108-1422

APPLICATION SPEC 114-11004

SIZE A1

WEIGHT -


CUSTOMER DRAWING

SCALE 8:1

SHEET 1 OF 2


REV A1

THESE PART NUMBERS ARE THE SAME AS 2-767004-2 THRU 2-767004-8 EXCEPT AS SHOWN

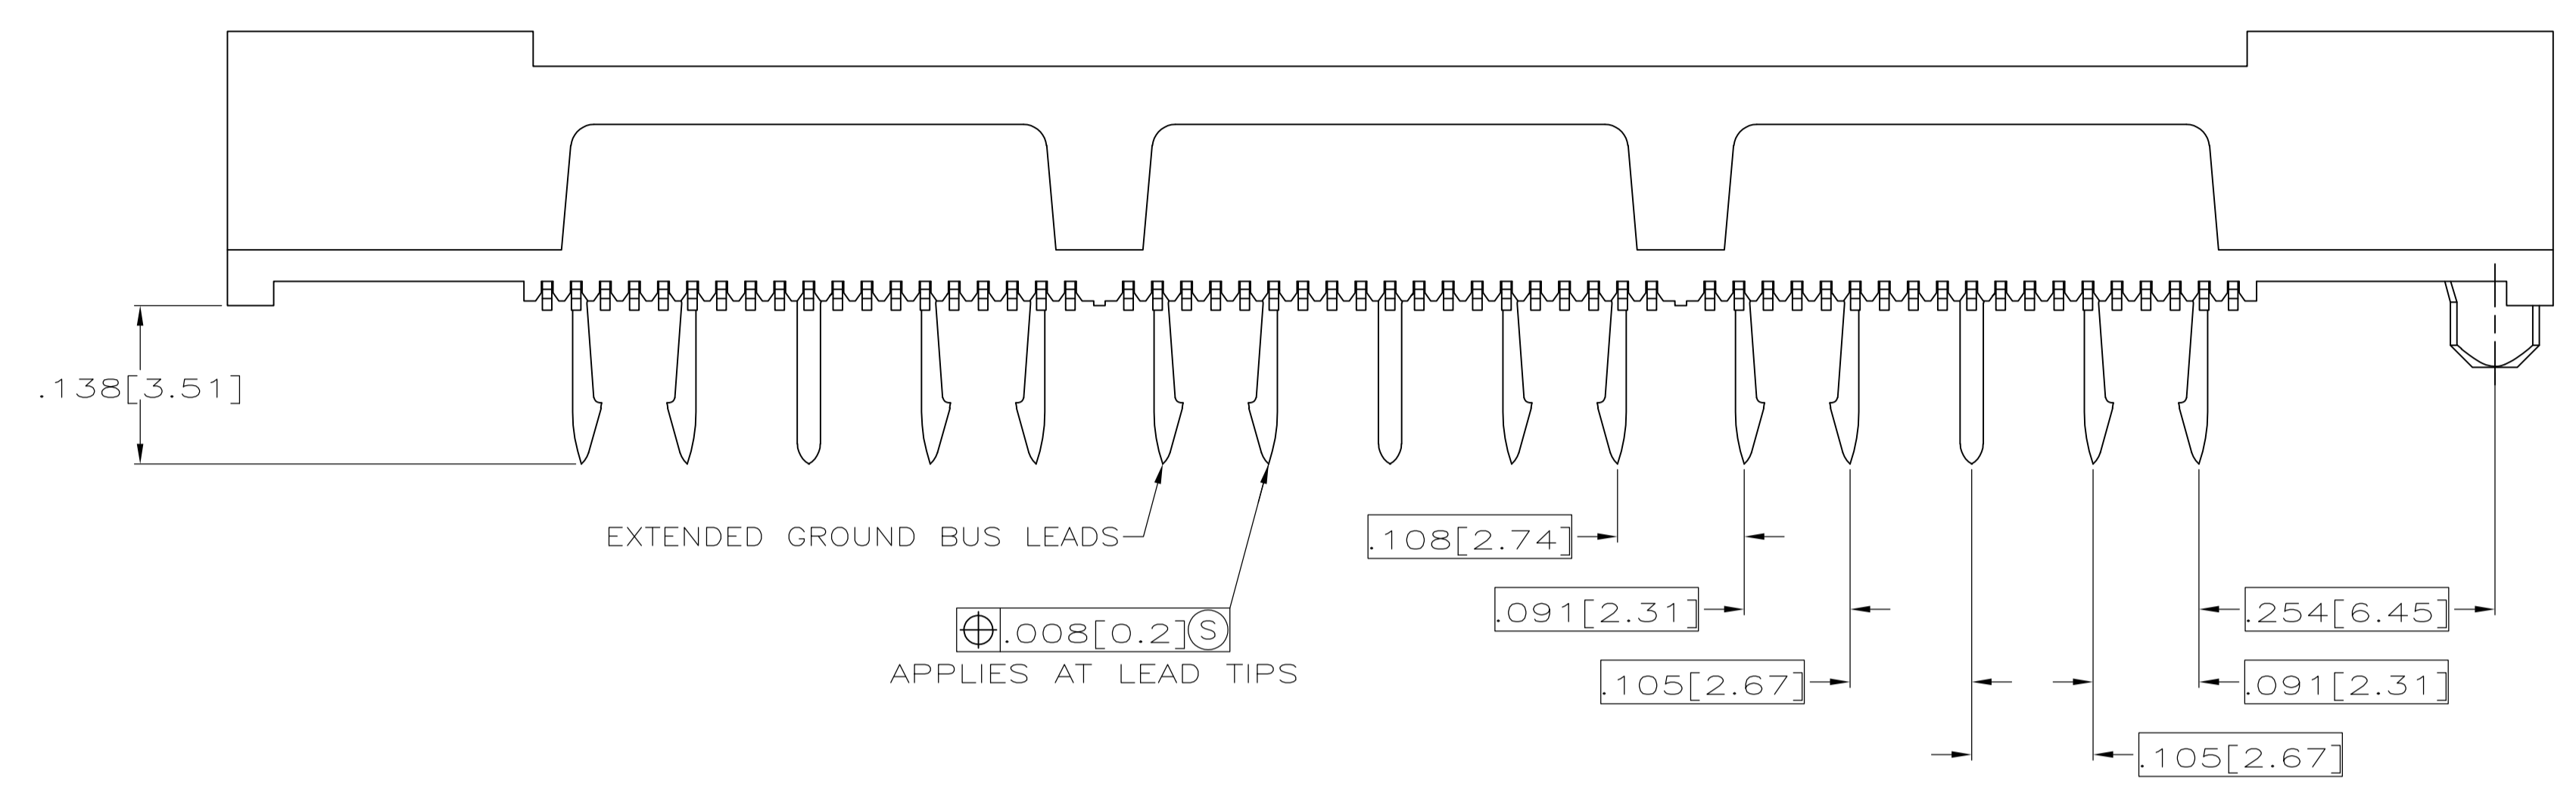

|          |              |   |               |               |               |            |             |
|----------|--------------|---|---------------|---------------|---------------|------------|-------------|
| OBSOLETE | 3.000 [76.2] | 6 | 3.450 [87.63] | 3.900 [99.06] | 4.000 [101.6] | 266        | 1-767004-4  |
| OBSOLETE | 2.500 [63.5] | 5 | 2.950 [74.93] | 3.400 [86.36] | 3.500 [88.9]  | 228        | 1-767004-3  |
| OBSOLETE | 2.000 [50.8] | 4 | 2.450 [62.23] | 2.900 [73.66] | 3.000 [76.2]  | 190        | 1-767004-2  |
| OBSOLETE | 1.500 [38.1] | 3 | 1.950 [49.53] | 2.400 [60.96] | 2.500 [63.5]  | 152        | 1-767004-1  |
| OBSOLETE | 1.000 [25.4] | 2 | 1.450 [36.83] | 1.900 [48.26] | 2.000 [50.8]  | 114        | 1-767004-0  |
| OBSOLETE | .500 [12.7]  | 1 | .950 [24.13]  | 1.400 [35.56] | 1.500 [38.1]  | 76         | 767004-9    |
| OBSOLETE | .000 [0]     | 0 | .450 [11.43]  | .900 [22.86]  | 1.000 [25.4]  | 38         | 767004-8    |
|          | E            | D | C             | B             | A             | NO. OF POS | PART NUMBER |

THESE PART NUMBERS ARE THE SAME AS 2-767004-2 THRU 2-767004-8 EXCEPT AS SHOWN

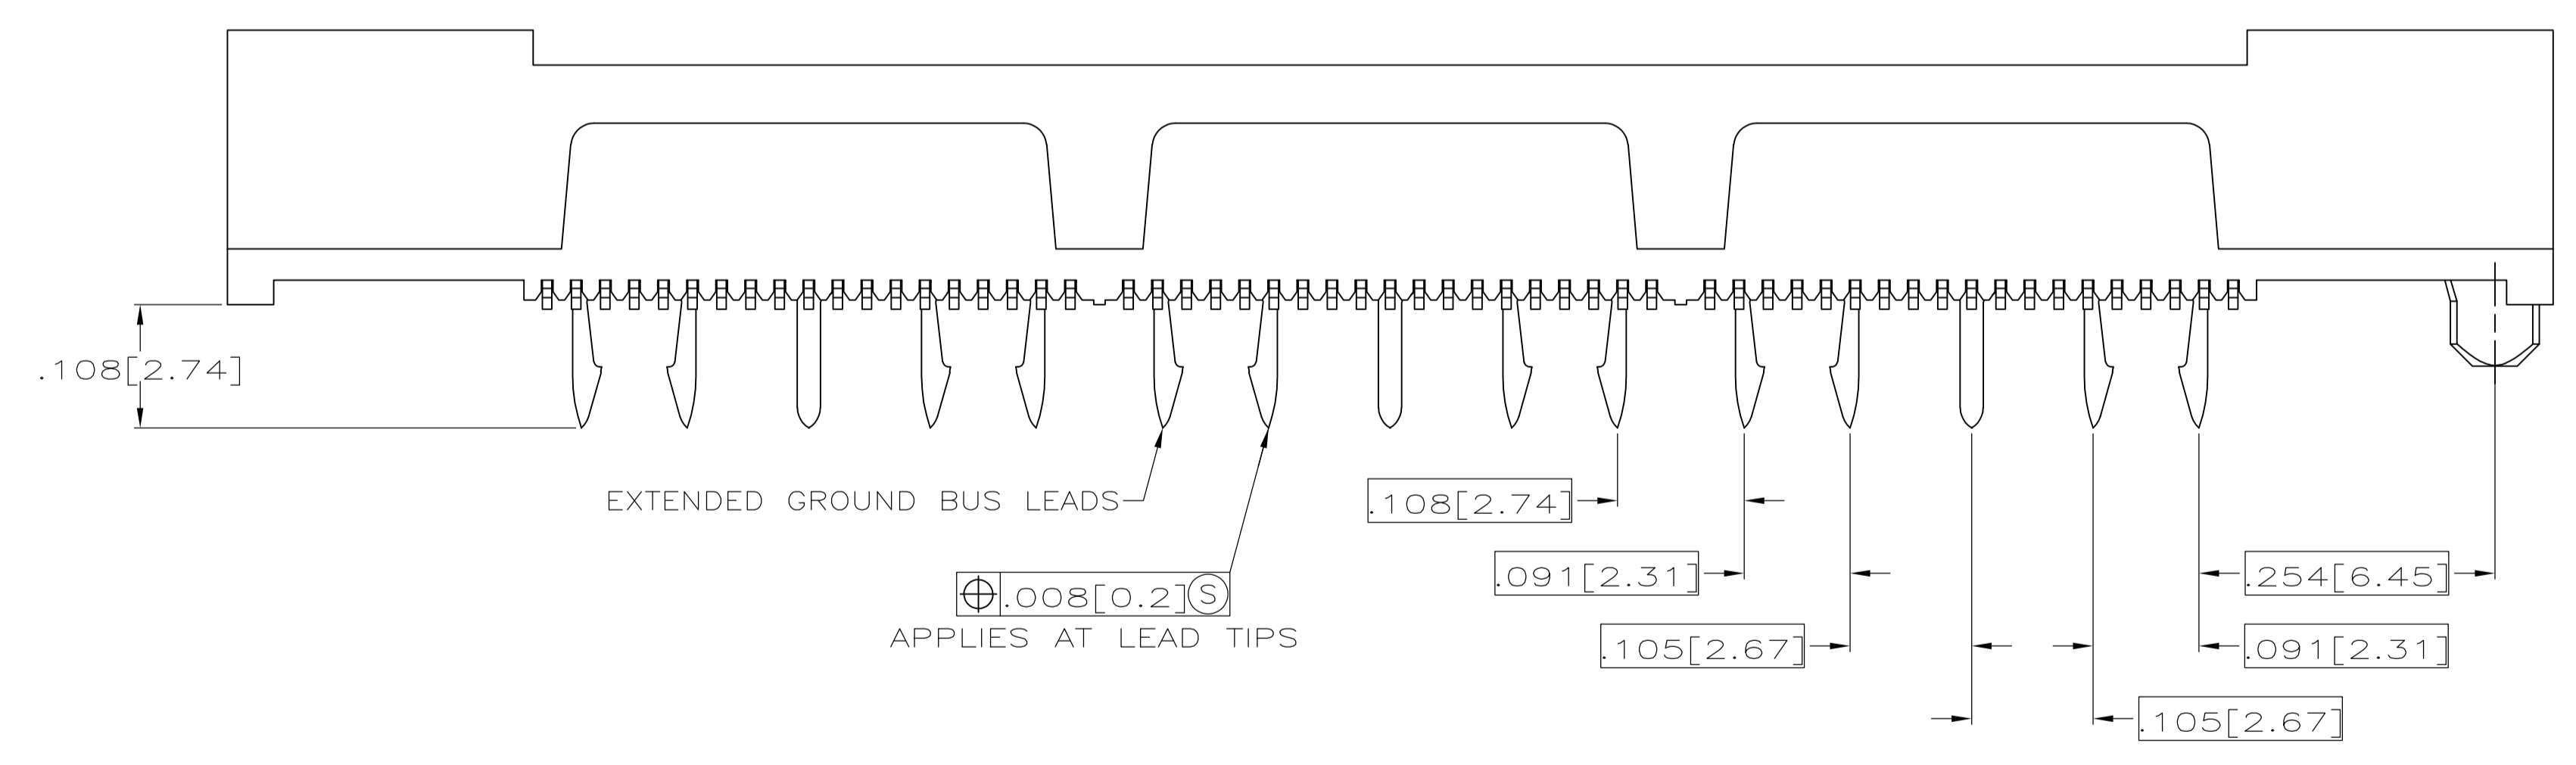

|          |              |   |               |               |               |            |             |
|----------|--------------|---|---------------|---------------|---------------|------------|-------------|
| OBSOLETE | 3.000 [76.2] | 6 | 3.450 [87.63] | 3.900 [99.06] | 4.000 [101.6] | 266        | 767004-7    |
| OBSOLETE | 2.500 [63.5] | 5 | 2.950 [74.93] | 3.400 [86.36] | 3.500 [88.9]  | 228        | 767004-6    |
| OBSOLETE | 2.000 [50.8] | 4 | 2.450 [62.23] | 2.900 [73.66] | 3.000 [76.2]  | 190        | 767004-5    |
| OBSOLETE | 1.500 [38.1] | 3 | 1.950 [49.53] | 2.400 [60.96] | 2.500 [63.5]  | 152        | 767004-4    |
| OBSOLETE | 1.000 [25.4] | 2 | 1.450 [36.83] | 1.900 [48.26] | 2.000 [50.8]  | 114        | 767004-3    |
| OBSOLETE | .500 [12.7]  | 1 | .950 [24.13]  | 1.400 [35.56] | 1.500 [38.1]  | 76         | 767004-2    |
| OBSOLETE | .000 [0]     | 0 | .450 [11.43]  | .900 [22.86]  | 1.000 [25.4]  | 38         | 767004-1    |
|          | E            | D | C             | B             | A             | NO. OF POS | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIN J. GERACE 7-25-97  
 CHK S. STRICKLER 7-25-97  
 APVD A. MONK 7-25-97

**STE** TE Connectivity

NAME: RECEPTACLE ASSEMBLY, VERTICAL, .025[0.64]CL, GULL WING LEADS, MICTOR

PRODUCT SPEC: 108-1422

APPLICATION SPEC: 114-11004

SIZE: A1 CAGE CODE: 00779 DRAWING NO: 767004

RESTRICTED TO: CUSTOMER DRAWING

SCALE: 8:1 SHEET: 2 OF 2 REV: AC1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)