


REVISIONS		DATE	APPROVED
ZONE	LTR	DESCRIPTION	
	N/C	RELEASED PER ECN T-18675	10/93 R. Haagman
	A	REVISED PER ECN T-19034	3-22-94 R. Haag

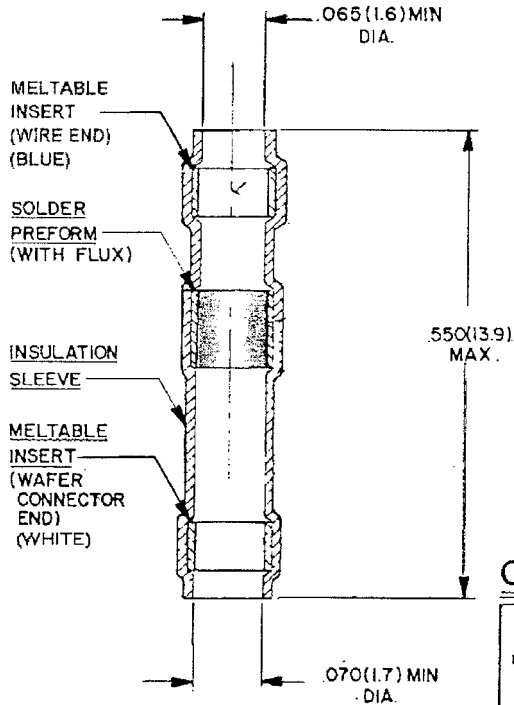

NOTES :

1. MATERIALS

- I-A INSULATION SLEEVE; HEAT SHRINKABLE, RADIATION CROSSLINKED MODIFIED POLYVINYLIDENE FLUORIDE, TRANSPARENT BLUE.
- I-B SOLDER PREFORM; SOLDER PREFORM WITH FLUX TYPE: SN96 SRAP PER Q0-S-57I.
- I-C MELTABLE INSERTS; LOW OUTGASSING IMMERSION RESISTANT THERMOPLASTIC

2. THIS SLEEVE IS DESIGNED TO ATTACH 20 THROUGH 26 GAGE CONDUCTORS TO THE TERMINALS OF A **Raychem** MTC100 SERIES WAFER.

© Raychem Corporation 1979

CONNECTOR SPECIFICATION CONTROL DRAWING

If this document is printed it becomes uncontrolled.  
Check with the web for latest revision.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES BRACKETED DIMENSIONS ( ) ARE METRIC AND TOLERANCES ARE:  XXX ± ( M M ) XX ± ( M M ) Δ ±	DRAWN	D PIQUE	93SEP29	<b>Raychem</b> <small>RAYCHEM CORPORATION 300 CONSTITUTION DR. MENLO PARK CA.</small>
	CHECKED	R.W.	10-28-93	
	APPROVED	Boyer	10-93	
	APPROVED			
TITLE				SOLDER SLEEVE WIRE TERMINATOR DOUBLE SEAL FOR TEMP RATING (150°C) (SN96) MTC100 SERIES
PROJECT				0225.PCX
SIZE		CODE IDENT	DWG. NO.	<b>CTA-0225</b>
A		NO. 06090		
DO NOT SCALE THIS DRAWING			WEIGHT	SHEET 1 OF 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)