


PC BOARD LAYOUT

- 1 HOUSING MATERIAL: GLASS-FILLED POLYMER.
- 2 POST MATERIAL: COPPER ALLOY.
- 3 POST FINISH: DIN 41612 CLASS 3 IN CONTACT AREA. TIN PLATE ON POSTS.
- 4 POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- 5 RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- 6 PART NUMBER, DATE CODE MARKED THIS APPROXIMATE AREA.
- 7 MARKING ON THIS SIDE.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 9 POST FINISH: .000030 MIN GOLD IN CONTACT AREA TIN PLATE ON POSTS.

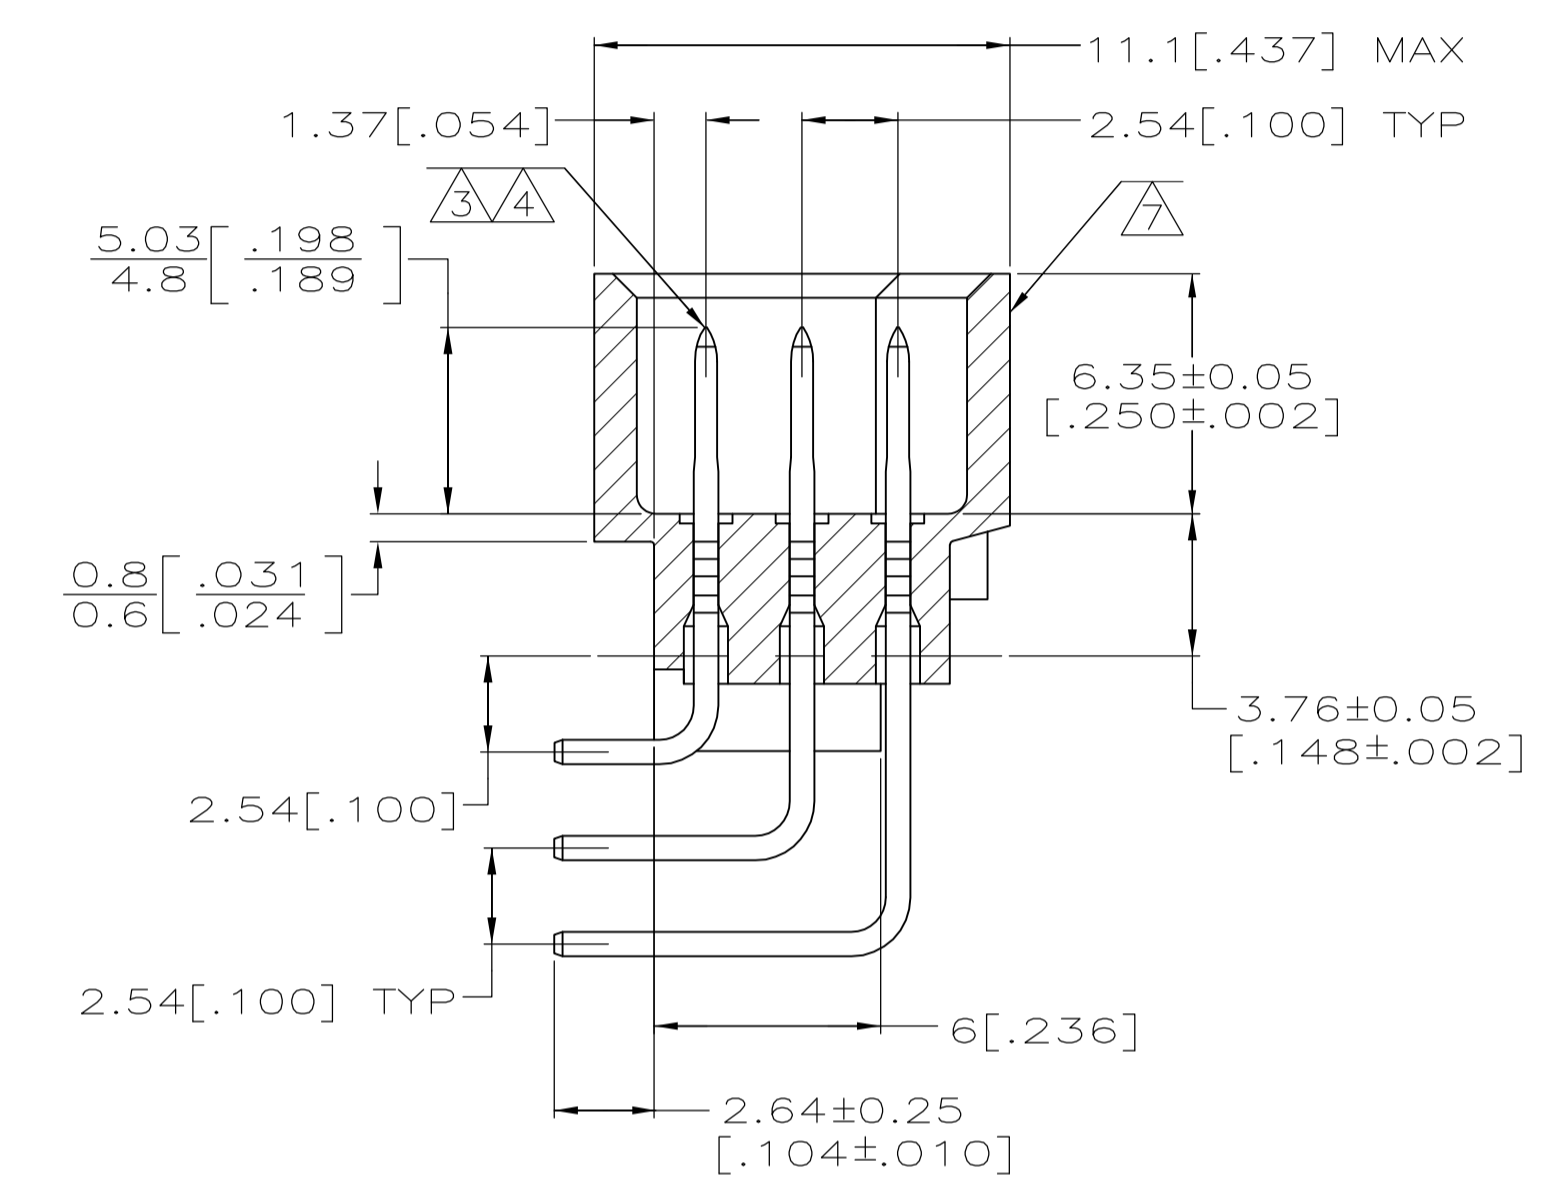

SECTION Z-Z

REFERENCE FAMILY DRAWING 650473 FOR ALL TYPE C HEADER OFFERINGS

NOTES	POSITIONS LOADED	ROWS LOADED	NO. OF LOADED POSITION	ASSY PART NUMBER
1-16	X X X	48	-5650478-9	
1-16	X X X	48	5650478-6	
1-16	X X X	48	5650478-5	

THIS DRAWING IS A CONTROLLED DOCUMENT.		BIN J. POLIGNONE OSMAVOS		TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:			
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - ANGLES ± -		DIMAYOS OSMAVOS A. SHARPE OSMAVOS A. SHARPE OSMAVOS PRODUCT SPEC		NAME ASSEMBLY, PIN, EUROCARD, TYPE 1/2C, 48 POSITION, 2.64[.104] SOLDER POST	
MATERIAL		FINISH		SIZE	RESTRICTED TO
1 2		3 4 9		A1 00779 C=5650478	SCALE 5:1 SHEET 1 OF 1 REV S

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)