




LOC	DIST	REVISIONS					
AJ	16	P	LTR	DESCRIPTION	DATE	DWN	APVD
		J		REVISED PER EC 0514-0457-04	04NOV05	TS	JL
		J1		REVISED PER ECO-09-021826	12SEP09	KK	AEG

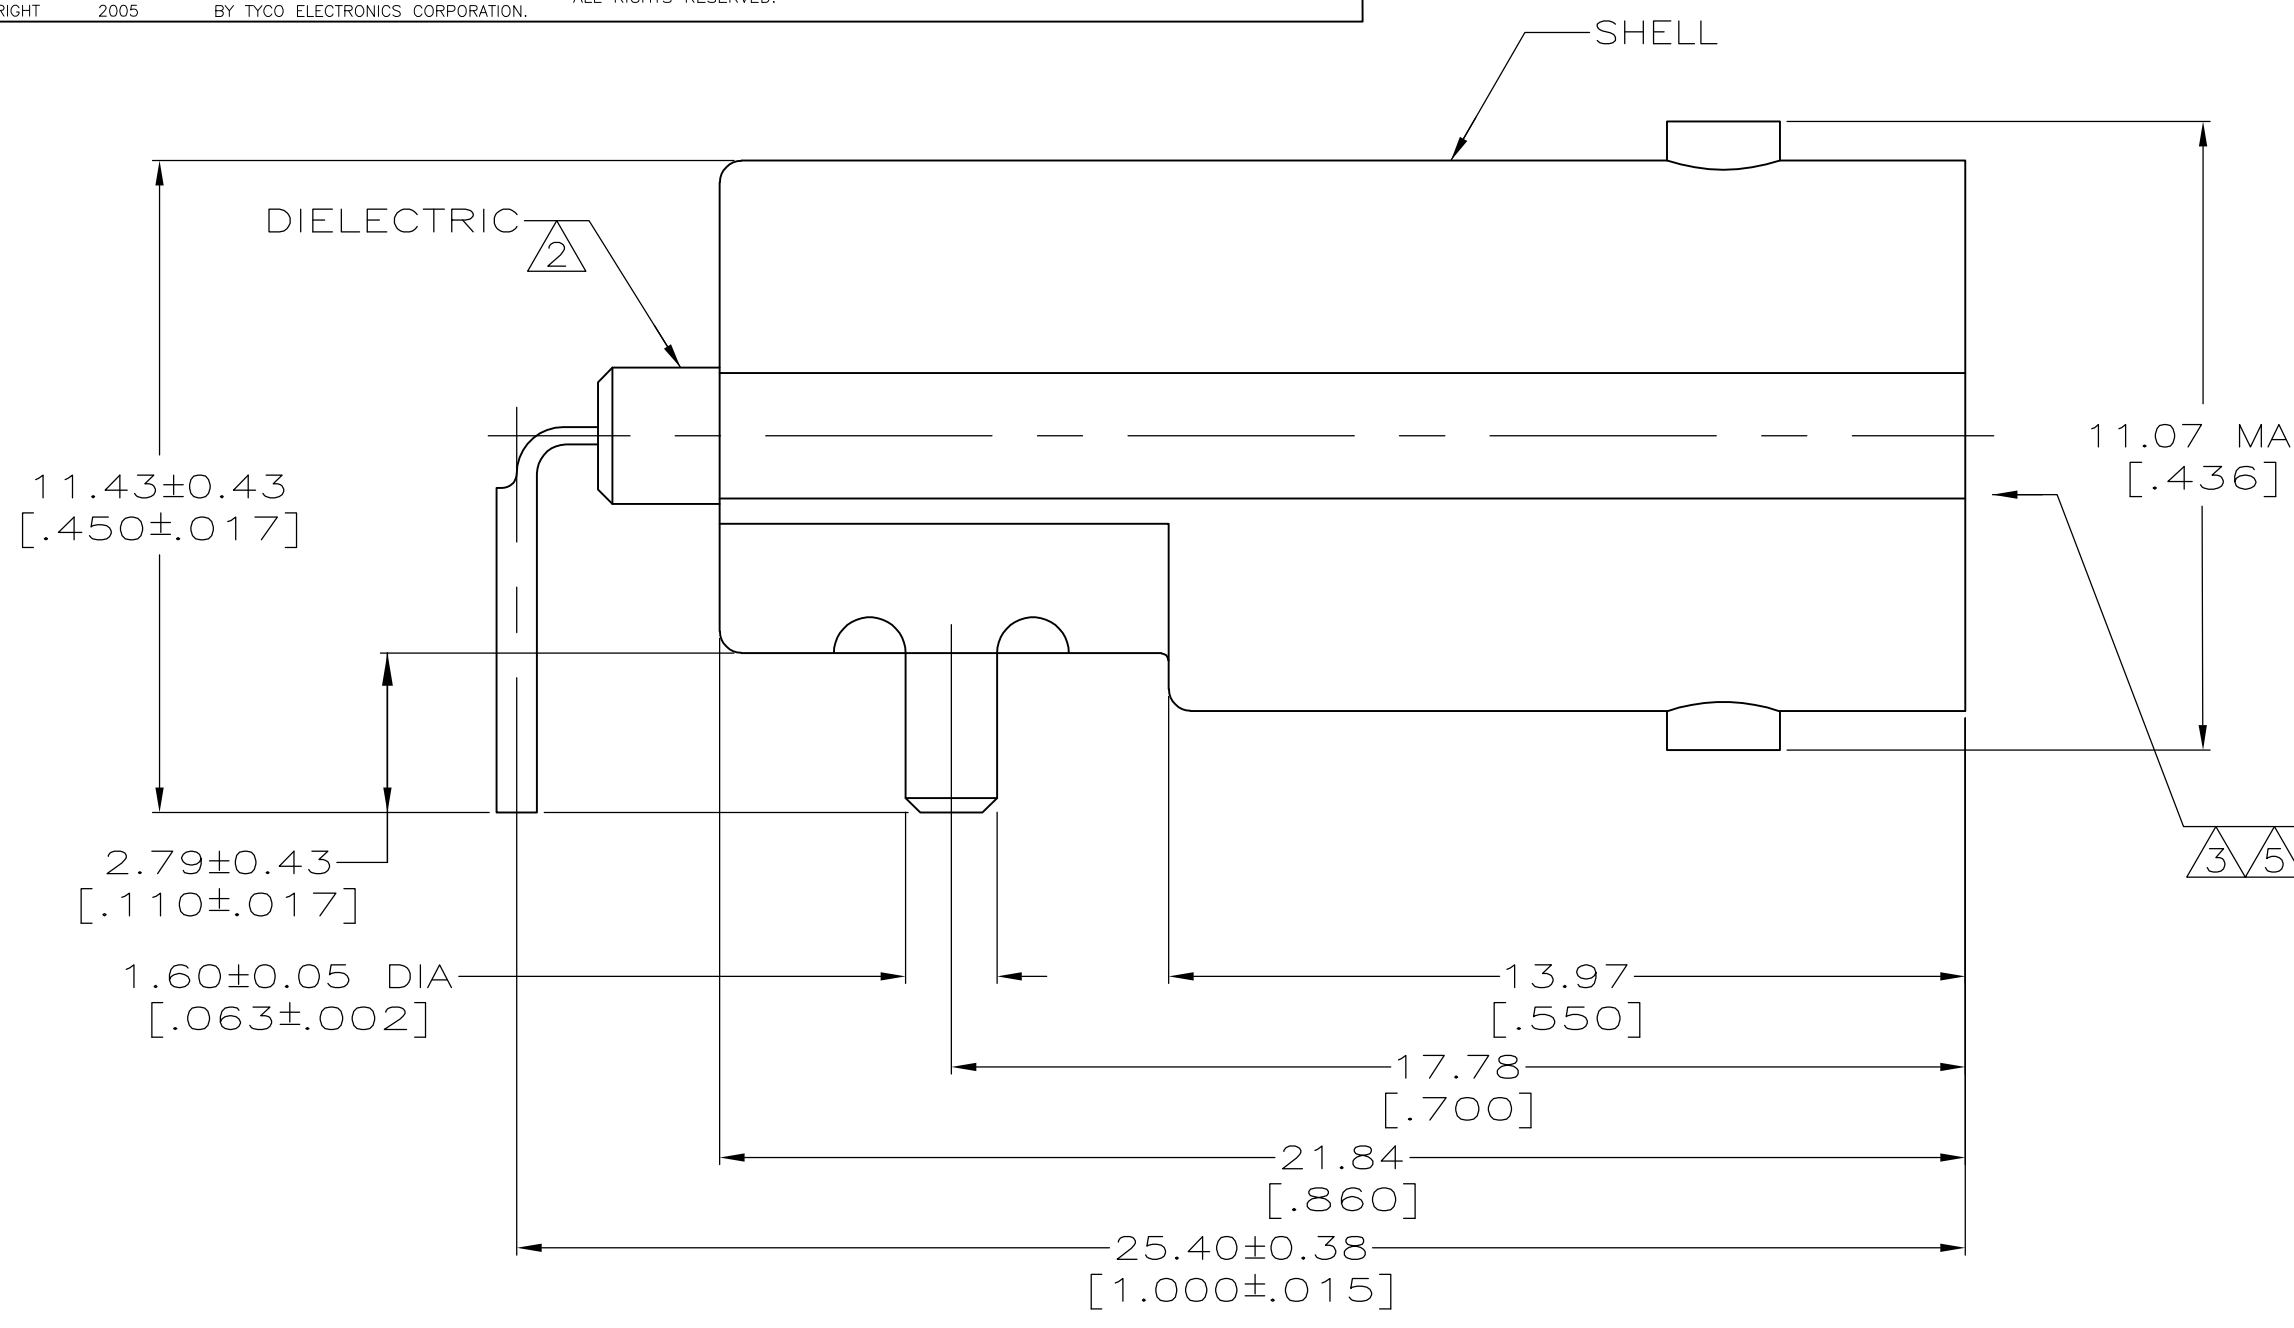

- ① ZINC PER QQ-Z-363.
- ② POLYMETHYLPENTENE, GENERAL PURPOSE.
- ③ PHOSPHOR BRONZE PER QQ-B-750.
- ④ NICKEL PLATE PER QQ-N-290, 3.81 μm [.000150] MINIMUM THICK.
- ⑤ GOLD PLATE PER MIL-G-45204, 0.76 μm [.000030] MINIMUM THICK.
- ⑥ ZAMAK 8
- ⑦ TIN PLATE PER ASTM-B-545, 3.81 μm [.000150] MINIMUM THICK.
- ⑧ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

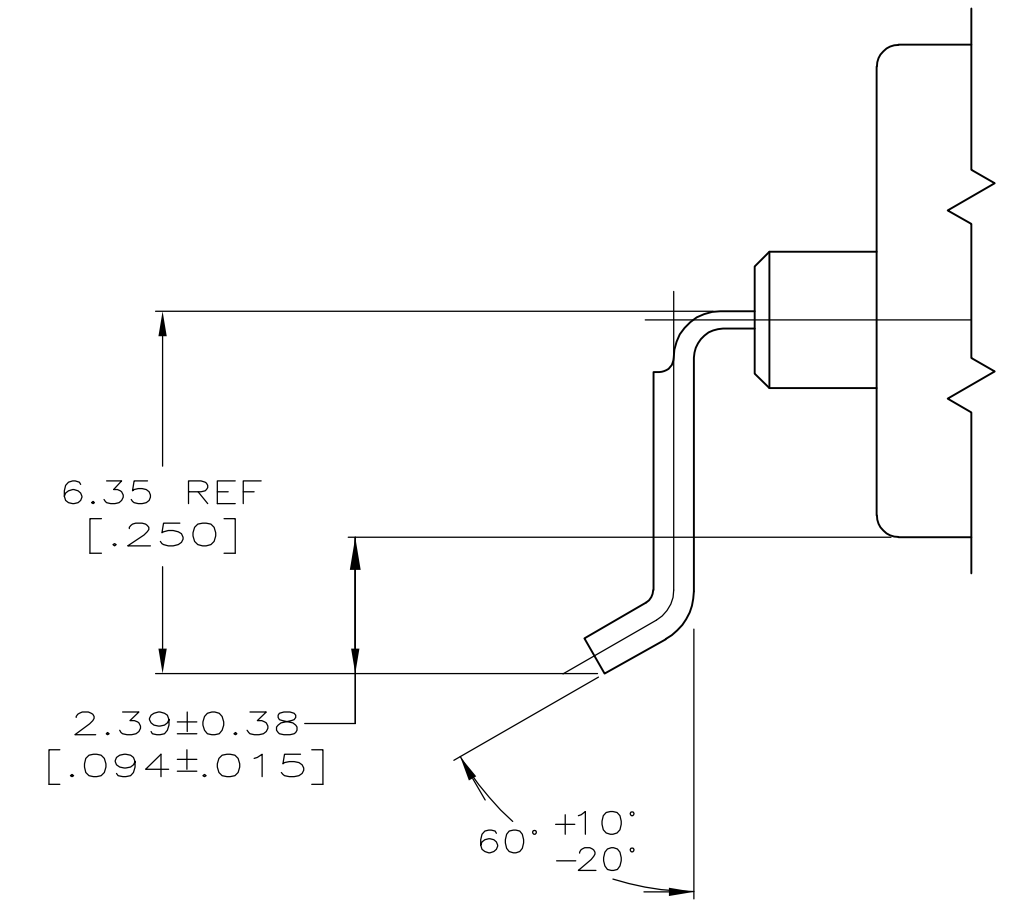

FOR 414373-3 AND 414373-4 ONLY

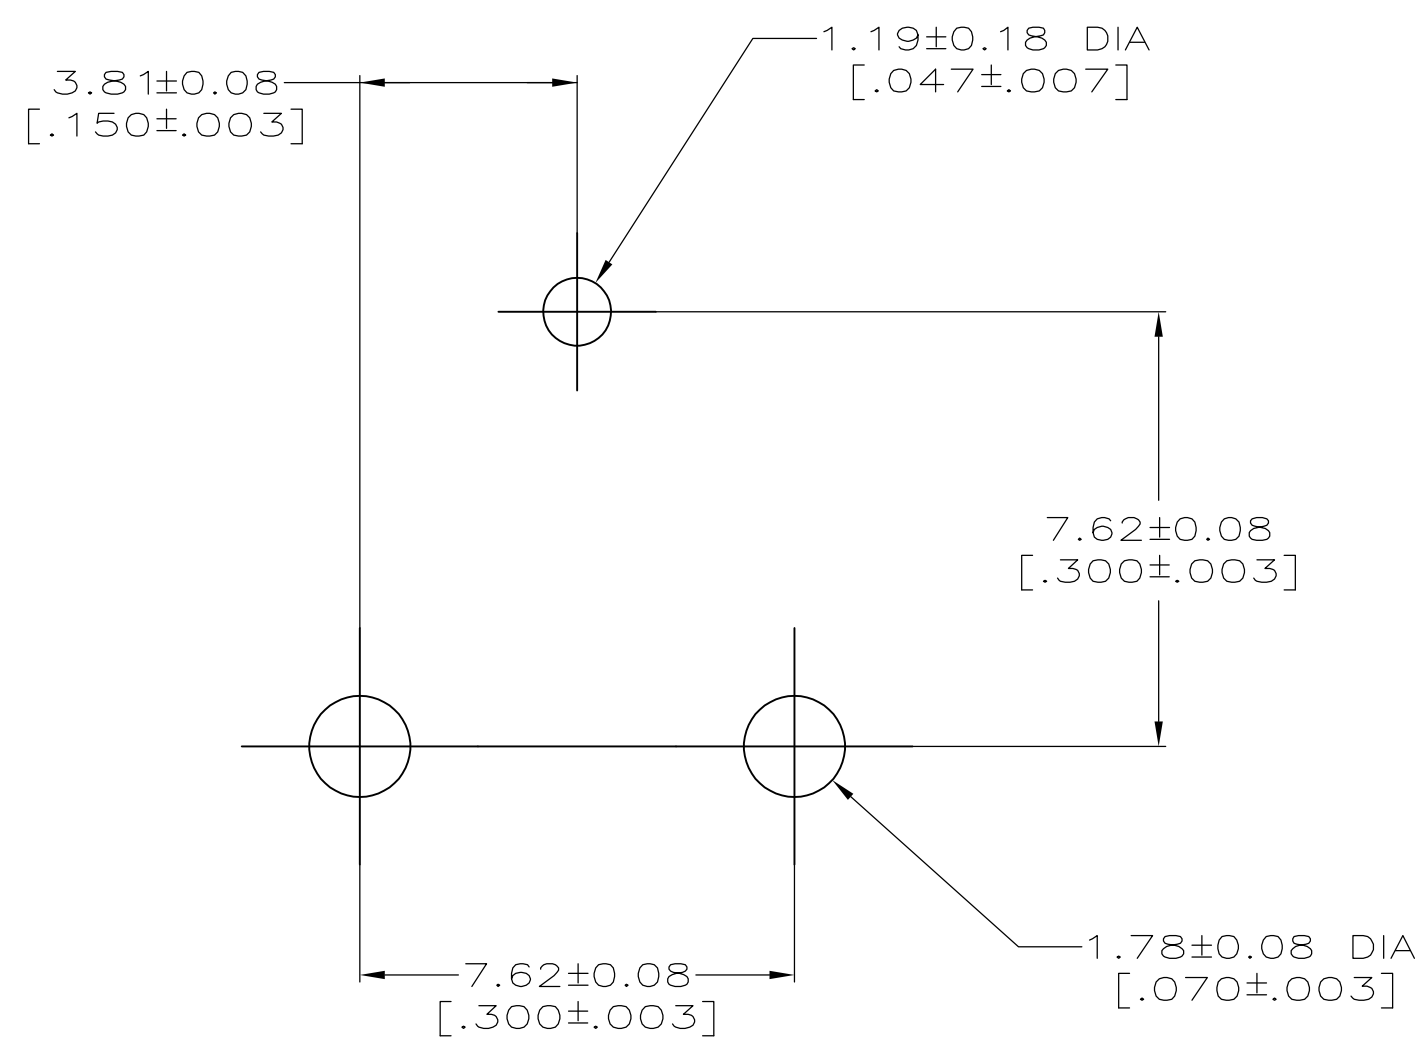

SUGGESTED PCB CONFIGURATION

OBSOLETE	⑦	①	414373-4
OBSOLETE	④	①	414373-3
OBSOLETE	④	⑥	414373-2
	④	①	414373-1
SHELL FINISH		SHELL MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. LIPPERT 05AUG92	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		CHK A. GABANY 10AUG92	NAME JACK, RIGHT ANGLE, PCB, 50 OHM, BNC	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. GABANY 10AUG92	PRODUCT SPEC 108-12078	
0 PLC	± -	APPLICATION SPEC		
1 PLC	± -	SIZE A2		
2 PLC	± 0.13 [.005]	CAGE CODE 00779		
3 PLC	± -	DRAWING NO 414373		
4 PLC	± -	RESTRICTED TO		
ANGLES	± 5°	SCALE 8:1		
MATERIAL SEE NOTES 1-3, 6	FINISH SEE NOTES 4 - 5	WEIGHT -		SHEET 1 OF 1
		CUSTOMER DRAWING		REV J1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)