
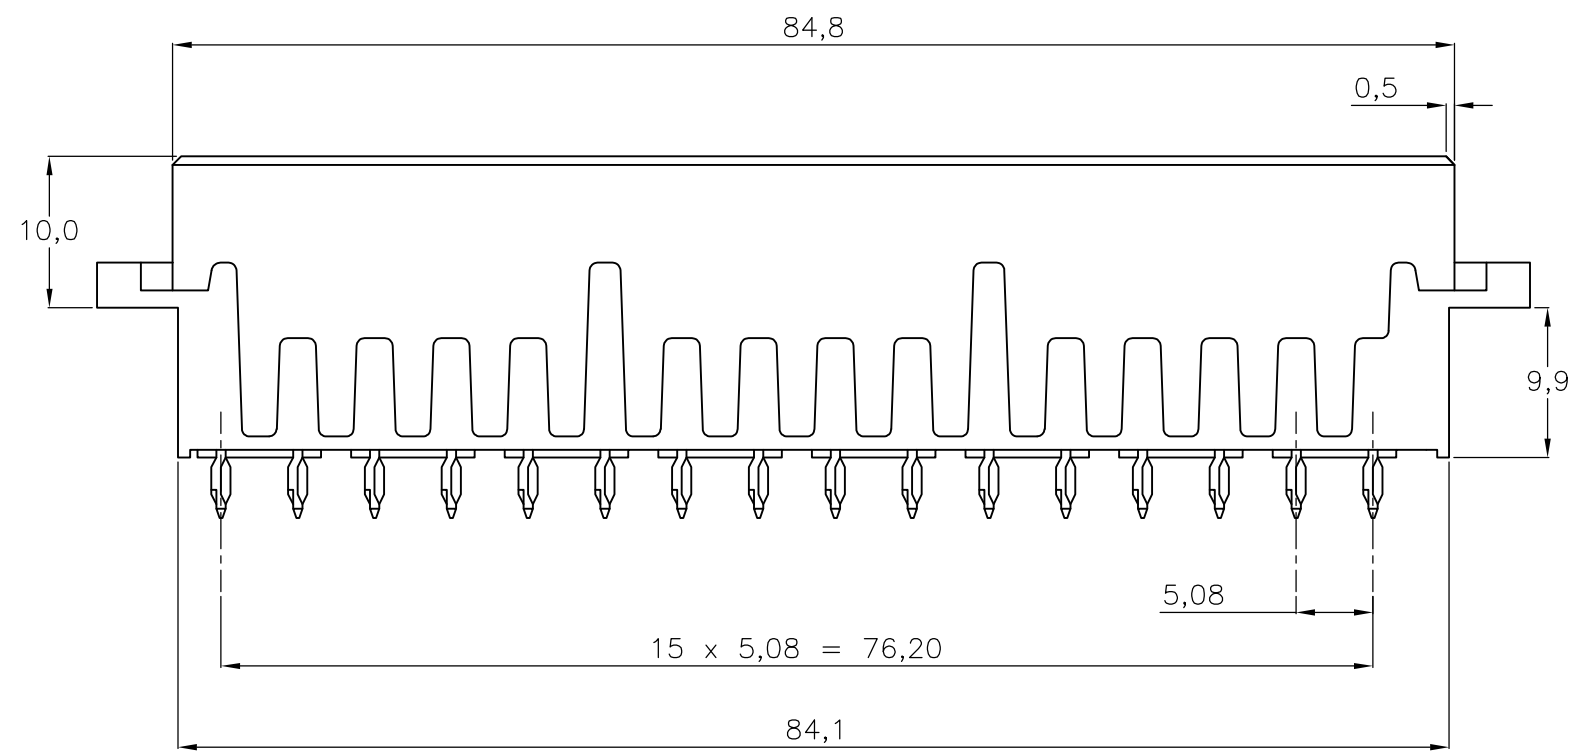
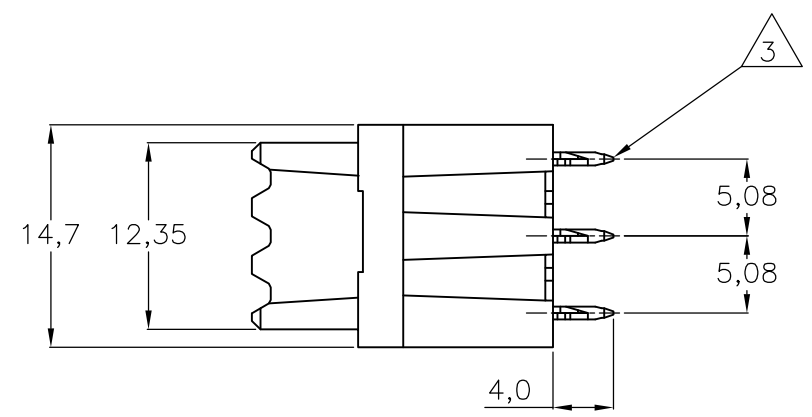


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - TE Connectivity ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	REVISED PER ECO-17-010024	13JUL2017	SY	SY

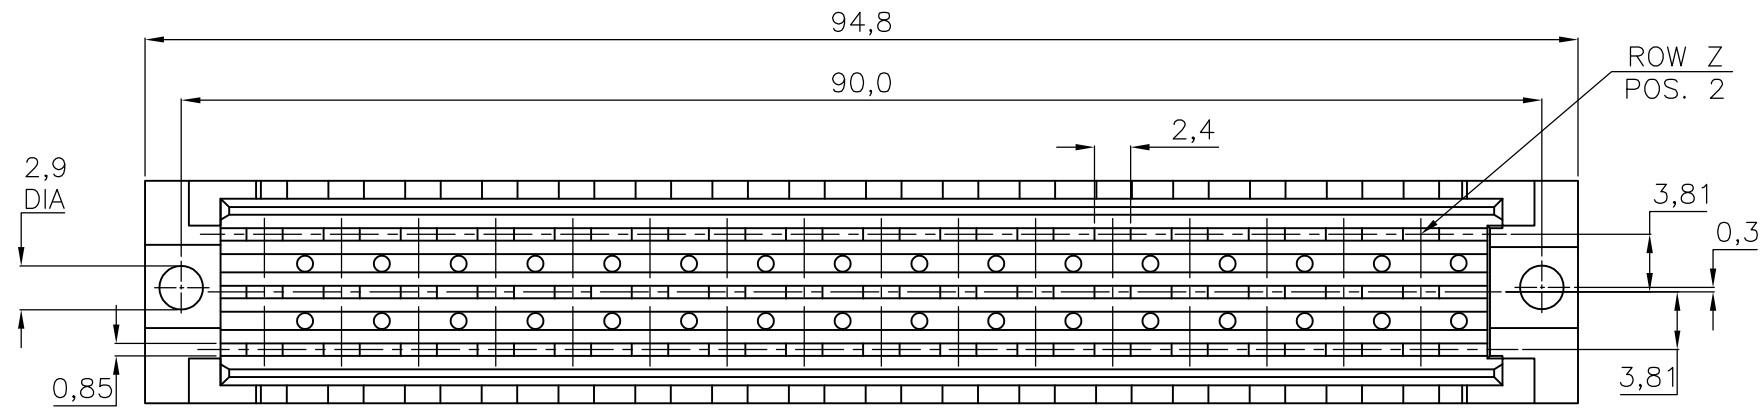

NOTES:

- 1 MATERIAL : - HOUSING : POLYESTER G.F.  
COLOUR : GREY.  
- CONTACTS : PHOSPHORBRONZE.
- 2 FINISH : -1 IEC 60603-2 PERFORMANCE LEVEL I OVER NICKEL IN CONTACT AREA, Sn OVER 1,25µm NI ON SOLDER POST.  
-4 IEC 60603-2 PERFORMANCE LEVEL II OVER NICKEL IN CONTACT AREA, Sn OVER 1,25µm NI ON SOLDER POST.  
-7 SAME AS -1 ONLY 2,0µm AU IN CONTACT AREA.  
-8 SAME AS -1 ONLY 0,4µm AU IN CONTACT AREA.
- 3 FOR P.C.B.-THICKNESS 1,6-2,4

P.C.B. HOLE DIM. ACTION PIN	
DRILLED HOLE	: 1,15 ± 0,025 mm
FIN. HOLE	: 1,015 ± 0,075 mm
AFTER REFLOW	: 1,0 ± 0,09 mm
Cu-thks	: 0,05 ± 0,025 mm
SnPb-thks	: 0,007 ± 0,003 mm
Ref TE Spec.	: 106-14018/14019

ROW	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
z	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
b	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
d	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
POS	32	30	28	26	24	22	20	18	16	14	12	10	8	6	4	2

AN ASTERISK „X” DENOTES A CONTACT.

OBSOLETE	SEE NOTE	SEE NOTE	<del>215334-8</del>
OBSOLETE	2	1	<del>215334-7</del>
			215334-4
			215334-1
	FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J.V.GRUNSVEN	21FEB86	<b>STE</b> TE Connectivity		
		CHK	M.SPOOREN	21FEB86			
DIMENSIONS: mm		APVD			NAME		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC			3 x 16 POS. TYPE F FEMALE		
0 PLC ± -		APPLICATION SPEC			B.T.B. - A.P. CONNECTOR.		
1 PLC ± -		SIZE			CAGE CODE	DRAWING NO	RESTRICTED TO
2 PLC ± -		WEIGHT			A3	00779	C-215334
3 PLC ± -		CUSTOMER DRAWING			SCALE	SHEET	REV
4 PLC ± -					NTS	1 OF 1	E
ANGLES ± -							
FINISH							

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)