




REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
C		REVISED PER ECO-17-002173	20FEB2017	SY SY

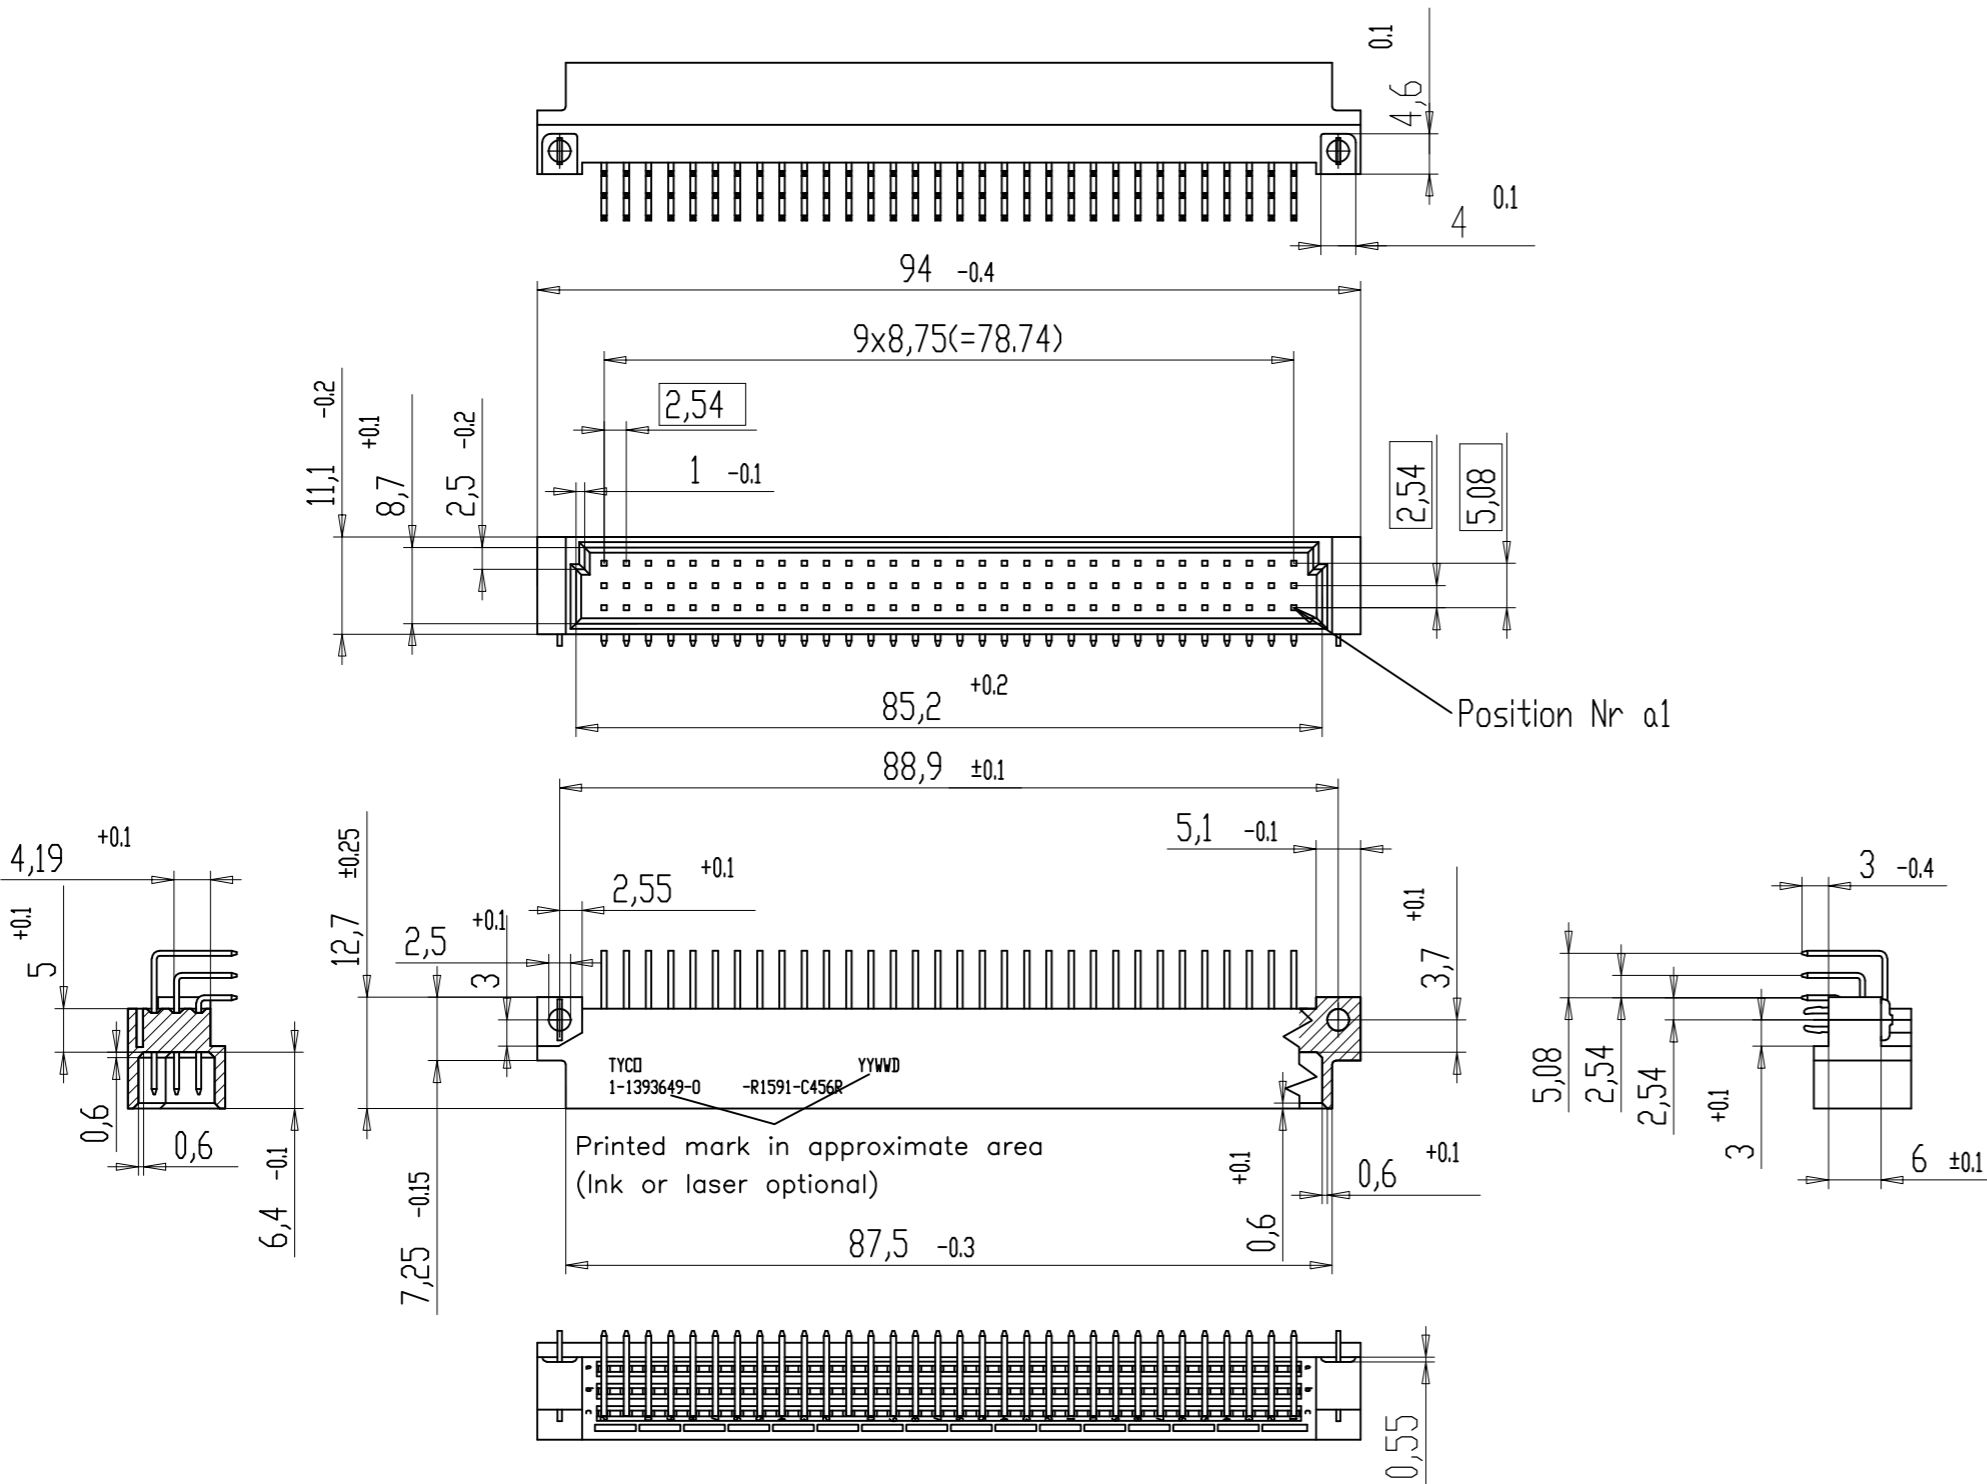

Contact lengths (5:1)

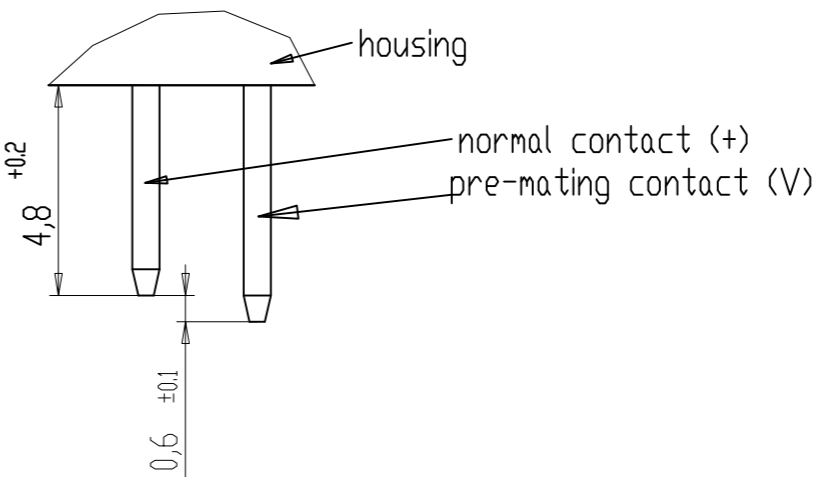

Dimensioning for mounting clips (2:1)

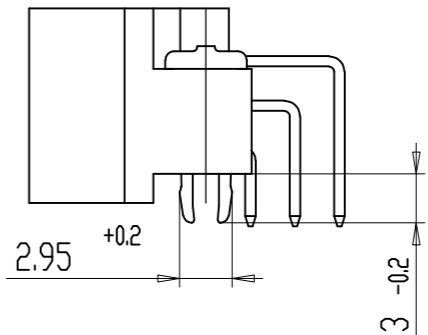


all dimensions are in mm
 Contact assignment (96 pins)

	1	2	3
Row A:	V	+	V
Row B:	+	+	+
Row C:	V	+	V

+ = normal contact
 V = pre-mating contact

Mounting holes in PCB

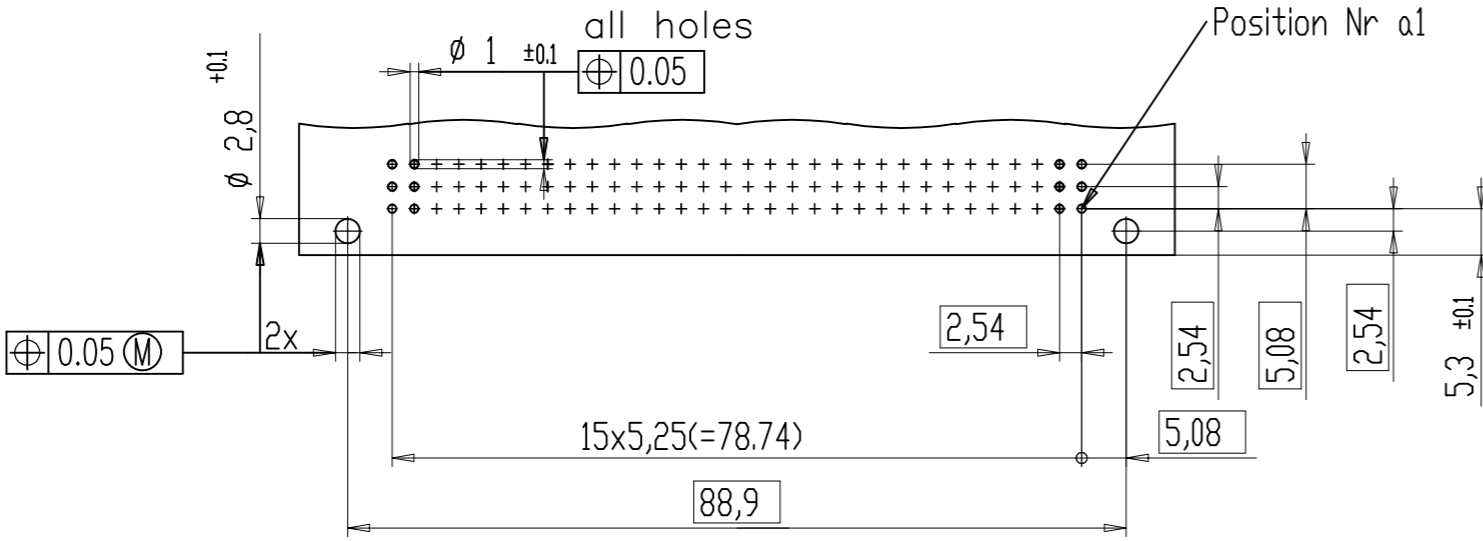

Acc to DIN EN 60603-2 performance level 2
 Housing material: PCT 30% glassfilled (UL94V-0), black
 deflection Temp. acc to ISO 75 method A(1.82 MPa) : 247°C
 Contact material: Copper alloy
 Plating : - contact area: gold
 - termination: Sn

V42254-R1591-C456R	1-1393649-0
Prod. Descr. Code	TE PN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 23AUG1999	CUVELIER	
DIMENSIONS: mm		CHK -	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD -	PRODUCT SPEC	
0 PLC ± -		APPLICATION SPEC		SIZE
1 PLC ± -		MATERIAL		CAGE CODE
2 PLC ± -		FINISH		DRAWING NO
3 PLC ± -		WEIGHT 0.000000		RESTRICTED TO
4 PLC ± -		CUSTOMER DRAWING		SCALE 1:1
ANGLES ± -		A2 00779		SHEET 1 OF 1
FINISH		C=1-1393649-0		REV C

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)