



LOC		DIST		REVISIONS			
AD	00	REV	DATE	BY	CHKD	APPD	
H1	REVISED PER	ECO-11-004587	11MAR11	RK	HMR		

△ MOLDED CIRCUIT #1 IDENTIFIER IN LOCATION SHOWN.

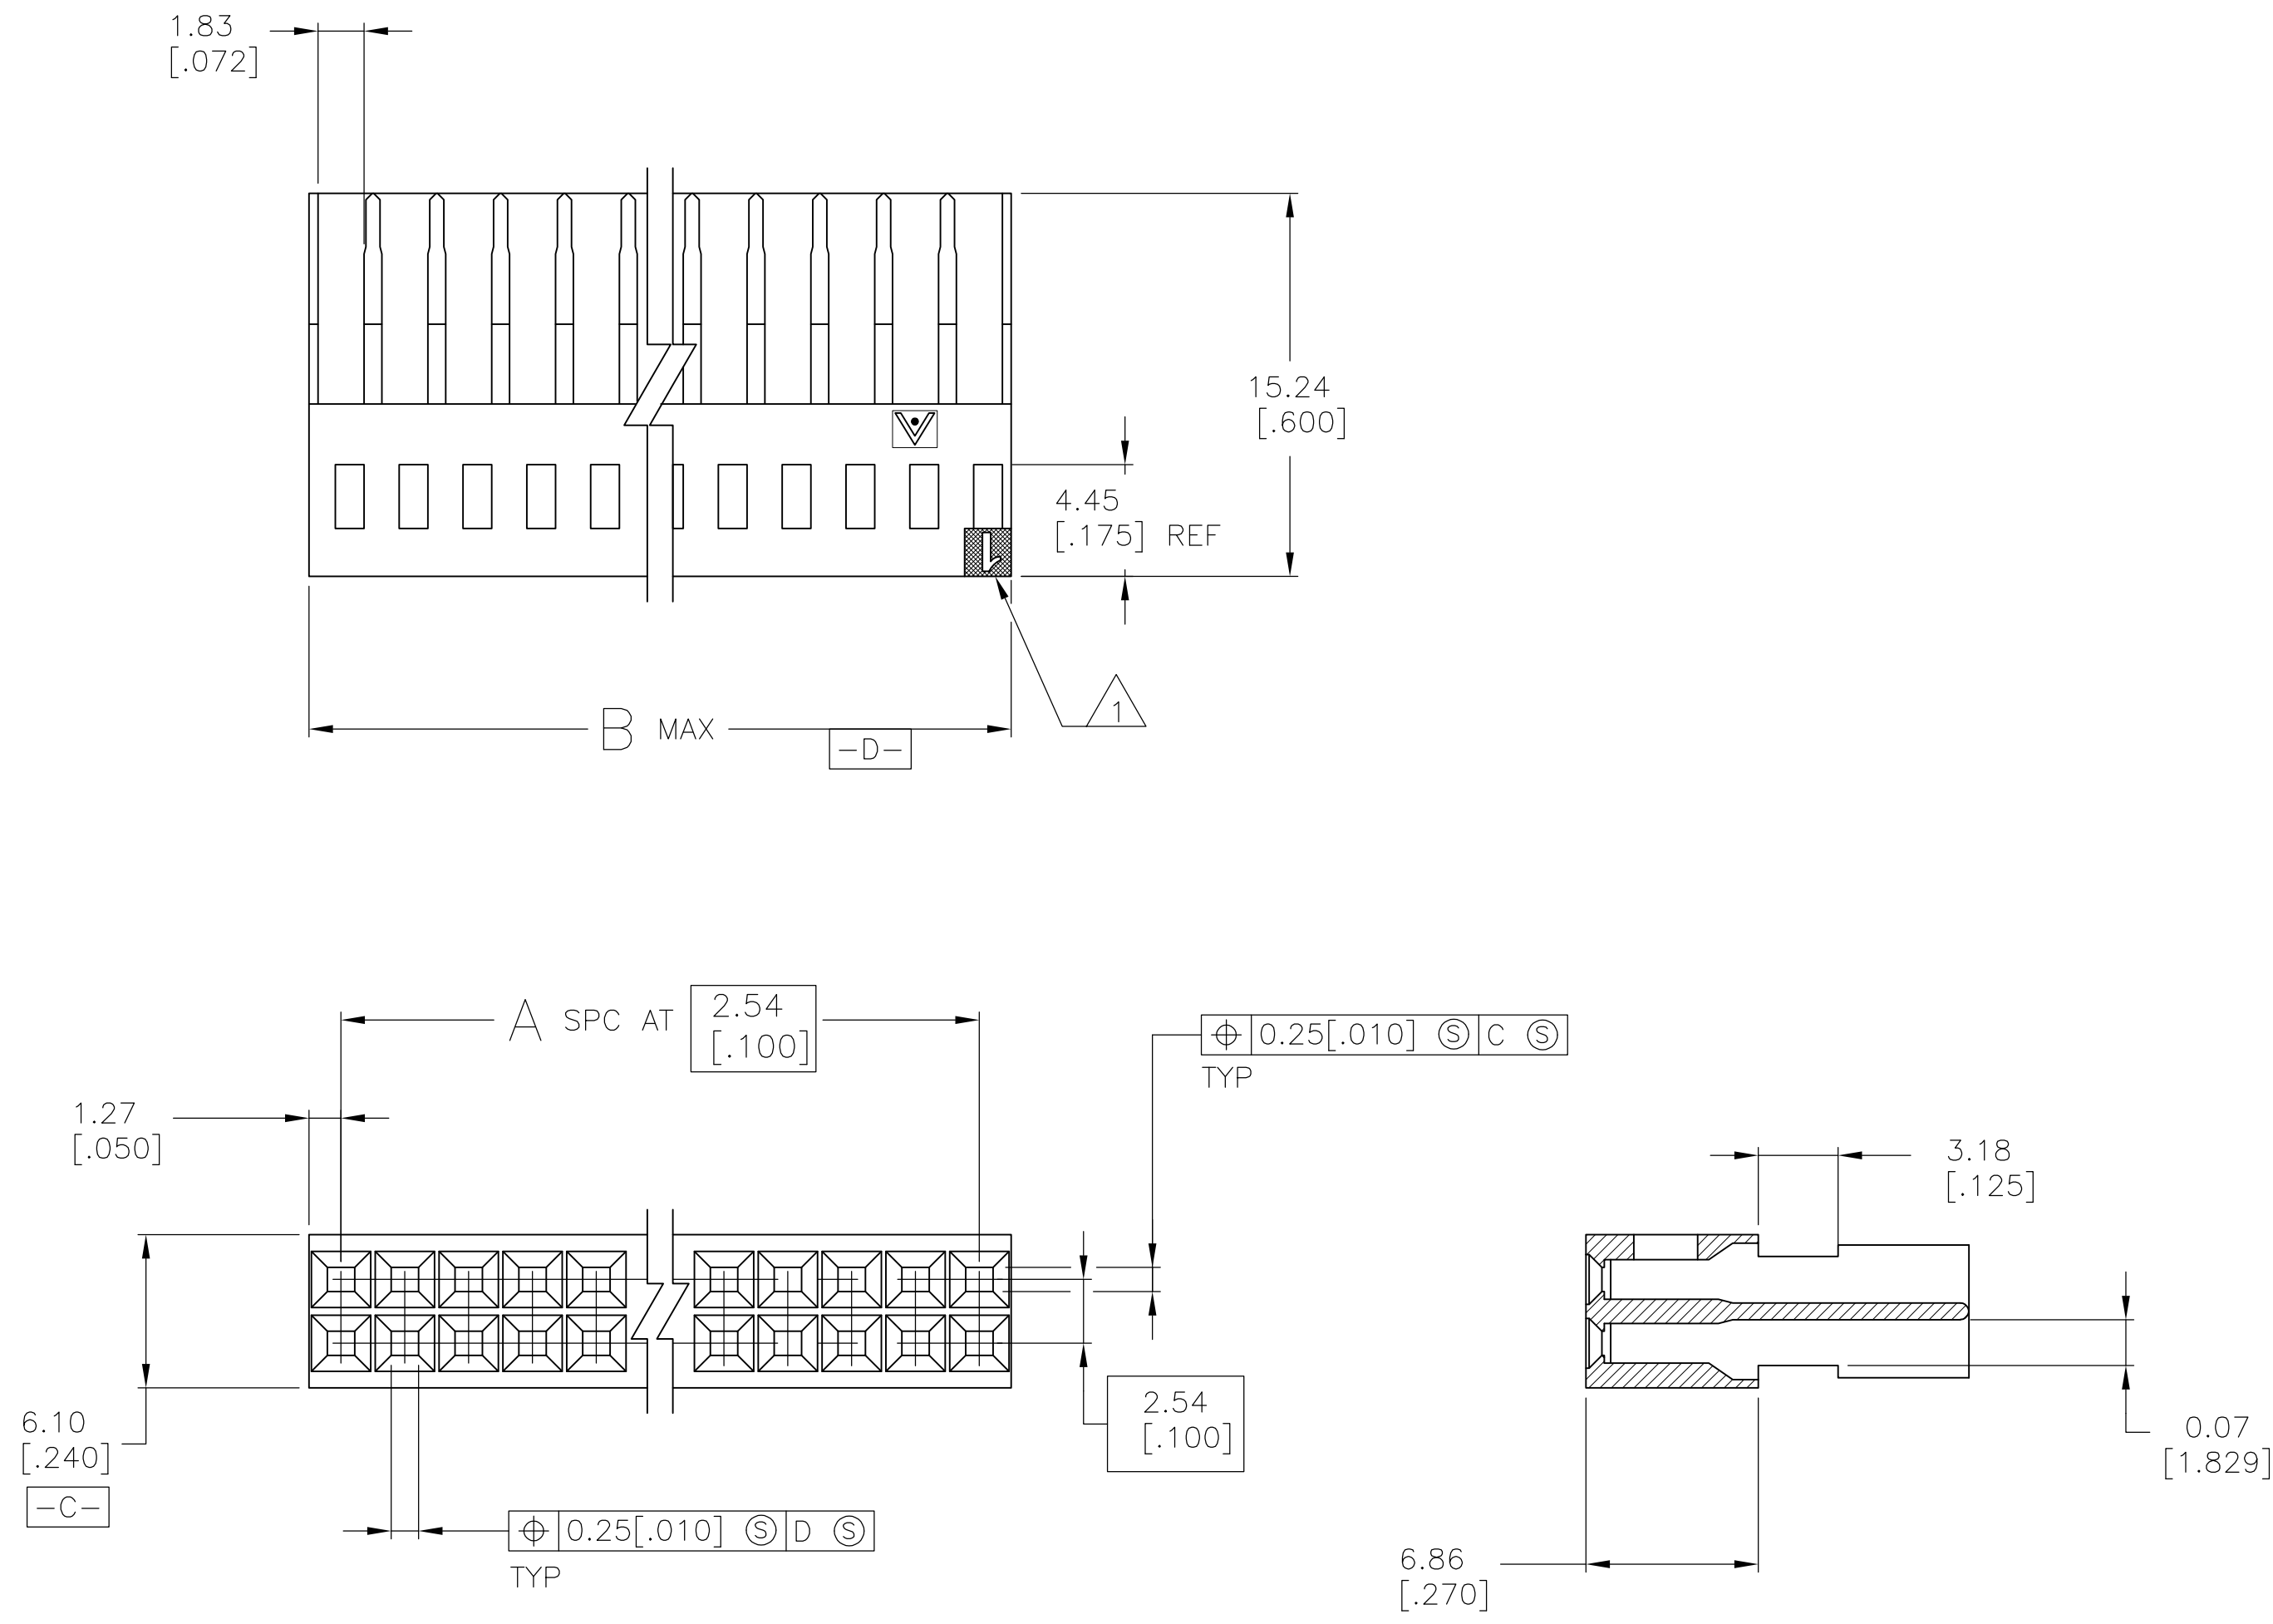

REV	DATE	BY	CHKD	APPD	PART NO.	NO. OF POSN	
81.28	[3.200]	31	64	3-102394-0			
78.74	[3.100]	30	62	2-102394-9			
76.20	[3.000]	29	60	2-102394-8			
73.66	[2.900]	28	58	2-102394-7			
71.12	[2.800]	27	56	2-102394-6			
68.58	[2.700]	26	54	2-102394-5			
66.04	[2.600]	25	52	2-102394-4			
63.50	[2.500]	24	50	2-102394-3			
60.96	[2.400]	23	48	2-102394-2			
58.42	[2.300]	22	46	2-102394-1			
OBSOLETE							
55.88	[2.200]	21	44	2-102394-0			
53.34	[2.100]	20	42	1-102394-9			
50.80	[2.000]	19	40	1-102394-8			
48.26	[1.900]	18	38	1-102394-7			
45.72	[1.800]	17	36	1-102394-6			
43.18	[1.700]	16	34	1-102394-5			
40.64	[1.600]	15	32	1-102394-4			
38.10	[1.500]	14	30	1-102394-3			
35.56	[1.400]	13	28	1-102394-2			
33.02	[1.300]	12	26	1-102394-1			
30.48	[1.200]	11	24	1-102394-0			
27.94	[1.100]	10	22	102394-9			
25.40	[1.000]	9	20	102394-8			
22.86	[0.900]	8	18	102394-7			
20.32	[0.800]	7	16	102394-6			
17.78	[0.700]	6	14	102394-5			
15.24	[0.600]	5	12	102394-4			
12.70	[0.500]	4	10	102394-3			
10.16	[0.400]	3	8	102394-2			
7.62	[0.300]	2	6	102394-1			
B	A	NO. OF POSN	PART NO.	B	A	NO. OF POSN	PART NO.

91.44	[3.600]	35	72	3-102394-4
88.90	[3.500]	34	70	3-102394-3
86.36	[3.400]	33	68	3-102394-2
83.82	[3.300]	32	66	3-102394-1



THIS DRAWING IS A CONTROLLED DOCUMENT. **STE** TE Connectivity

DIMENSIONS: mm [INCHES] TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ± -
 1 PLC ± -
 2 PLC ± 0.13[0.005]
 3 PLC ± -
 4 PLC ± -
 ANGLES ± -

MATERIAL: FLAME RETARDANT THERMOPLASTIC COLOR - BLACK
 FINISH: -

DWG: S. SHUEY 24JUL91
 CHK: M. RIDER 24JUL91
 APPD: M. RIDER 24JUL91
 NAME: HSG, DBL ROW, 2.54[.100]x2.54[.100] CL MT, AMPMODU
 APPLICATION SPEC: -
 SIZE: A1
 CAGE CODE: 00779
 DRAWING NO: 102394
 WEIGHT: -
 CUSTOMER DRAWING: -
 SCALE: 4:1
 SHEET: 1 OF 1
 REV: H1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)