


THIS SPECIFICATION SHEET FORMS A PART OF THE LATEST ISSUE OF RAYCHEM SPECIFICATION 1200.

**CONSTRUCTION DETAILS**

DIMENSIONS ARE NOMINAL VALUES IN INCHES UNLESS OTHERWISE DESIGNATED.

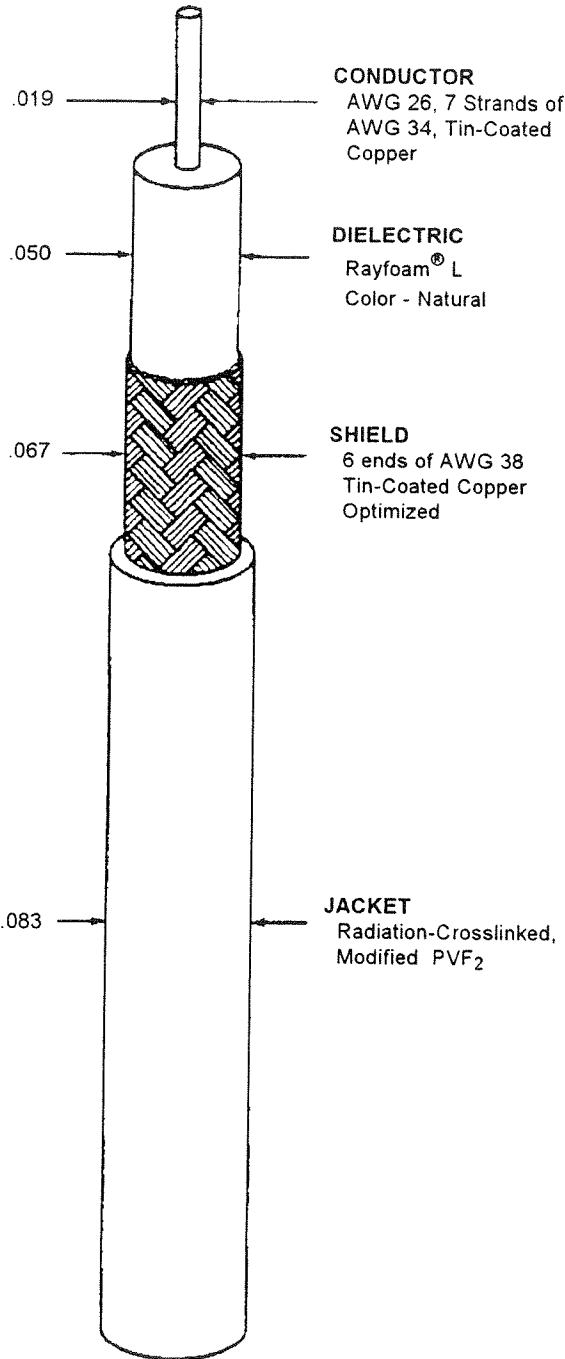

**ELECTRICAL CHARACTERISTICS**

CHARACTERISTIC IMPEDANCE	50 ± 2 ohms, Method A
CAPACITANCE	26.4 pF/ft. (nominal)
VELOCITY OF PROPAGATION	77% (nominal)
SURFACE TRANSFER IMPEDANCE	65 milliohms/meter at .1 MHz
Maximum Zt as defined by the curve from the following points	65 milliohms/meter at 1 MHz
	50 milliohms/meter at 2.4 MHz
	32 milliohms/meter at 4 MHz
	250 milliohms/meter at 20 MHz

**ADDITIONAL REQUIREMENTS**

ELECTRICAL

CONDUCTOR RESISTANCE	42.6 ohms/1000 ft. (nominal)
INSULATION RESISTANCE	10,000 megohms (minimum) for 1000 ft.
JACKET FLAWS	
SPARK TEST	1.0 kV (rms), 60 Hz
IMPULSE TEST	6.0 kV, (peak)
PARTIAL DISCHARGE (CORONA EXTINGUISH VOLTAGE)	850 volts (rms) (minimum)
VOLTAGE WITHSTAND (DIELECTRIC)	750 volts (rms) (minimum)

ENVIRONMENTAL

AGING STABILITY	135°C/-55°C/2.25 inch mandrel
FLAMMABILITY	Method C
HEAT SHOCK	225°C
LOW TEMPERATURE-COLD BEND	-55°C/2.25 inch mandrel
VOLTAGE WITHSTAND (POST ENVIRONMENTAL)	1000 volts (rms), 1 minute

PHYSICAL

INSULATION (DIELECTRIC)	
ELONGATION	50% (minimum)
TENSILE STRENGTH	900 lbf/in <sup>2</sup> (minimum)
JACKET	
ELONGATION	200% (minimum)
TENSILE STRENGTH	4000 lbf/in <sup>2</sup> (minimum)
JACKET THICKNESS	.008 inch (nominal)

WEIGHT 5.9 lbs/1000 ft. (nominal)

Outer jacket color will be white (designated by a "-9" appended to the part number, e.g., 5026E1111-9) unless otherwise specified.

Designate outer jacket color with a dash number in accordance with MIL-STD-681.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)