
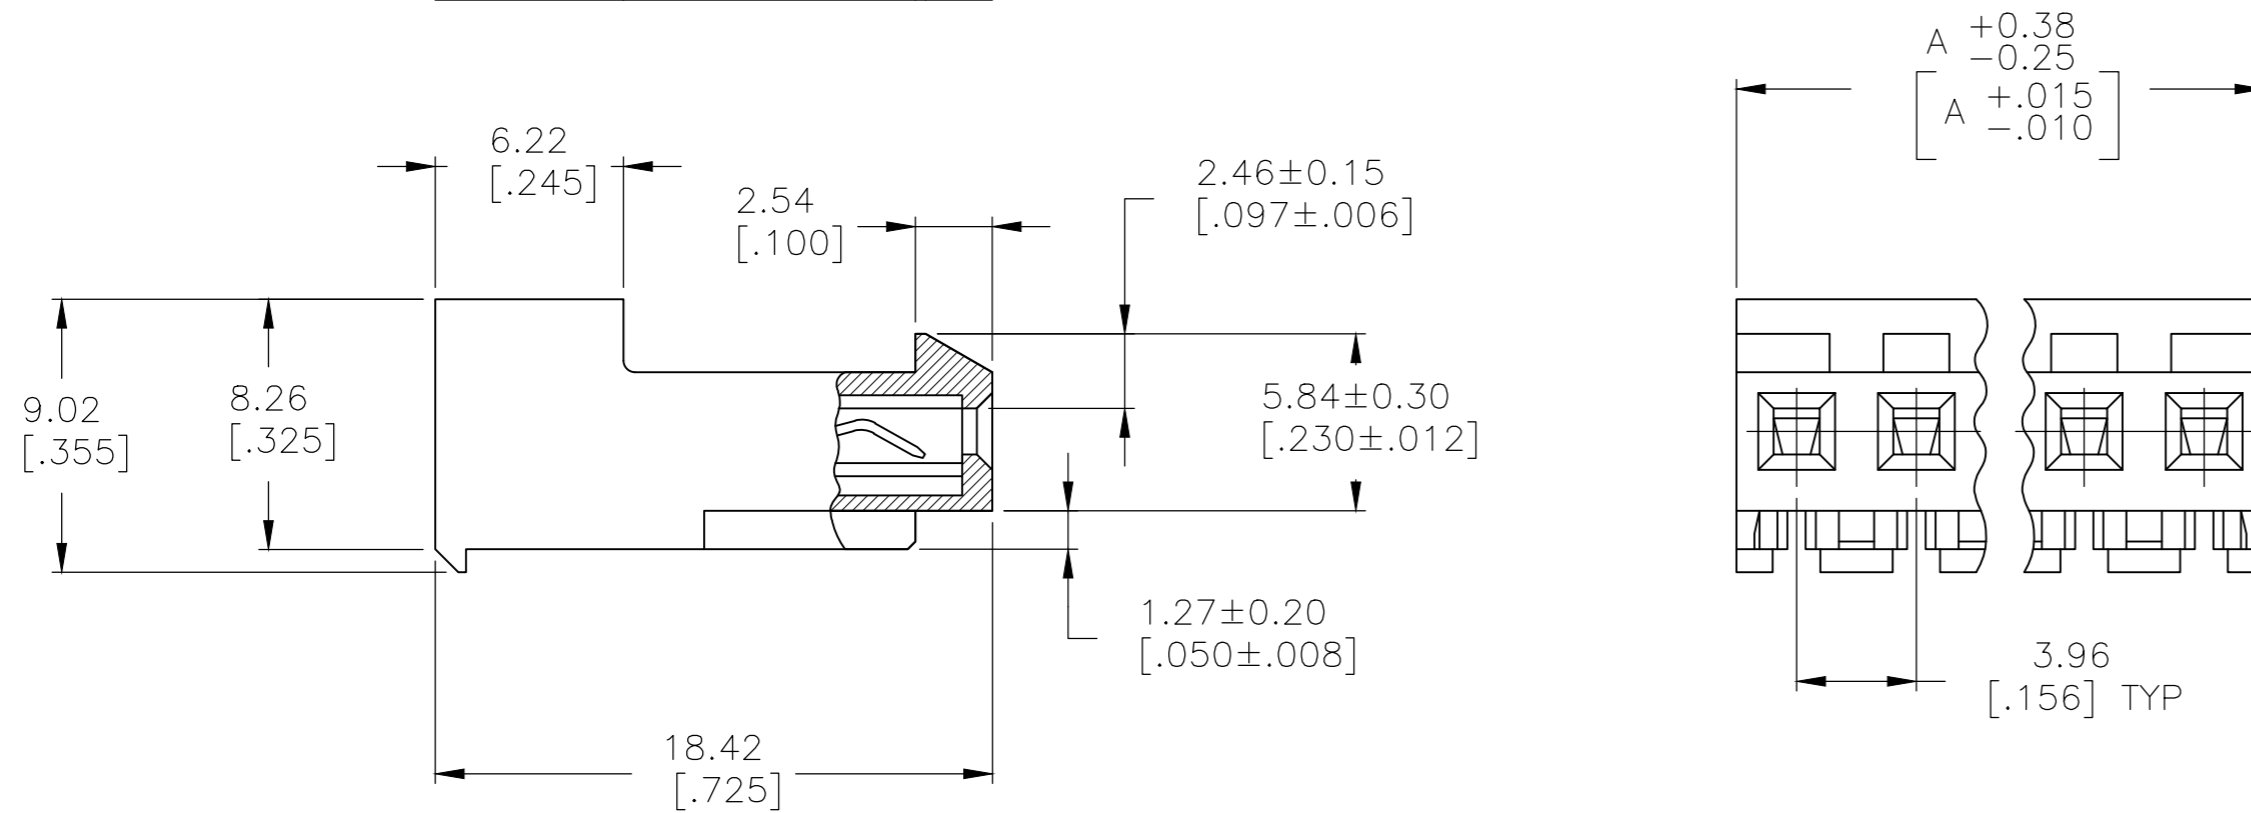


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
C2		REVISED PER ECR-17-018174	10MAY2018	BDA SG

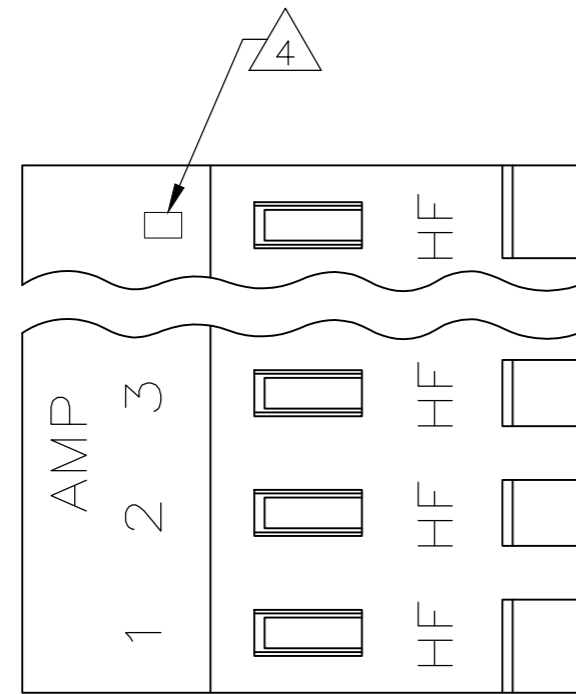

1 MATERIAL: CONNECTOR - NYLON UL94V-2 (RED).  
 CONTACTS - 0.30[.012] THICK COPPER ALLOY BRIGHT TIN-LEAD  
 0.00203[.000080] MIN THICK FOR -2 THRU -28  
 - 0.30[.012] THICK COPPER ALLOY MATTE WHISKER  
 MITIGATED TIN 0.00203[.000080] MIN THICKNESS  
 OVER NICKEL UNDERPLATE FOR -32 THRU -58.

2. CONTACTS ACCEPT 22 AWG WIRE WITH 2.41[.095] MAX INSULATION DIAMETER.  
 3. CONTACTS MUST ACCEPT 1.14±0.03[.045±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.

4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.

5. DIMENSIONS IN BRACKETS ARE IN INCHES.

6. HOUSING FEATURES ARE: CLOSED END WITH LOCKING RAMP.(HIGH FORCE CONTACT)

7 OBSOLETE PARTS

FINISH	DIM A	NO. OF CIRCUITS	PART NO.
TIN	23.77 [.936]	6	3-643193-6
TIN	19.81 [.780]	5	3-643193-5
TIN	15.85 [.624]	4	3-643193-4
TIN	11.89 [.468]	3	3-643193-3
TIN	7.92 [.312]	2	3-643193-2

FINISH	DIM A	NO. OF CIRCUITS	PART NO.
TIN-LEAD	23.77 [.936]	6	<del>3-643193-6</del>
TIN-LEAD	19.81 [.780]	5	<del>3-643193-5</del>
TIN-LEAD	15.85 [.624]	4	<del>3-643193-4</del>
TIN-LEAD	11.89 [.468]	3	<del>3-643193-3</del>
TIN-LEAD	7.92 [.312]	2	<del>3-643193-2</del>

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	12FEB91		MTA 156 CONNECTOR ASSEMBLY, 22 AWG, HIGH FORCE,SPECIAL
CHK	12FEB91		
APVD	20FEB91		
PRODUCT SPEC	108-1051		
MATERIAL	1	APPLICATION SPEC	114-1020
FINISH	1	WEIGHT	-
CUSTOMER DRAWING		SCALE	4:1

SIZE: A2 CAGE CODE: 00779 DRAWING NO: 643193 SHEET: 1 OF 1 REV: C2

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)