
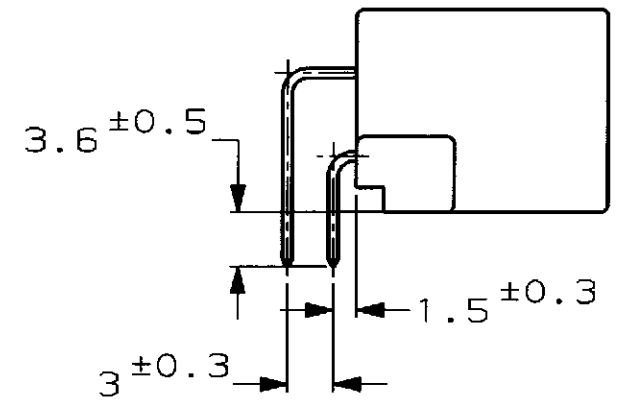
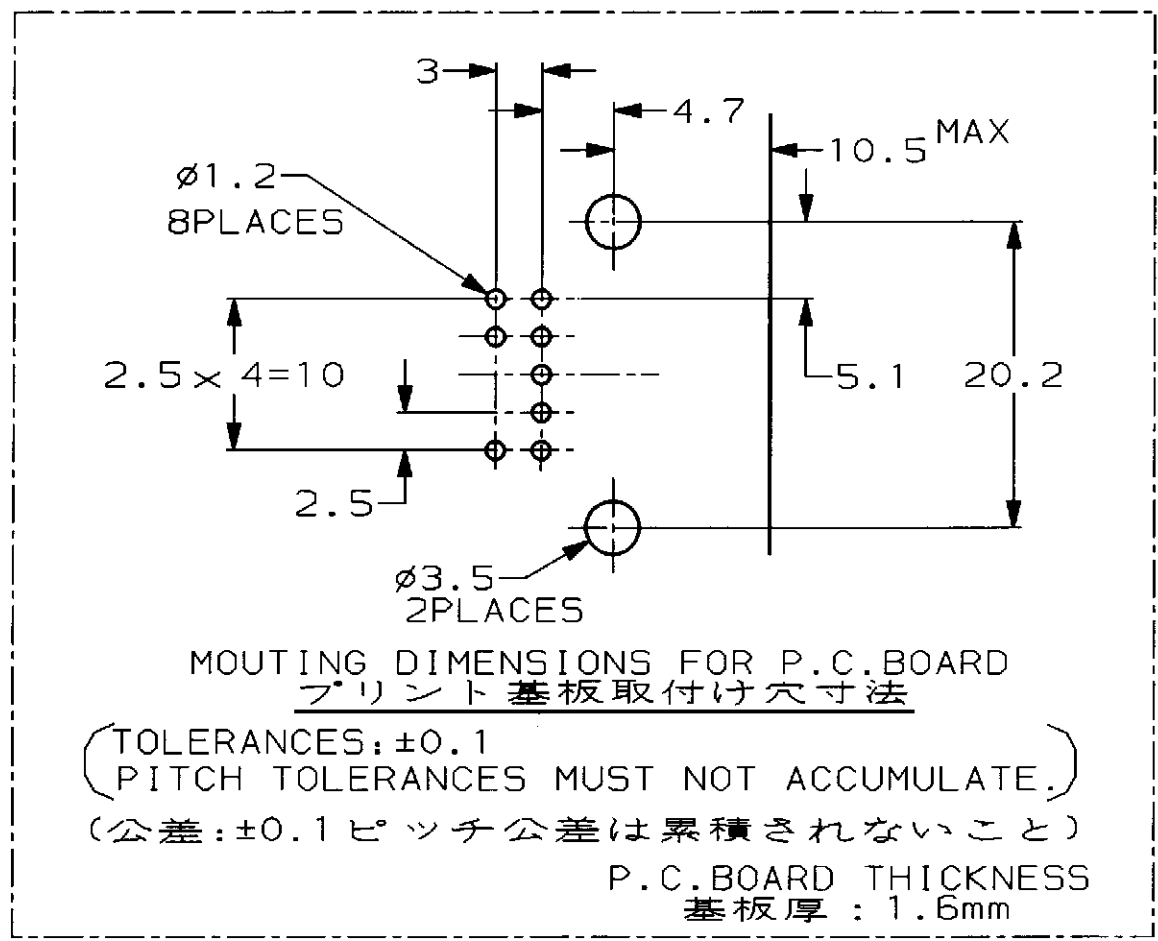
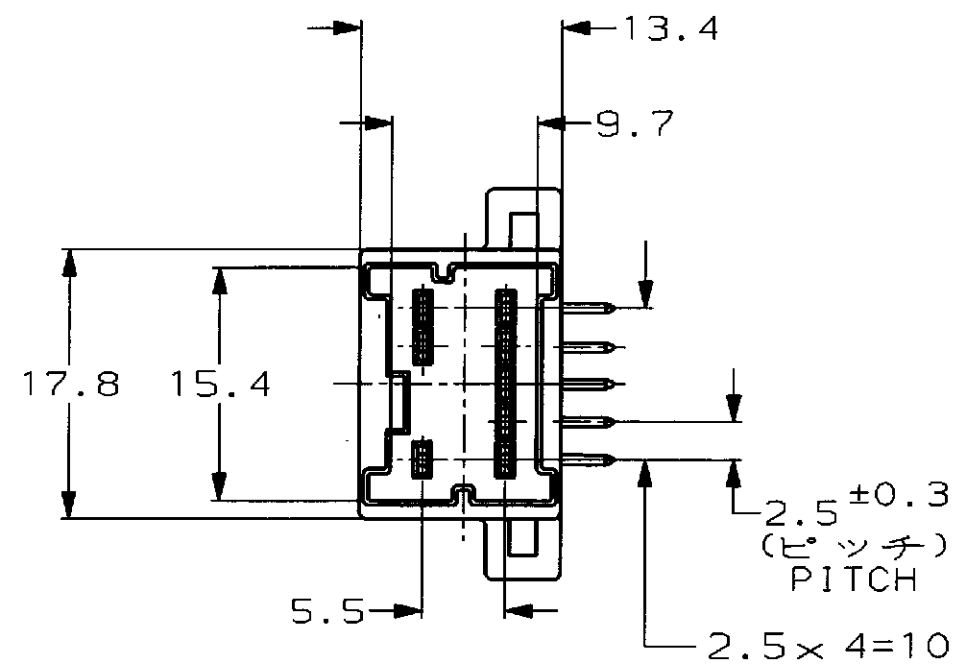


LOC DIST J

REVISIONS 変更

| P | LTR | DESCRIPTION | ECN | DATE | DWN | APVD |
|---|-----|-------------|--------------|-----------|-----|------|
| A | | 再作成 REDRAWN | FJ00-0506-98 | 18 APR 98 | | |

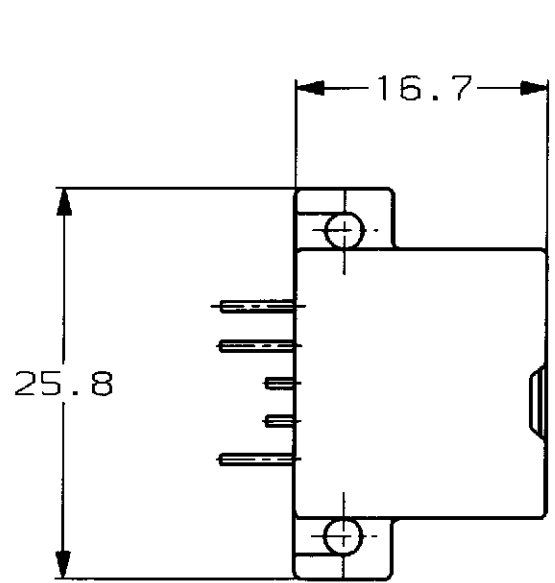

- 1 RECOMMENDED MOUNTING SCREW: PAN-HEADED, TYPE 2 TAPPING SCREW OF 3 DIA X 6 LENGTH (JIS B1115, B1122), TIGHTENING TORQUE: 39.2Nm [4Kg-cm] MAX
- 1 推奨取付ネジ: JIS B1115, B1122タッピングねじ, なべ2種, 呼び径3, 長さ6, 締付トルク: 39.2N-cm [4Kg-cm] 以下

| | |
|---------------|----------------|
| 自然色 (NATURAL) | 1123451-1 |
| 色 (COLOR) | 型番 PART NUMBER |

| | | | |
|---|--|--|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION. | | AMP 株式会社 Kawasaki, Japan | |
| DIMENSIONS: 単位: 寸 mm | TOLERANCES UNLESS OTHERWISE SPECIFIED | NAME 040III MULTILOCK CONNECTOR 8POS CAP HOUSING ASSEMBLY WIRE TO BOARD (H) TYPE | PRODUCT SPEC 108-5603 |
| | 一般公差: 10% ±0.2, 30% ±0.25, 50% ±0.3, 100% ±0.3, ANGLE: ±0.3° | APPLICATION SPEC 取付適用規格 | SIZE CAGE CODE DRAWING NO. RESTRICTED TO |
| MATERIAL 材料 PBT | FINISH 仕上 | WEIGHT 3.1g | A3 00779 1123451 |
| | | CUSTOMER DRAWING | SCALE 2:1 SHEET 1 OF 1 REV A |

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)