
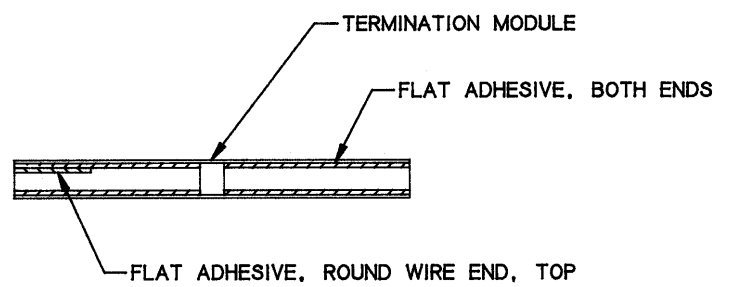
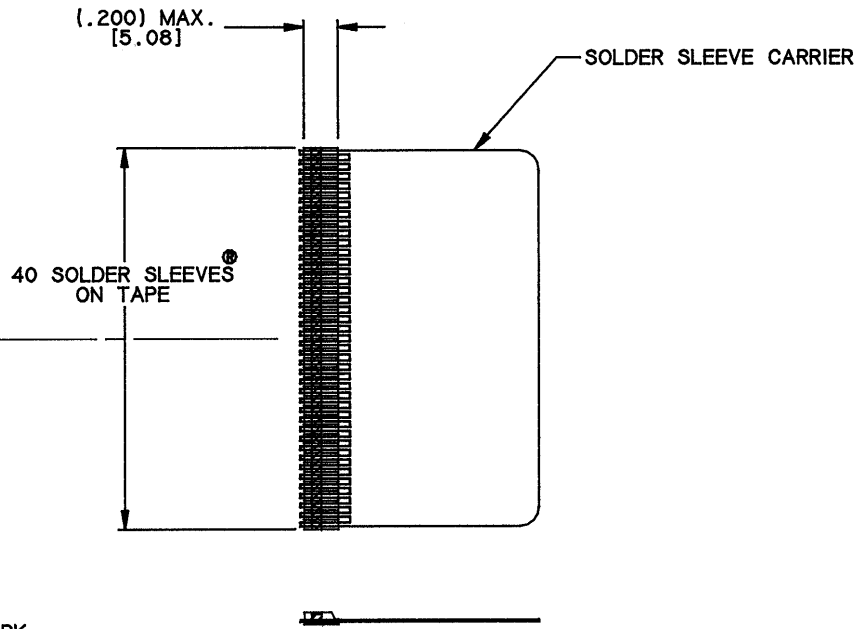


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
N/C	INITIAL RELEASE PER ECN T-15778	91FEB19	AN
A	REVISED PER ECN T-16116	4-24-91	AN

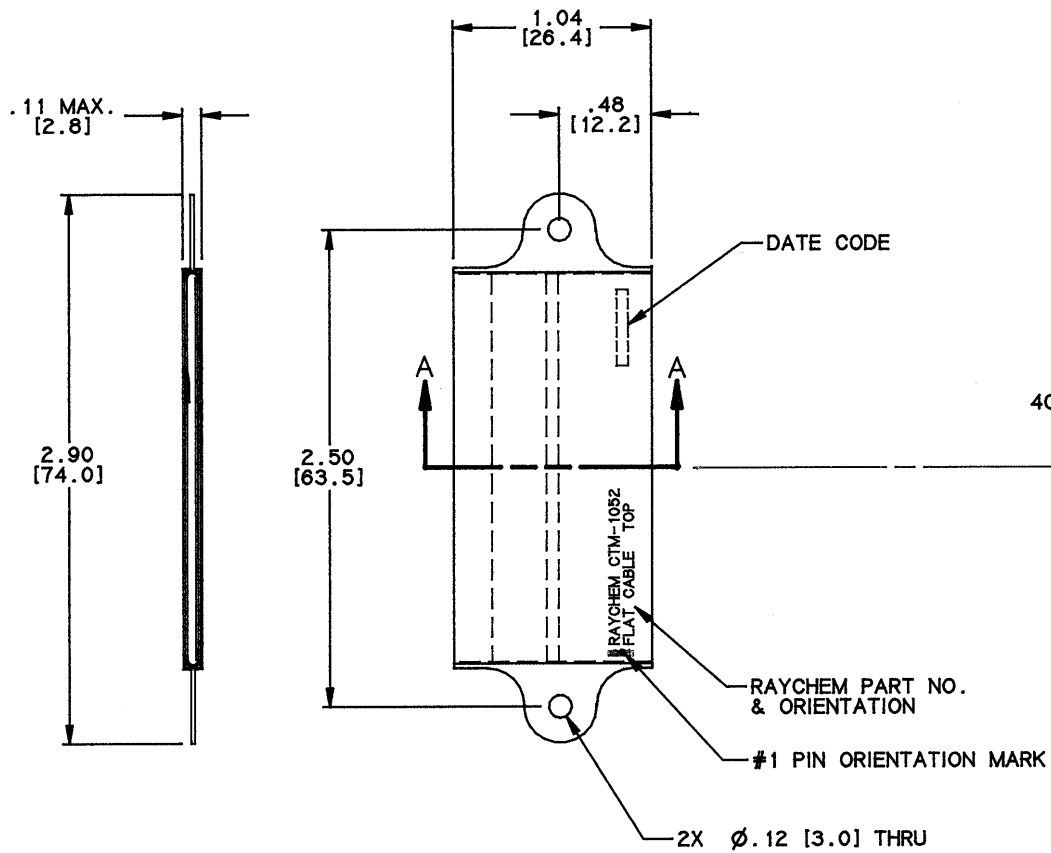

SECTION A-A

SCALE: 4X If this document is printed it becomes uncontrolled. Check with the web for latest revision.

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL:
 - A) TERMINATION MODULE: TRANSPARENT BLUE HEAT SHRINKABLE, RADIATION CROSS-LINKED PVF₂.
 - B) FLAT ADHESIVE: MODIFIED THERMOPLASTIC HOT MELT SEALANT.
 - C) SOLDER SLEEVES: TRANSPARENT BLUE HEAT SHRINKABLE, RADIATION CROSS-LINKED PVF₂ (SEE RAYCHEM DWG NO. D-141-0226)
SOLDER Sn96Ag04 WITH RMA FLUX PER QQ-S-571.
- USABLE WIRE SIZE: ROUND WIRE: 24 AWG, FLAT CONDUCTOR CABLE: 28 GA.
- DIELECTRIC WITHSTANDING VOLTAGE:

TEXT CONDITION	TEXT VOLTAGE VAC RMS AT 60HZ
SEA LEVEL	750
ALTITUDE 70,000 FT (33.5 TORR) AMBIENT TEMP	500
ALTITUDE 80,000 FT (20.6 TORR) -50°C TEMP	375

4. CURRENT RATING: 1.5 AMPS PER CONDUCTOR.

SPECIFICATION CONTROL DRAWING © Raychem Corporation 1988

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN BRACKETS. DECIMALS .XXX ± .005 [.13mm] .XX ± .03 [.8 mm] ANGLES .X ±	DRAWN	MGHOBSON	91JAN18	Raychem RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025			
	CHECKED	AN	91FEB19				
	APPROVED	EAC	91FEB19	TITLE CABLE TRANSITION MODULE (CTM), FLAT-TO-ROUND TERMINATION, 40 CONDUCTOR, 2 IN. W/EARS, .050 PITCH, ENVIRONMENT RESISTANT, 125° MAX OPERATING TEMPERATURE			
	APPROVED						
WEIGHT	CAD NAME		007949-1	SIZE	CODE IDENT. NO.	DWG. NO.	REV
lbs [g]	THIRD ANGLE PROJECTION			C	06090	CTM-1052	A
				DO NOT SCALE THIS DRAWING		SHEET 1 OF 1	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)