


REV. 0

DCO 142960

TOL ± .010 UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C	
RESISTANCE	1350 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.1 VDC MAX., 1.5 VDC MIN.

CUSTOMER DATA SHEET

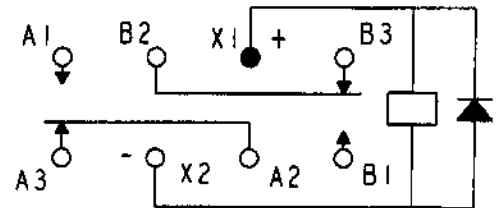

TERMINAL VIEW

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

CONTACT RATING:	LOW LEVEL TO
	2 AMPS 28 VDC RESISTIVE
	50,000 OPERATIONS

NOTES:	OPERATE 4 MS MAX.
	RELEASE 6 MS MAX.
	CONTACT BOUNCE 1.5 MS MAX.

DR. B.D. 5/31/01 CK. TLG 5-31-01



CUST. OPL
CUST. NO. M39016/37-026L REV.

"3SBC" RELAY

3SBC1626A2

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)