

**THERMOFIT • SPECIFICATION CONTROL DRAWING • MOLDED PARTS**

1. All dimensions are in inches; all angles are in degrees.  
 2. Dimensions appearing in table below are as follows:  
 a - As supplied      b - After unrestricted recovery  
 3. Weight shown in table of dimensions is based on polyolefin part.  
 4. Molding ports are optional. When specified, they will be located as shown. Order 381A115-3-00 when molding ports are required.


If this document is printed it becomes uncontrolled.  
 Check for the latest revision.

NOTES

ORDERING INFORMATION

Matl. No.	Description	Rayclad Matl. Spec.	Specific Grav. Max.
3	Polyolefin	RT 301	1.40
4	Flex poly	RT 1304	1.40
5	Neoprene	RT 501	1.50
6	Silicone, flame retarded	RT 602	1.35
12	Viton	RT 1312	1.95
25	Elastomer, fluid resistant	RT 1325	

Add material number as suffix to part number;  
 Example - Order 381A115-3 when polyolefin is required.

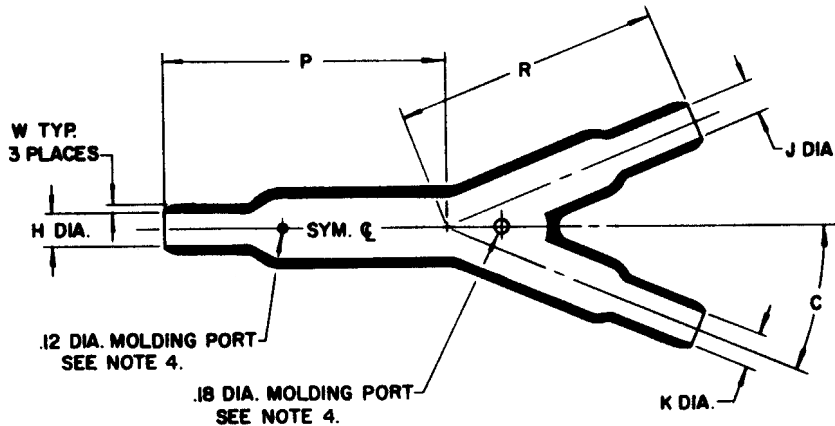

**TABLE OF DIMENSIONS**

PART NO.	H		J and K		P		R		HW		JW and KW		C		Weight lbs ±10%
	Min a	Max b	Min a	Max b	Max a	±10% b	Max a	±10% b	a	±20% b	a	±20% b	±10° a	±5° b	
381A115-	1.12	.49	1.06	.49	—	3.44	—	3.45	—	.10	—	.10	10	22-1/2	.135

**Raychem**

E.O. REV DATE DESCRIPTION

DRN DD  
 CHK'D KT  
 AUTH RW  
 AUTH HP

PART DESCRIPTION  
 TRANSITION, Y

PART NO.  
**381A115**

REV LTR  
**D**

DATE  
 May 31, 1984

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)