


- ▲ ZINC PER QQ-2-363
- ▲ PTFE PER MIL-P-19468
- ▲ BERYLLIUM COPPER PER QQ-C-530
- ▲ COPPER NICKEL ALLOY PER ASTM-B-122
- ▲ STAINLESS STEEL PER ASTM-A-582
- ▲ BRASS PER QQ-B-626
- ▲ NICKEL PLATE PER QQ-N-290, .000200 MINIMUM THICKNESS
- ▲ GOLD PLATE PER MIL-G-45204, .000030 - .0000055 MINIMUM THICKNESS
- ▲ PASSIVATE PER QQ-P-35
- ▲ TIN PLATE PER ASTM-B-545, .000100 - .000200 MINIMUM THICKNESS
- ▲ PREPARE BOARD AND TERMINATE PER APPLICATION SPEC 114-12001
- 1.2. SEE INSTRUCTION SHEET 9194.
- ▲ GOLD PLATE PER MIL-G-45204.

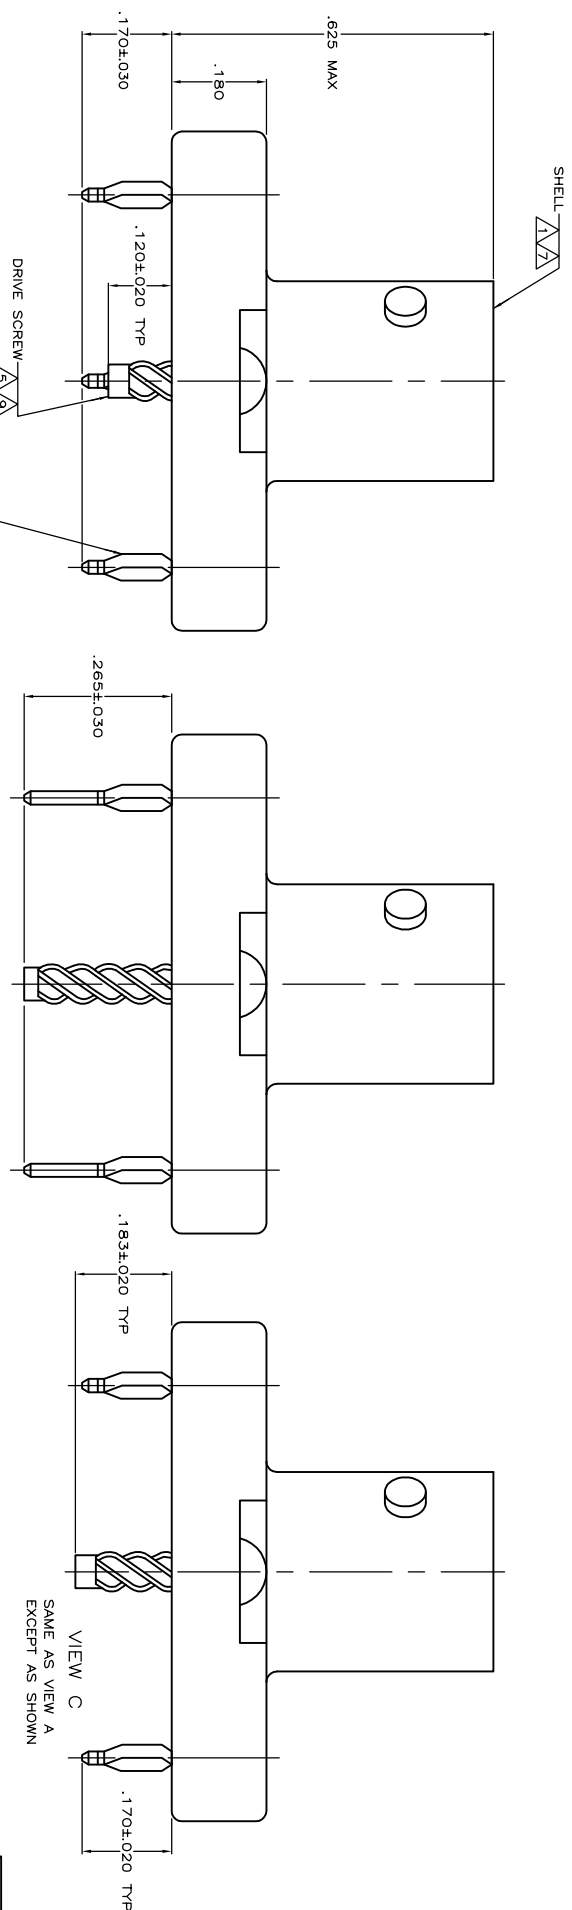

VIEW A  
 SAME AS VIEW A EXCEPT AS SHOWN  
 VIEW B  
 SAME AS VIEW A EXCEPT AS SHOWN  
 VIEW C  
 SAME AS VIEW A EXCEPT AS SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DATE	10/8-12/10	REV	1
BY	7/31/08	DESIGNED BY	E. BILU
CHECKED BY	7/31/08	APPROVED BY	7/31/08
DATE	10/8-12/10	REV	1
BY	7/31/08	DESIGNED BY	E. BILU
CHECKED BY	7/31/08	APPROVED BY	7/31/08
DATE	10/8-12/10	REV	1
BY	7/31/08	DESIGNED BY	E. BILU
CHECKED BY	7/31/08	APPROVED BY	7/31/08
DATE	10/8-12/10	REV	1
BY	7/31/08	DESIGNED BY	E. BILU
CHECKED BY	7/31/08	APPROVED BY	7/31/08

DATE	10/8-12/10	REV	1
BY	7/31/08	DESIGNED BY	E. BILU
CHECKED BY	7/31/08	APPROVED BY	7/31/08
DATE	10/8-12/10	REV	1
BY	7/31/08	DESIGNED BY	E. BILU
CHECKED BY	7/31/08	APPROVED BY	7/31/08

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)