
SPECIFICATION CONTROL DRAWING

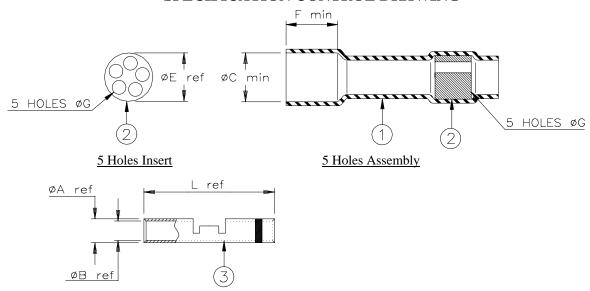

| | _ | Product Dimensions | | | | | <u>.</u> | | | <u>.</u> | |
|------------------|---|--------------------|---------|---------|---------|-------|----------|---------|---------|----------|---------|
| Product Revision | | Crimp | L | A | В | CMA | Stripe | øС | øG | Е | F |
| Product Name | | Splice | ref | ref | ref | Range | Color | min | min | ref | min |
| D-436-0148 | Α | D-609-06 | 12.7 | 1.95 | 1.20 | 300- | Red | | | | |
| | | | (0.500) | (0.077) | (0.047) | 1510 | | | | | |
| D-436-0149 | Α | D-609-07 | 14.6 | 2.65 | 1.65 | 779- | Blue | 7.60 | 2.00 | 7.50 | 8.90 |
| | | | (0.575) | (0.104) | (0.066) | 2880 | | (0.300) | (0.078) | (0.295) | (0.350) |
| D-436-0150 | Α | D-609-08 | 14.6 | 3.80 | 2.55 | 1900- | Yellow | | | | |
| | | | (0.575) | (0.150) | (0.100) | 6755 | | | | | |


MATERIALS


- 1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- 2. MELTABLE RINGS: Thermally stabilized thermoplastic. Color: natural.
- 3. CRIMP BARREL: Tin plated copper alloy. Color: see table.

APPLICATION

- 1. These controlled sealing systems are designed to make an immersion resistant multi-wire in-line splices made with wires having tin or silverplated conductors and insulations rated for at least +125°C.
- 2. Parts may be used to splice up to 5 wires having an insulation less than Ø2 (0.078) or up to 10 wires (2 per hole) with insulation less than Ø1 (0.039).
- 3. Temperature range: -55°C to +150°C.
- 4. For assembly instruction, see Raychem Installation Procedure RPIP-826-00.

For best results, prepare the cable as shown:





^{*} A trademark of Raychem Corporation.

| Raychem | | THERMOFIT DEVICES | | 300 Cons | Corporation titution Drive rk, CA 94025 | IN-LINE CRIMP SPLICE DEVICE IMMERSION RESISTANT | | | | |
|---|--|----------------------|--|-------------------------------|--|---|----------------|-----------------------|------------------|--|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS. | | | | | | DOCUMENT NO.: D-436-0148/-0150 | | | | |
| TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A | | OUGHNESS IN the | | t any time. ility of the p | right to amend this Users should evaluate roduct for their | DCR NUMBER: D98104 | 12 | REPLACES: D436014X | | |
| DRAWN BY: M. FORONDA | | DATE: 06/23/98 | | 8 | PROD. REV. SEE TABLE | DOC ISSUE: | SCALE: None | SIZE: | SHEET: 1 of 1 | |

单击下面可查看定价,库存,交付和生命周期等信息

>>TE Connectivity(泰科)