


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00				
F		ADD 9--0 & 9--1 PER 0512-0217-03	18NOV03	AWF	AWF

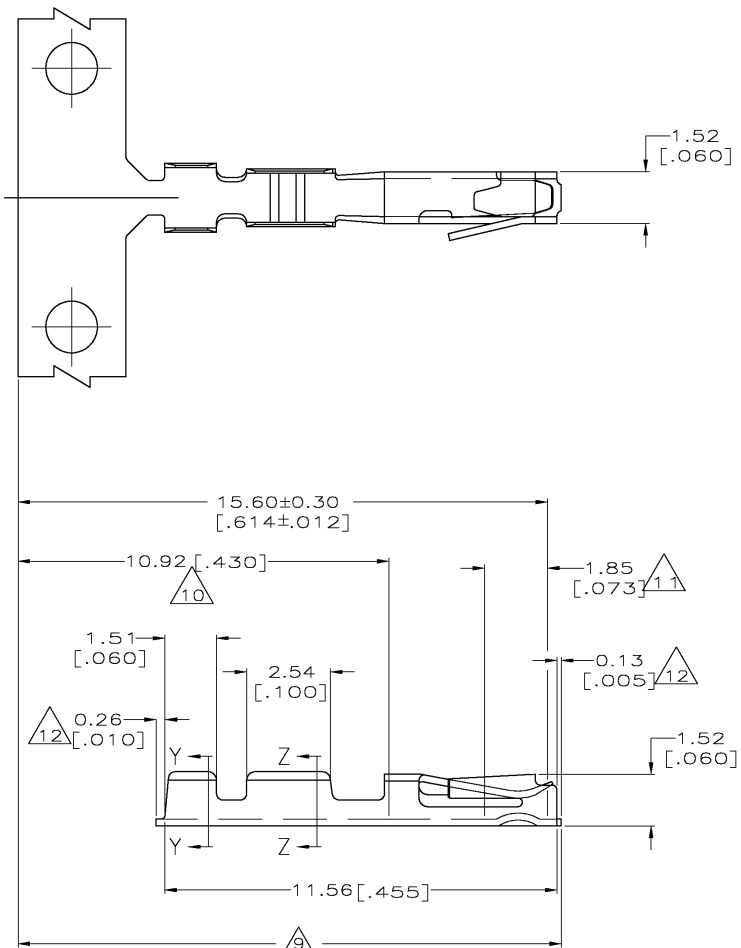

1. WIRE RANGE 22-26 AWG.
2. INSULATION RANGE 0.91-1.37 [.036-.054] DIA.
3. 0.00254 [.000100] MIN TIN-LEAD OVER 0.000762 [.000030] MIN NICKEL.
4. PREPLATED 0.00127 [.000050] MIN TIN-LEAD IN ZONES I & II, 0.000762 [.000030] MIN GOLD OVER 0.000762 [.000030] MIN NICKEL INLAY IN ZONE III.
5. PREPLATED 0.00127 [.000050] MIN TIN-LEAD IN ZONES I & II, 0.00127 [.000050] MIN GOLD OVER 0.000762 [.000030] MIN NICKEL INLAY IN ZONE III.
6. PREPLATED 0.00127 [.000050] MIN TIN-LEAD IN ZONES I & II, 0.000381 [.000015] MIN GOLD OVER 0.000762 [.000030] MIN NICKEL INLAY IN ZONE III.
7. PHOSPHOR BRONZE.
8. OBSOLETE.
9. ZONE I (OUTSIDE SURFACES).
10. ZONE II (INSIDE SURFACES).
11. ZONE III (INSIDE SURFACES).
12. MAXIMUM CUTOFF.
13. PREPLATED 0.00127 [.000050] MIN TIN IN ZONES I & II, 0.00127 [.000050] MIN GOLD OVER 0.000762 [.000030] MIN NICKEL INLAY IN ZONE III.

	9-531224-1	9-531224-0
3		
4	5	8
5	8	8
6	8	8
7	8	8
8	8	8
9	8	8
FINISH	LOOSE PIECE PART NO	STRIP PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DN B. HAYMAKER 25JAN99	Tyco Electronics Corporation	
DIMENSIONS: MM		DR S. BOLASH 25JAN99	Harrisburg, PA, 17105	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. BOLASH 25JAN99	CONTACT, RECEPTACLE, HIGH PRESSURE, MINI-TANDEM SPRING	
0 PLC ± -	PRODUCT SPEC 108-25031	RESTRICTED TO		
1 PLC ± -	APPLICATION SPEC 114-25021	SIZE A2	DATE CODE 00779	DRAWING NO 531224
2 PLC ± -	WEIGHT -	CUSTOMER DRAWING		
3 PLC ± 0.13(.005)	SCALE 4:1	SHEET 1	OF 1	REV F
4 PLC ± ± .1				
ANGLES ± ± .1				
FINISH 3 4 5 6 13				

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)