
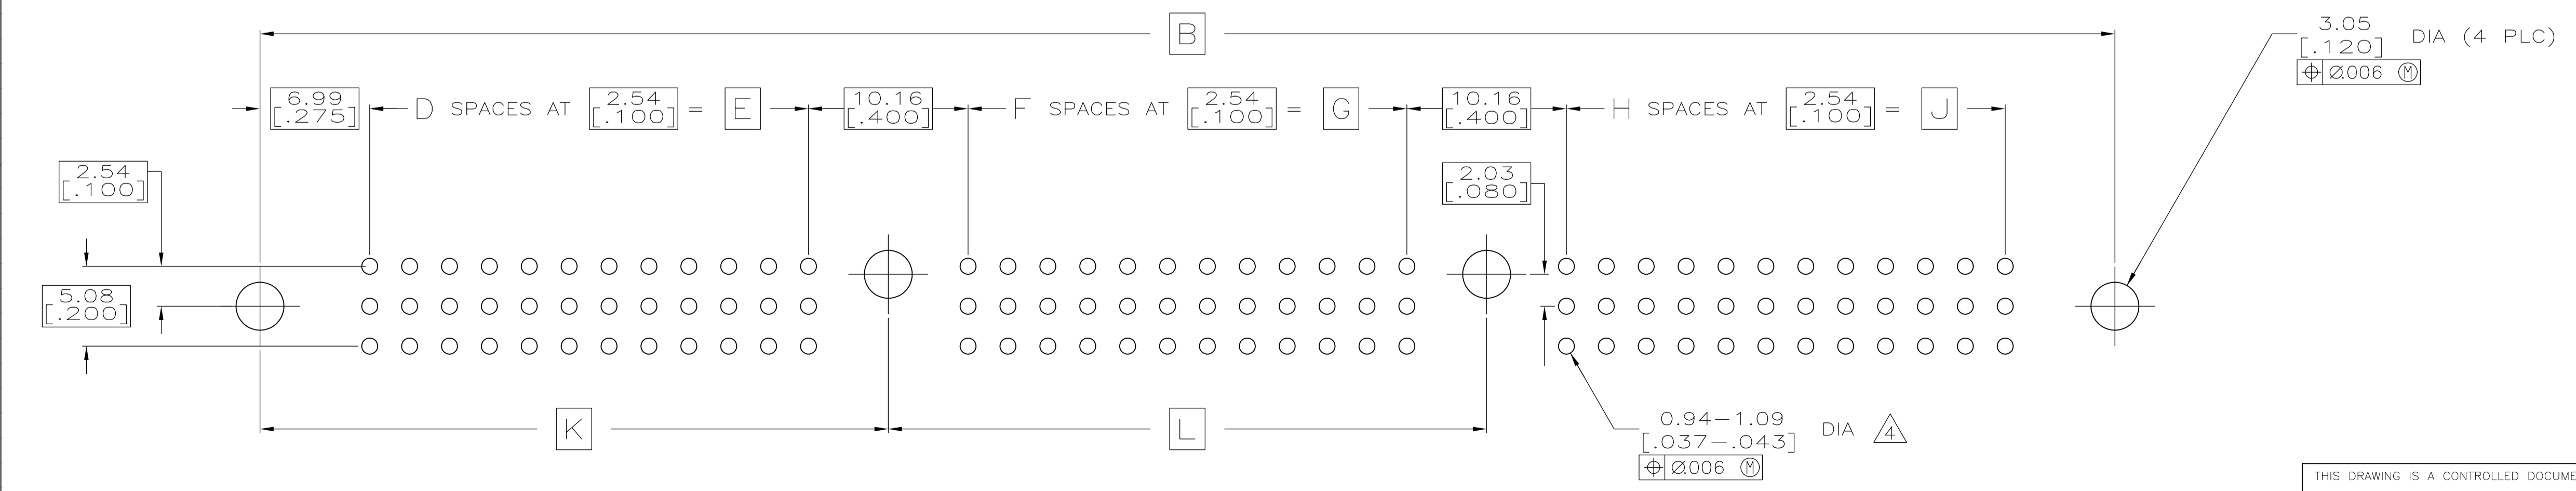
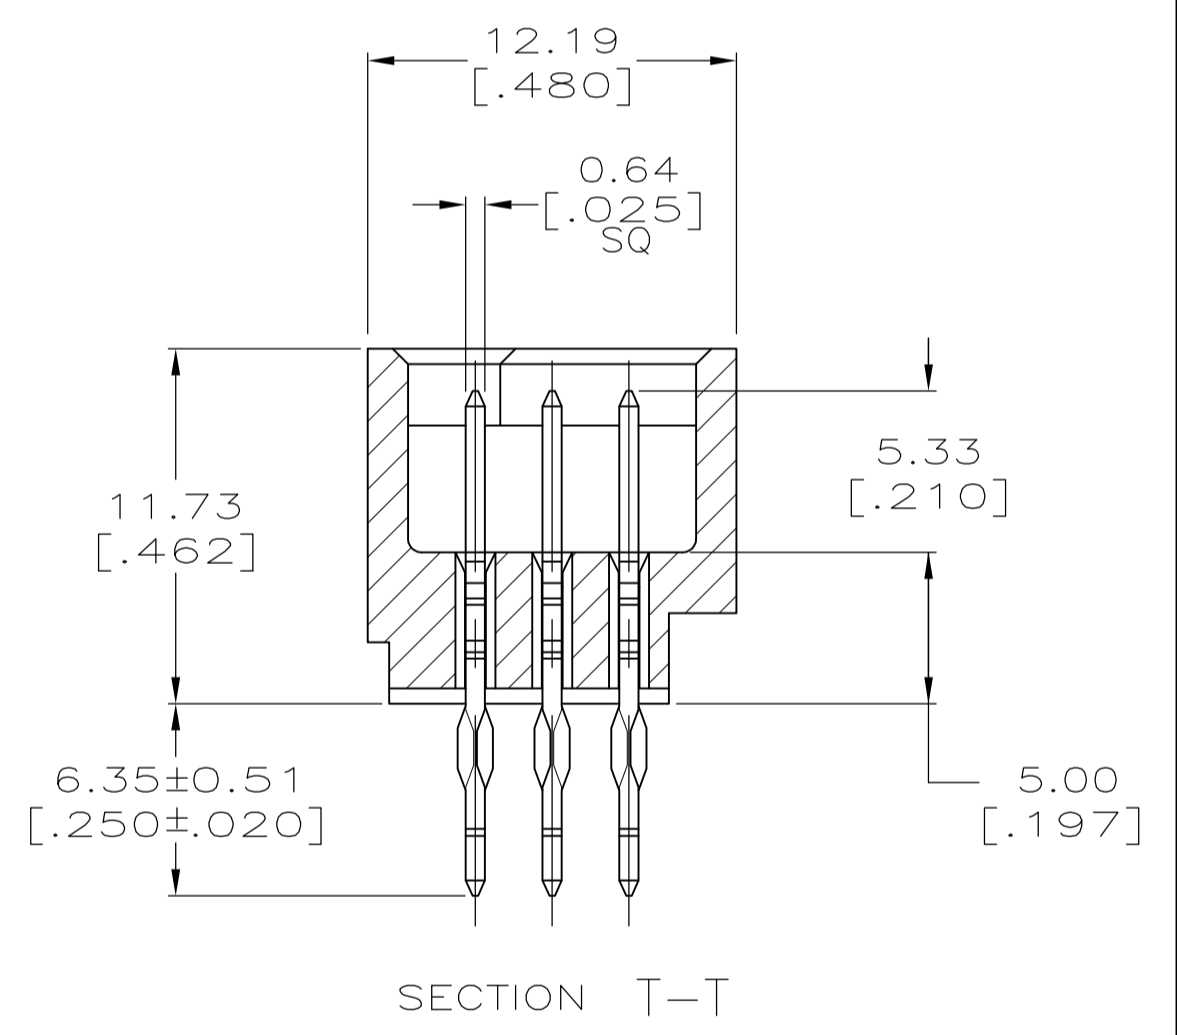
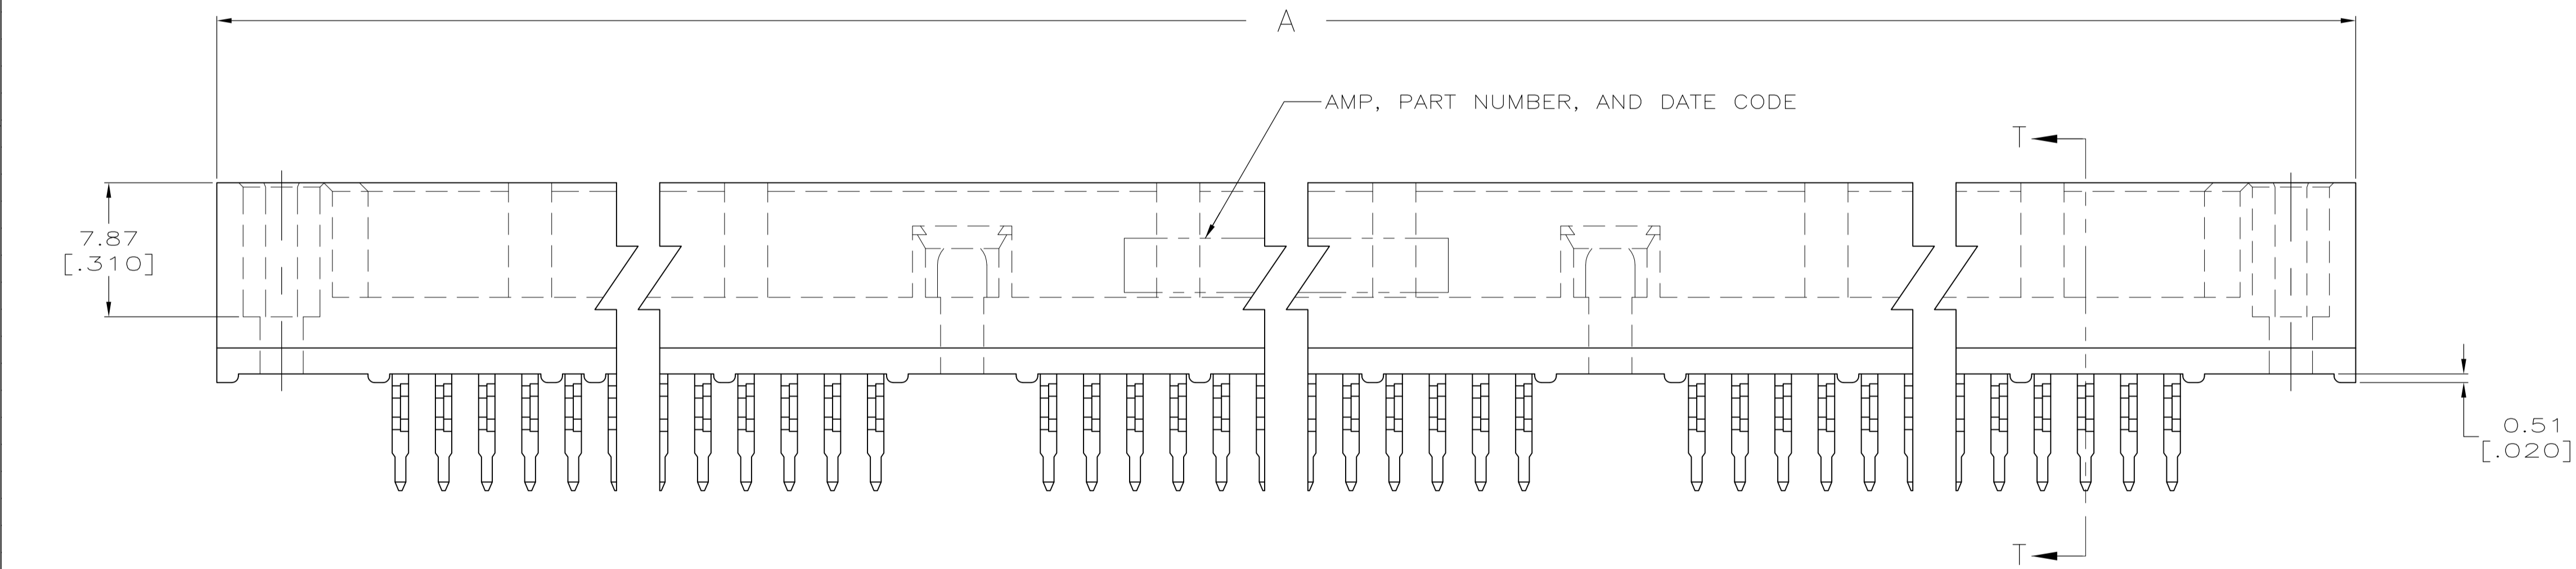


REVISIONS				
P	LTR	DESCRIPTION	DATE	APPV
H	PER	ECO-15-015252	13NOV15	BJ FY

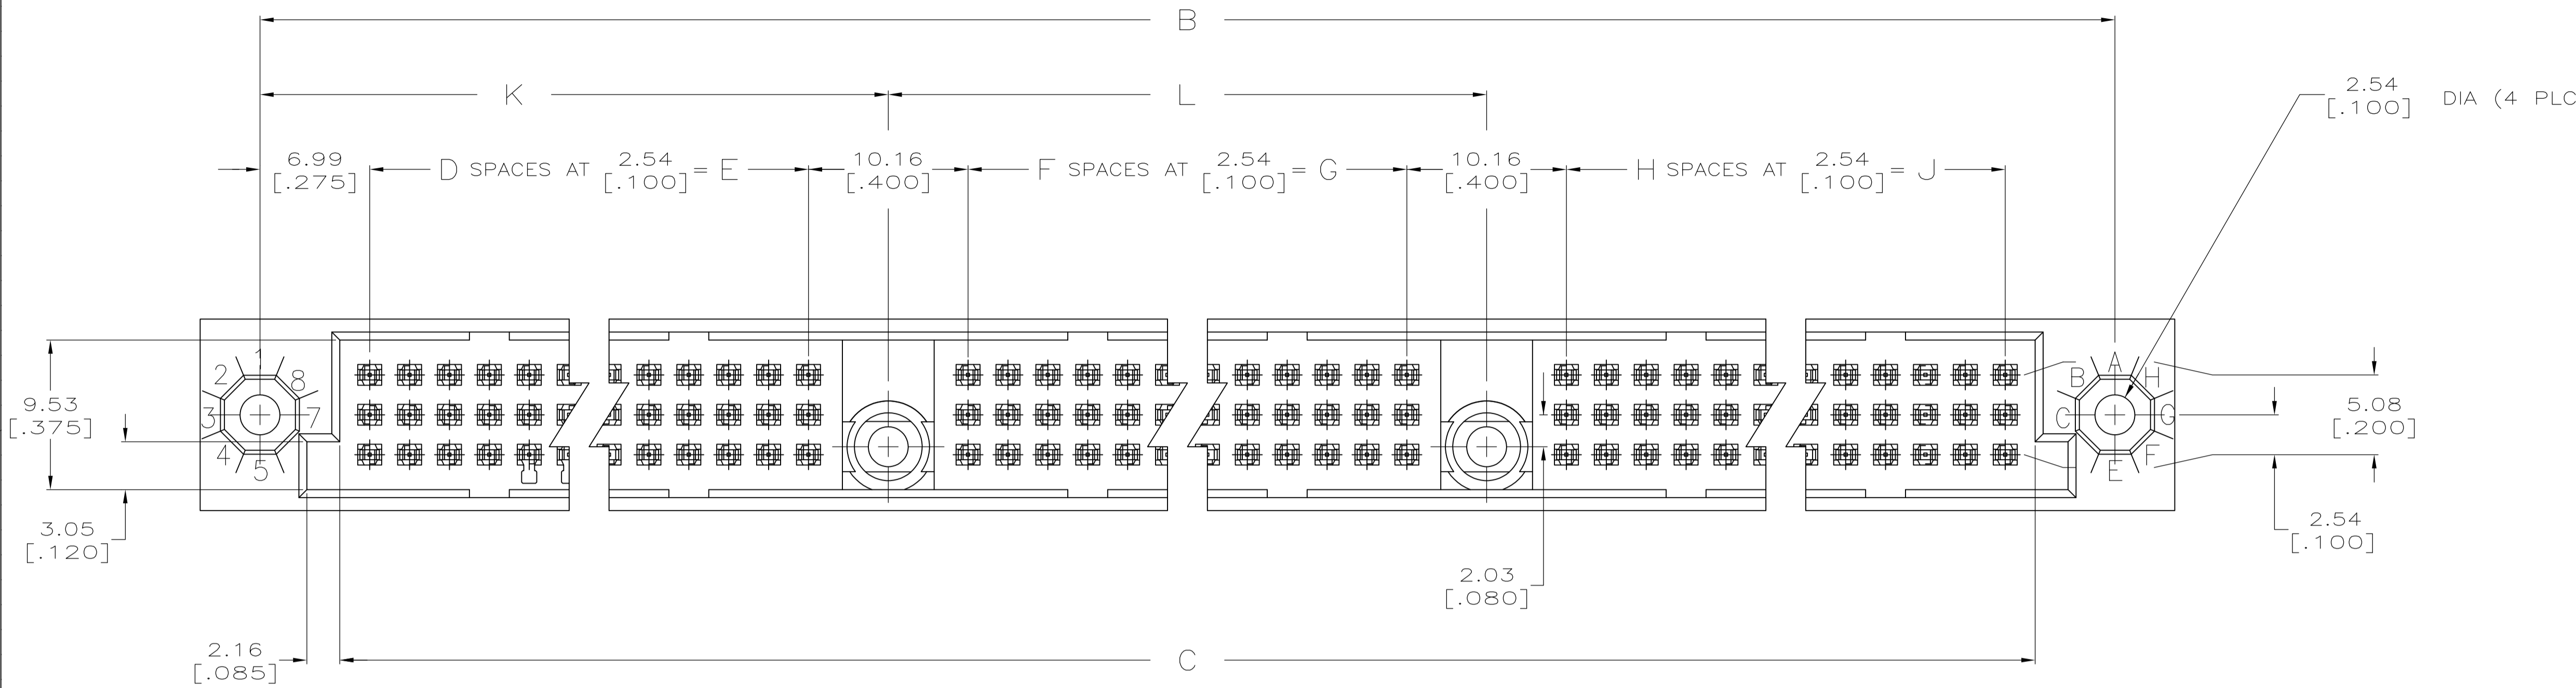

RECOMMENDED P.C. BOARD LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN R.K. SEIFRIED 04/17/90	TE Connectivity
DIMENSIONS: mm [INCHES]		CHK F. KIBLER 8-17-92	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPV	NAME
0 PLC ± -	1 PLC ± -	PRODUCT SPEC	HDI, 3 ROW, PIN ASSEMBLY, TWO CENTER GUIDE PINS, 6.35[.250] LONG ACTION PINS
2 PLC ± -	3 PLC ± 0.13 [.005]	APPLICATION SPEC	SIZE CAGE CODE DRAWING NO. RESTRICTED TO
4 PLC ± -	ANGLES ± -	WEIGHT 0	A1 00779C=533094
MATERIAL	FINISH	CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 2 REV H

REVISIONS table with columns P, LTR, DESCRIPTION, DATE, DWG, and APVD. Row 1: SEE SHEET 1.

- 1 HOUSING MATERIAL: THERMOPLASTIC, COLOR-NATURAL.
2 CONTACT MATERIAL: PHOSPHOR BRONZE.
3 FINISH: MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-9063; BASED ON TELCORDIA DR-1217-CORE APPLICATIONS IN UNCONTROLLED ENVIRONMENTS. SOLDER TAILS AREA: TIN-LEAD PLATED.
4 ACTION PIN POSTS REQUIRE 2.36 [.093] MIN THICK P.C. BOARD. RECOMMENDED P.C. BOARD HOLES ARE 1.151 [.0453] DIA PLATED THRU WITH 0.025-0.076 [.001-.003] COPPER; WITH 0.0076 [.0003] MIN TIN-LEAD PLATING; FINISHED HOLE AFTER PLATING 0.94-1.09 [.037-.043] DIA.
5 PART NUMBER IS OBSOLETE.
6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

Dimensional table with columns L, K, J, H, G, F, E, D, C, B, A, POSN, and PART NUMBER. Includes rows for dimensions 533094-9 through 533094-1.

Product information and title block including: THIS DRAWING IS A CONTROLLED DOCUMENT, DIMENSIONS, TOLERANCES UNLESS OTHERWISE SPECIFIED, MATERIAL, FINISH, R.K. SEIFRIED, F. KIBLER, APVD, PRODUCT SPEC, APPLICATION SPEC, SIZE, CAGE CODE, DRAWING NO, RESTRICTED TO, CUSTOMER DRAWING, SCALE 4:1, SHEET 2 OF 2, REV H.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)