


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER ECO-19-009164	23JUN2020	SJ	DR

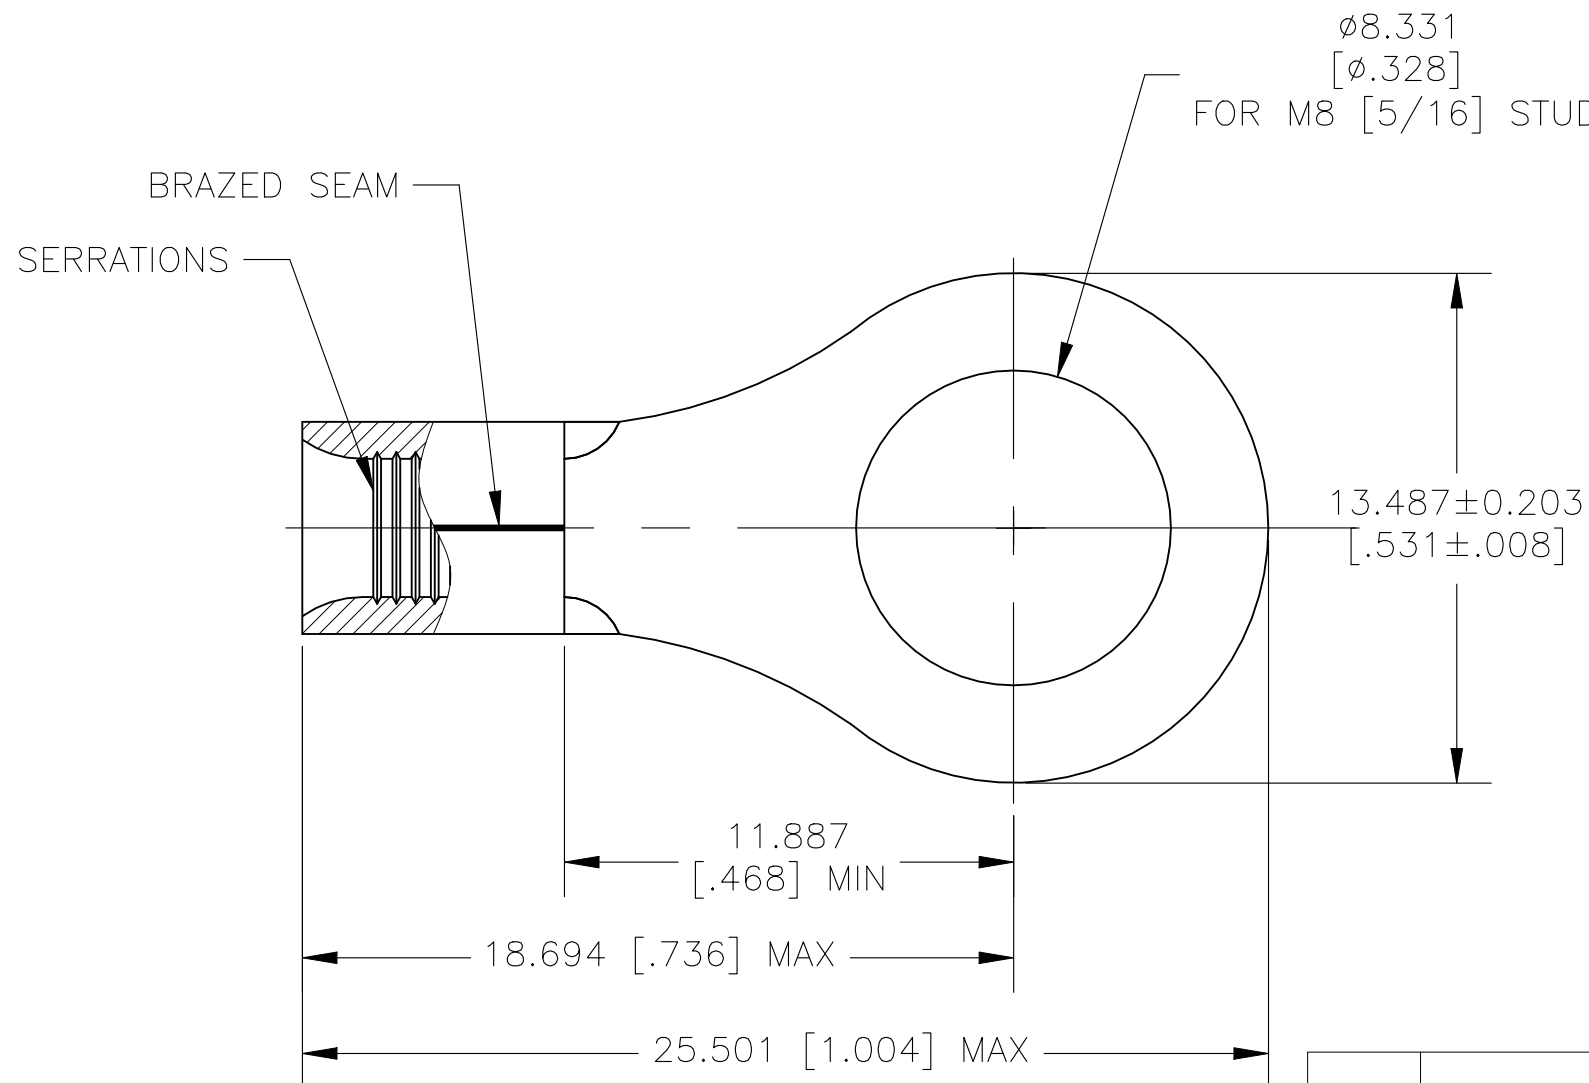

1. WIRE RANGE: 12-10 AWG. STANDARD WIRE CROSS SECTIONAL AREA RANGE: 5,180-13,100 CIRCULAR MILS, STRANDED
2. TERMINAL BODY MATERIAL THK IS 0.990±0.076[.039±.003]
3. RECOMMENDED OPERATING TEMP -55°C(-67°F) TO +200°C(392°F) FOR HEAT SHRINK TUBING.
4. HEAT SHRINK TUBING SHELF LIFE OF 18 MONTHS FROM DATE CODE ON LABEL.
5. TERMINAL BODY PRODUCT SPECIFICATION 108-32046. APPLICATION SPECIFICATION 114-2162.

1	2-1197130-7	HIGH AND LOW TEMPERATURE CROSS LINKED FLUOROPOLYMER HEAT SHRINK TUBING 6.35 [.250] MIN ID X 25.40±2.03 [1.000±.080], RT-555-1/4-0-SP
1	323064	TERMINAL BODY: COPPER PER ASTM B152 ANNEALED FINISH: NICKEL PLATE 0.00762 [.000300] MIN EXT THK PER SAE AMS QQ-N-290
-1	PART NO	DESCRIPTION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 23AUG07	TE Connectivity	
		CHK MJ SPICER 23AUG07		
DIMENSIONS: MM [ INCHES ]		APVD MJ SPICER 23AUG07	NAME HEAT RESISTANT TERMINAL KIT WIRE SIZE: 12-10 AWG	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC -	SIZE A3	
0 PLC ± -		APPLICATION SPEC -	CAGE CODE 00779	DRAWING NO C-1958126
1 PLC ± -			RESTRICTED TO -	
2 PLC ± -				
3 PLC ± 0.127 [.005]				
4 PLC ± -				
ANGLES ± 1°		WEIGHT -	SCALE 1:1	SHEET 1 OF 1
MATERIAL SEE TABLE	FINISH SEE TABLE	CUSTOMER DRAWING		REV B

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)