


COIL: @ +25° C
 RESISTANCE 1250 OHMS ± 10%
 NOMINAL VOLTAGE 26.5-32.0 VDC
 MUST OPERATE 14.0 VDC
 MUST RELEASE 1.5 VDC

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE TIME 4 MS MAX
CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

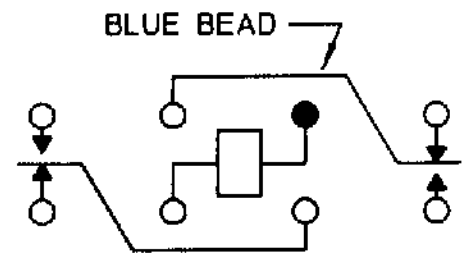

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 11/30/93 CK 2/1/03 RMB

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C. I. I. STD.
 CUST. NO. _____

TYPE "HFW" RELAY

HFW1301D00

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)