
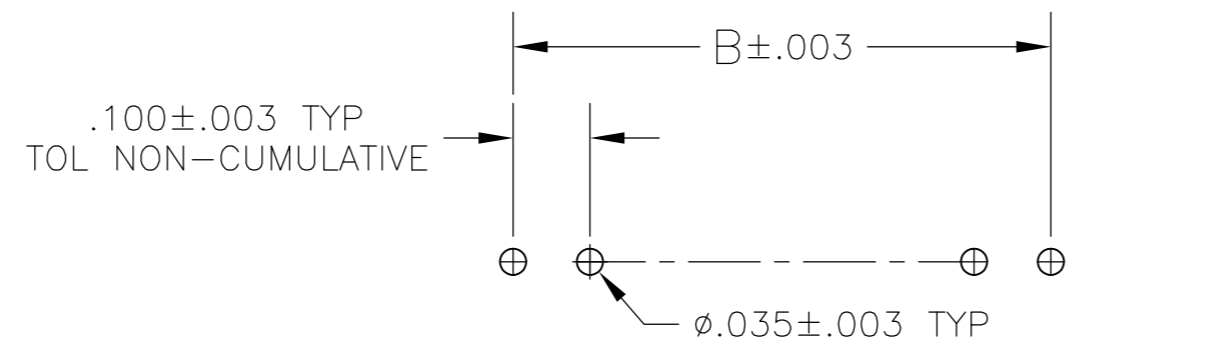


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		H		REVISED PER ECO-14-000066	26JUN2014	NK	MM

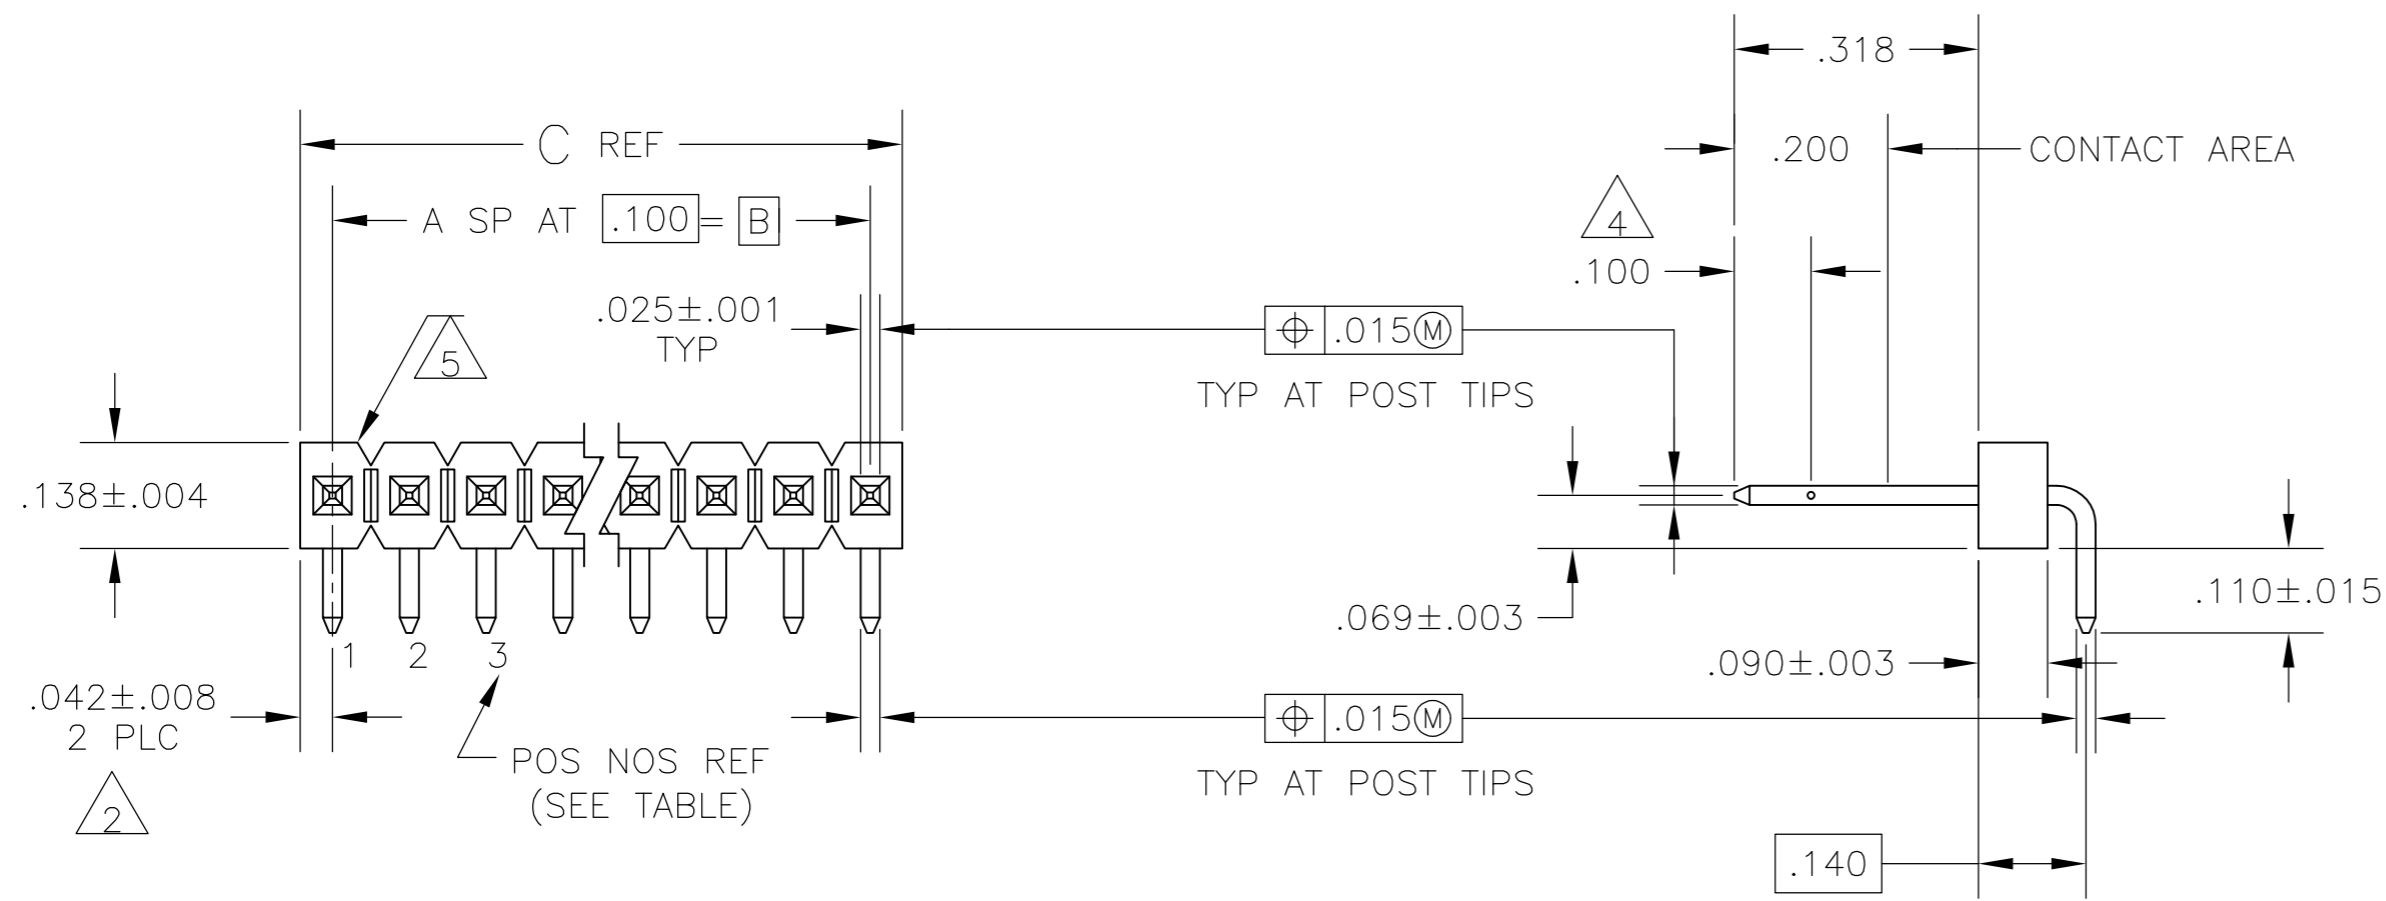

RECOMMENDED HOLE LAYOUT

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- 2 THE NOTED DIMENSIONS APPLY FROM THE BASIC DIMENSION LINE (NOT THE POST CENTERLINE) TO THE SURFACE INDICATED
- 3 .000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 6 .000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL
- 7 HIGH TEMPERATURE CONFIGURATION

7	6	2	.284	.200	2	2	3	5-103870-1
	3	2	.284	.200	2	2	3	103870-1
REMARKS	PLATING	POSTS OMITTED	C	B	A	NO OF ACTIVE POS	NO OF POS	HOUSING PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	L.A.MAYER	11NOV85
CHK	L.D.RINGLEY	12NOV85
APVD	T.J.ZOLA	13NOV85

NAME: ASSY, MOD II, HEADER, BREAKAWAY, RIGHT ANGLE, SINGLE ROW, .100 .025 SQ POSTS, SELECTIVE LOADING

SIZE: A2 CAGE CODE: 00779 DRAWING NO: 103870 RESTRICTED TO: -

MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK POSTS: COPPER ALLOY FINISH: SEE TABLE WEIGHT: - SCALE: 4:1 SHEET: 1 OF 1 REV: H

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)