


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
A		ECO-06-23628	250CT2006	MB	MW		

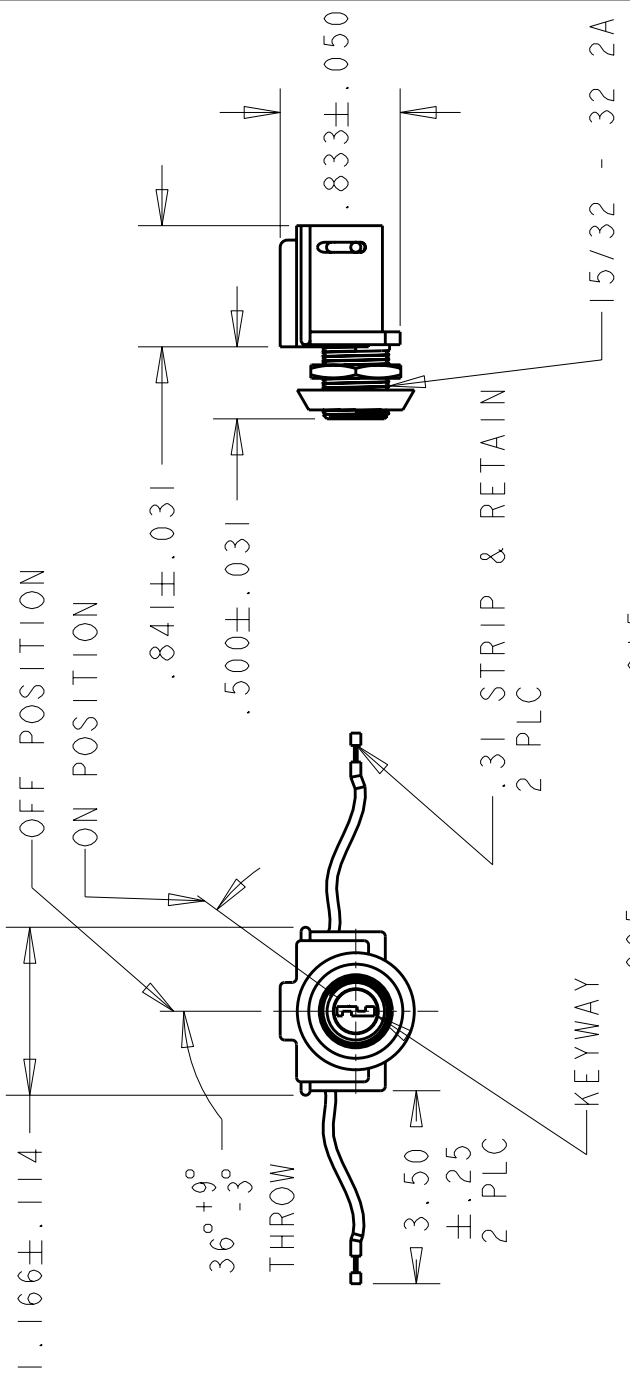

.062⁺.005₋ W X .030⁺.015₋ D

- NOTES:
- KEY REMOVABLE IN OFF POSITION ONLY.
 - KEYSWITCH SUPPLIED WITH 1 HEX NUT, 1 DRESS NUT AND 1 KEY.
 - WIRE: 18 AWG BOND WIRE, TINNED, PVC INSULATED, W/ 80°C AND 300 V RATING (UL 1007).
CONTACT MATERIAL: MOVABLE-BRONZE, SILVER PLATED;
STATIONARY-BRASS, SILVER PLATED.
CIRCUIT: SPST
ACTION: OFF-ON
 - ELECTRICAL SPECIFICATIONS:
KEYSWITCH RATING: 6A, 125V AC; 3A, 250V AC
DIELECTRIC VOLTAGE: 1000V RMS MIN.
INSULATION RESISTANCE: 100 MΩ MIN.
CONTACT RESISTANCE: 100 mΩ MAX.
CYCLE LIFE: 6000 OPERATIONS MIN.
TEMPERATURE RISE: <30°C AT 6000 OPERATIONS
 - ENVIRONMENTAL SPECIFICATIONS:
OPERATING TEMP: -18°C TO 65°C

1571487-1 PART NUMBER

DIMENSIONS: INCHES		DWN 12NOV2003		MATERIAL		FINISH	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		J.C. YOSLER			Tyco Electronics		
0 PLC ± .03		CHK M. WILBOURN	07NOV2006		Harrisburg, PA 17105-3608		
1 PLC ± .015		APVD M. WILBOURN	07NOV2006		KEYSWITCH, SPST		
2 PLC ± .010		PRODUCT SPEC			SIZE CAGE CODE DRAWING NO		
3 PLC ± .010		APPLICATION SPEC			A4 00779 C=1571487		
4 PLC ±					RESTRICTED TO		
ANGLES ±1/2					SCALE 3:4 SHEET 1 OF 1 REV A		
		WEIGHT -		CUSTOMER DRAWING			

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)