



a. Part as supplied.

222W163 - 25

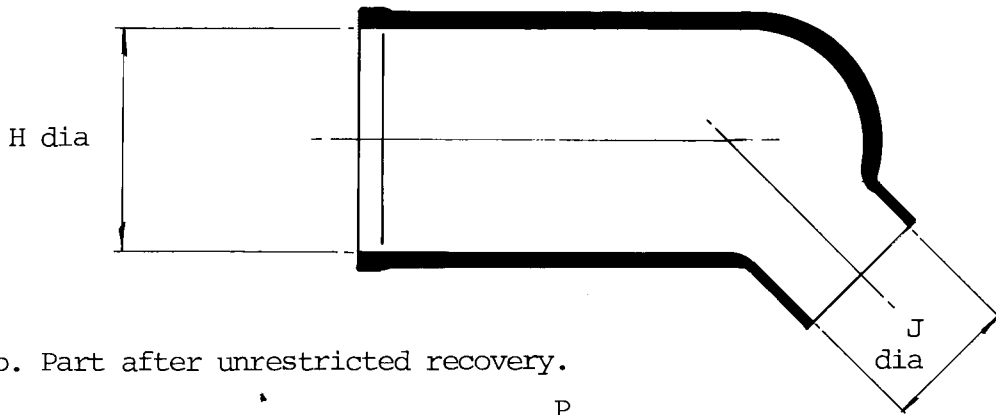

b. Part after unrestricted recovery.

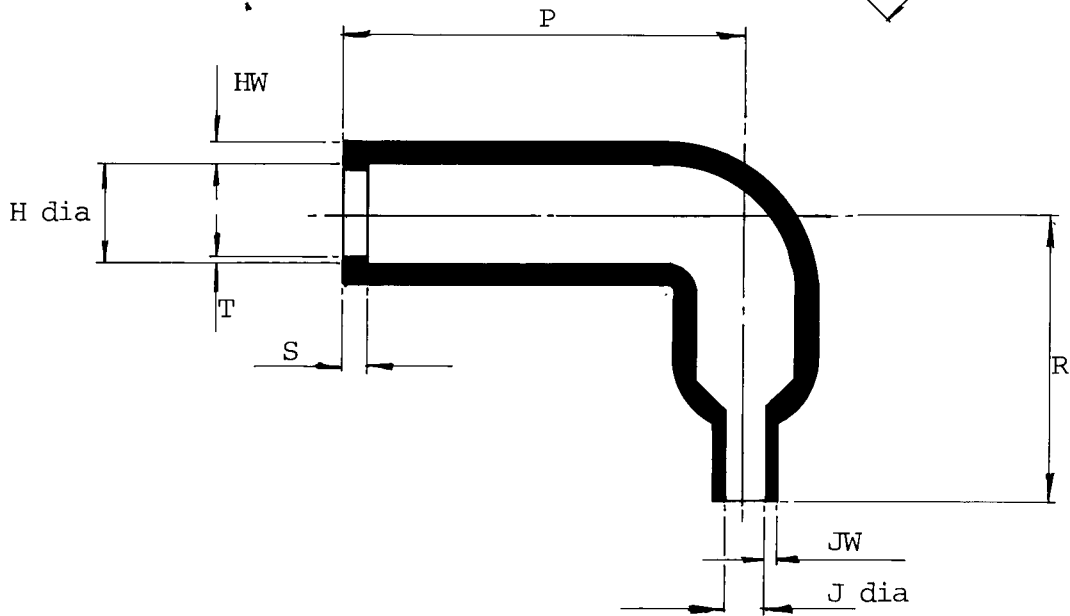

Dimensions (in millimetres)

Part No.	H		J		P	R	S	T	HW	JW
	min a	max b	min a	max b	+10% b	+10% b	+10% b	+20% b	+20% b	+20% b
222W163	28	13,6	15	5,8	53	38	3,0	1,0	2,8	1,5


Drawn G. Evans Checked P. 12/11/81 Issue 1 Date May 1981

Approval


Design

GW MKTG *FR* O.C. *[Signature]*

Conforms to ISO Recommendations
3rd Angle Projection
Not to scale



Ordering Information

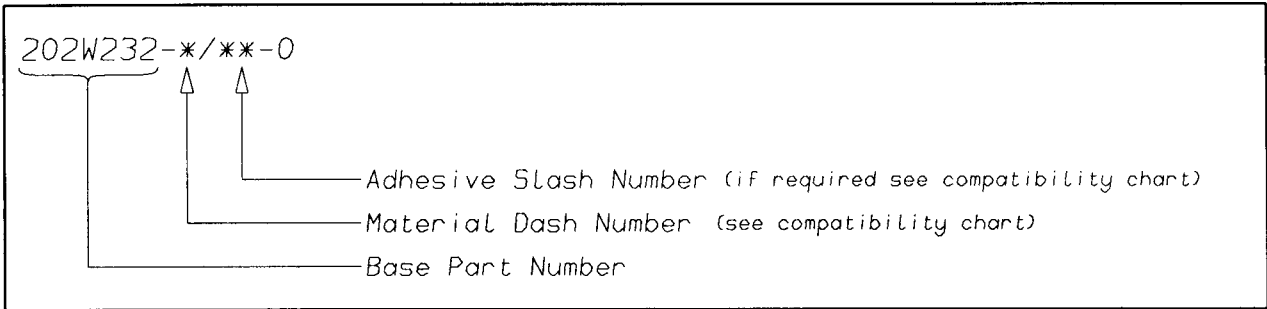

COMPATIBILITY CHART

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42, /86
-4	POLYOLEFIN, FLEXIBLE	/42, /86
-25	ELASTOMER, FLUID RESISTANT	/86, /225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

POTTING PORTS ARE OPTIONAL
WHEN SPECIFIED BY SUFFIX "-00"
THEY WILL BE LOCATED AS SHOWN

Raychem
Electronics OEM Division Europe
Swindon, Wiltshire, England.
Telephone: (01793) 528171 Fax: 573923

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)