


PART NO.	'A'	'B'
5863701-5	36.00 [914.4]	.38 [9.7]
5863701-8	24.00 [609.6]	.38 [9.7]
1-5863701-1	12.00 [304.8]	.38 [9.7]
1-5863701-3	48.00 [1219.2]	.38 [9.7]
1-5863701-9	16.00 [406.4]	.38 [9.7]
6-5863701-4	30.00 [762.0]	.38 [9.7]

LOC	DIST	REVISIONS				
DF	X5	REV	DESCRIPTION	DATE	BY	APP'D
		A	RELEASED PER ECO-05-001646	06-05	AA	DE

1. TOLERANCE OF LEAD LENGTH:  
 UP TO 24 INCHES [609.6] = ±.12 [±3.0]  
 24 INCHES [609.6] & UP = 1%
2. MARKED PER MIL-STD-130.
3. INSULATION CUT TO LENGTH 'B' BUT NOT REMOVED.
4. TO MATE WITH AMP LGH-1 RECEPTACLE WITH .88 BARREL DEPTH.
5. OPERATING VOLTAGE: 20 KVDC AT 0 TO 70,000 FEET, -55°C TO 125°C.

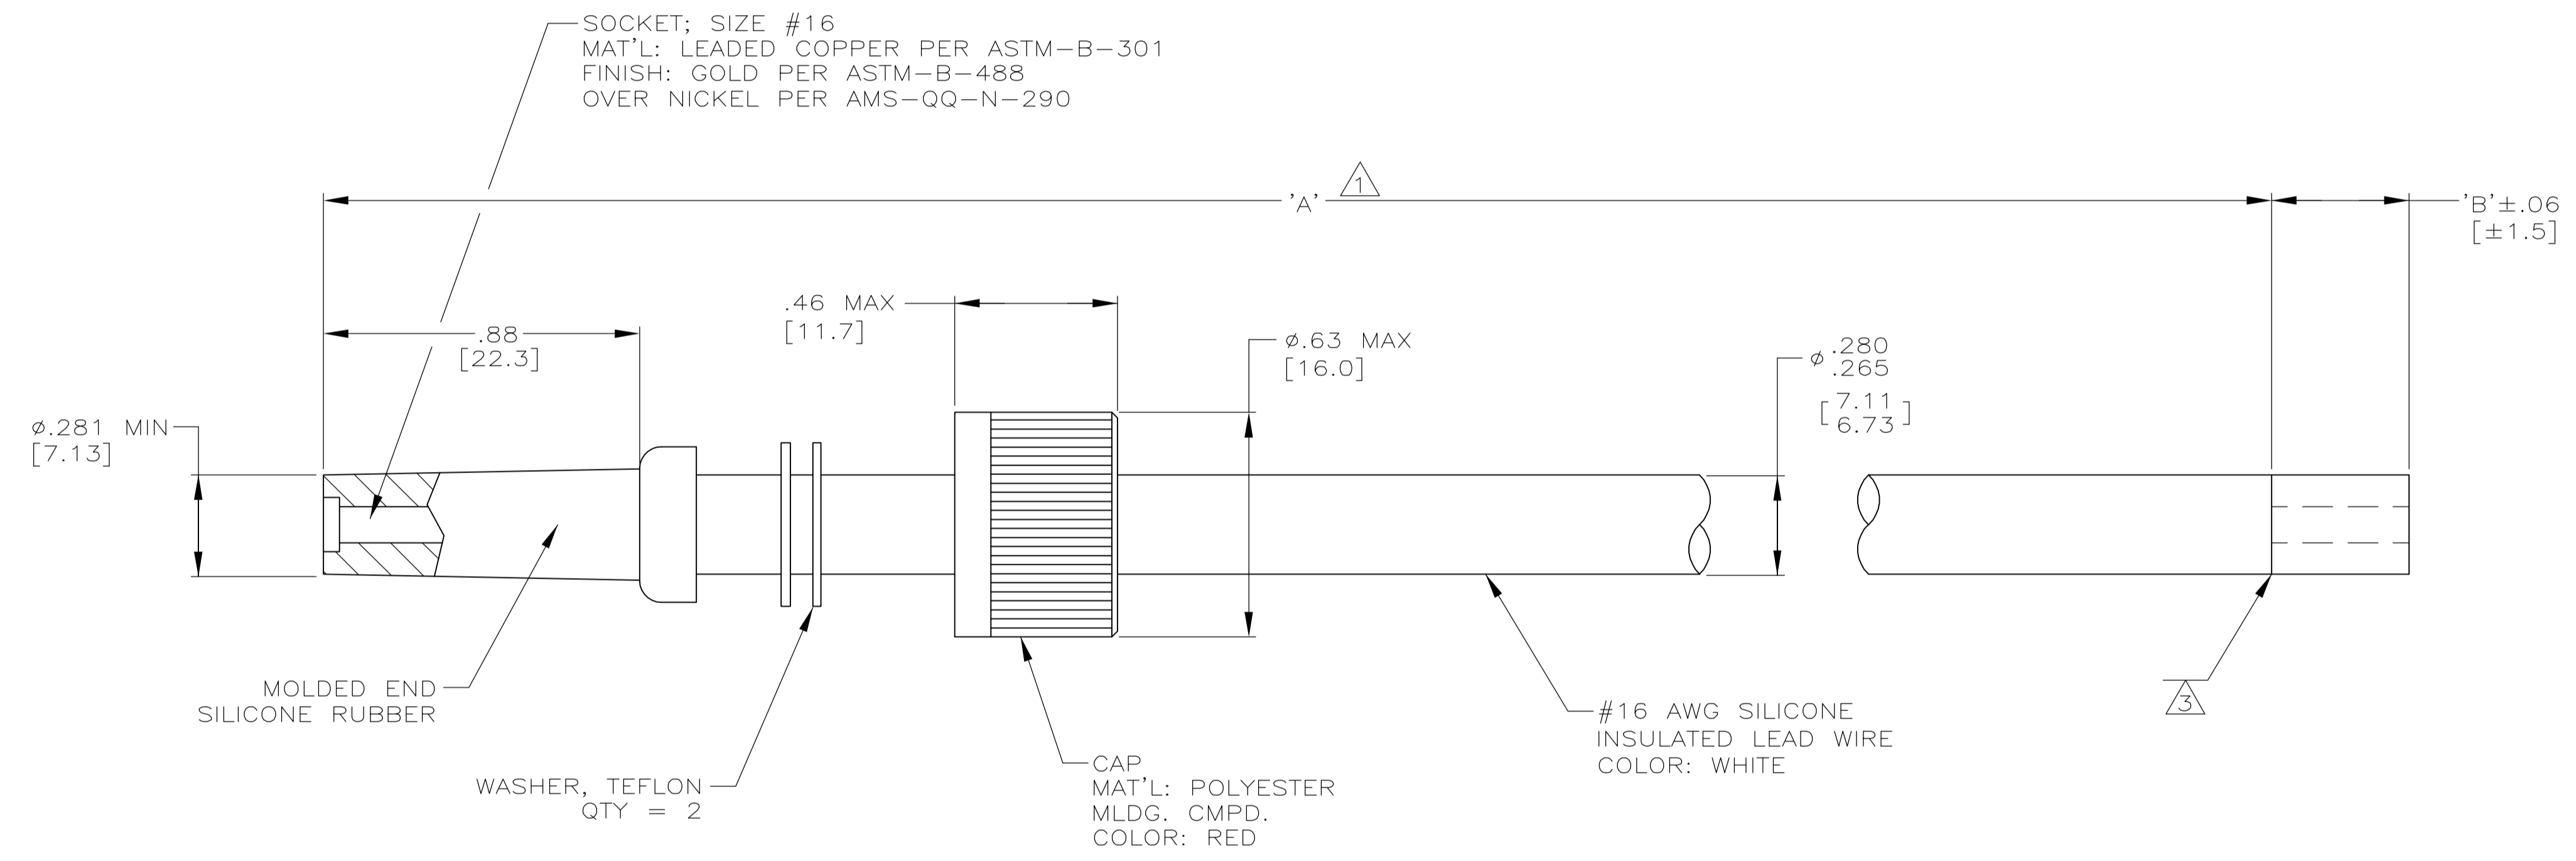

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG A.H.ANDERSON 10-JUN-05		Tyco Electronics Corporation Harrisburg, Pa 17105-3608
DIMENSIONS: INCHES		CHK D. FARY 10-JUN-05		NAME D. FARY
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPROD D. FARY 10-JUN-05	PRODUCT SPEC	APPLICATION SPEC
0 PLC ± - 1 PLC ± - 2 PLC ± .02 [0.5] 3 PLC ± - 4 PLC ± - ANGLES ± -		SIZE A1	CAGE CODE 00779	DRAWING NO C=5863701
MATERIAL SEE CALLOUTS		FINISH SEE CALLOUTS	WEIGHT -	RESTRICTED TO -
CUSTOMER DRAWING			SCALE 3:1	SHEET 1 OF 1 REV A

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)