



SPECIFICATION CONTROL DRAWING

TECC0018C7

Issue 6  
12-Apr-21  
Page 1 of 2

COMMUNICATION CABLE - FOUR PAIR 26AWG S/FTP CAT7 LSZH

The complete requirements for procuring the wire described herein shall consist of this document and the issue in effect of the referenced specifications. This document takes precedence over documents referenced herein.

PRODUCT DETAILS

DESCRIPTION	
Application:	100Base-T4, 100Base-TX, 100VG-AnyLAN, 1000Base-T, 1000Base-TX 155Mbps ATM, 622Mbps ATM, 10 Gb Ethernet
Rated temperature:	75°C
Reference Standard:	61156-6,ISO/IEC 11801
Flammability Rating:	IEC 60332-3-25 & IEC 60332-1-2
Stranded Tinned Copper Conductor	
Colour-coded PE Insulation	
LSZH Jacket	
Packaging: Per customer request	


PHYSICAL CHARACTERISTICS		
<b>Structure</b>	Construction	S/FTP
	Number of Pairs	4 Pairs
<b>Conductor</b>	AWG	26 AWG
	Conductor material	Stranded Tinned Copper
	Conductor dimension(mm)	(7/0.155) ± 0.02mm
<b>Insulation</b>	Insulation material	Foam PE
	Insulation dimension(mm)	0.99 ± 0.05 mm
	Nom. Thickness (mm)	0.28 mm
<b>Cabling</b>	Twisting lay length	≤ 30 mm
	Cabling lay length	≤ 200 mm
<b>Filler</b>	Material	N/A
<b>Wrap</b>	Material	Optional
<b>Shield</b>	Individual shield & material	AL-Foil
	Primary overall shield & material	Tinned Copper Wire
	Shield nom. Coverage	35% Min.
	Drainwire	N/A
<b>Outer Jacket</b>	Outer Jacket material	LSZH
	Outer Jacket Thickness (mm)	1.0 mm Nom
	Overall Nom Dimension (mm)	7.2 ± 0.3mm
	Outer Jacket Rip cord	N/A
	Outer Jacket Colour	Per Customer Request

MECHANICAL CHARACTERISTICS		
<b>Outer Jacket</b>	Operating Temp Range	-20°C to +75°C
	Bulk Cable weight	54 kg/km
	Max. recommended pulling tension	80 N
	Min. bend radius (Install)	8 x O.D.
	Tensile Strength	≥ 9 Mpa
	Elongation	≥ 100%
	Ageing Condition	100°C x 168hrs
	After Ageing Tensile Strength	≥ 70% of Unaging
	After Ageing Elongation	≥ 50% of Unaging
	Cold Bend	No cracks -20°C/4hrs

ELECTRICAL CHARACTERISTICS		
<b>Finished Cable</b>	Nom. mutual capacitance	≤ 5.6 nF/100m (@1kHz)
	Pair-ground capacitance unbalance	≤ 160 pF/100m
	Nominal velocity of propagation	65%
	Max. delay skew	25 ns/100m
	Max. Conductor DC resistance	145 Ω/km (@ 20°C)
	Max. Conductor resistance unbalance	2%
	Min. insulation resistance	5000 MΩ·km
	Max. operating voltage - UL	300 V

JACKET MARK	
"TE CONNECTIVITY - TECC0018C7 - 4PR 26AWG STRANDED CAT 7 CABLE - YEAR OF MANUFACTURE - BATCH NUMBER - METRE MARK"	

CROSS SECTION

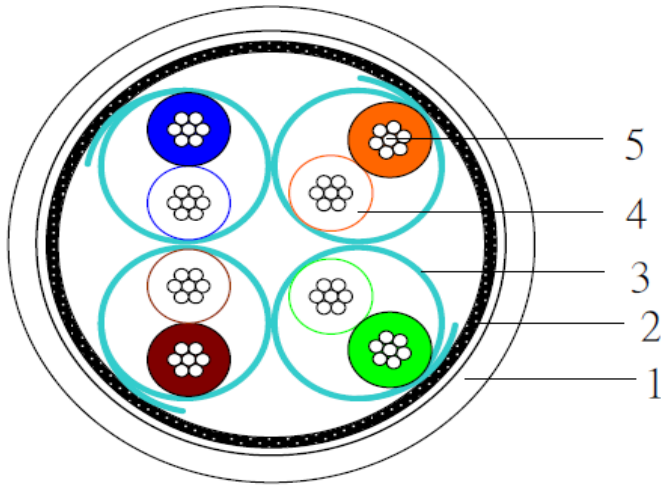

1	Jacket
2	Braid
3	AL-Foil
4	Insulation
5	Conductor

Tyco Electronics UK Ltd.  
Faraday Road  
Dorcan  
SWINDON  
SN3 5HH  
Tel: +44 (0)1793 528171  
Fax: +44 (0)1793 572516

TE Connectivity is a trading name of Tyco Electronics UK Ltd, Which is registered in England and Wales, number 550926. Registered office: Faraday Road, Dorcan, Swindon, SN3 5HH Website: [www.te.com](http://www.te.com)

This drawing and the information set forth hereon are the property of Tyco Electronics UK Ltd, and are to be held in trust and confidence. Publication, duplication, disclosure or use for any purpose not expressly authorised in writing by Tyco Electronics UK Ltd is prohibited.

This specification sheet takes precedence over documents referenced herein. As Tyco Electronics UK Ltd, reserve the right to make changes in construction without notice please contact Tyco Electronics UK Ltd to ensure that this document is the latest issue.



SPECIFICATION CONTROL DRAWING

TECC0018C7

Issue 6  
12-Apr-21  
Page 2 of 2

COMMUNICATION CABLE - FOUR PAIR 26AWG S/FTP CAT7 LSZH

The complete requirements for procuring the wire described herein shall consist of this document and the issue in effect of the referenced specifications. This document takes precedence over documents referenced herein.

ELECTRICAL CHARACTERISTICS CONTINUED

Frequency	Impedance Upper Limit	Impedance Lower Limit	ATT	RL	NEXT	PS NEXT	FEXT	PD
(MHz)	Zu (Ω)	Zl (Ω)	(Db/100m)	(dB Min)	(dB Min)	(dB Min)	(dB Min)	(ns/100m Max)
1	-	-	3.0	23.0	78.0	75.0	70.0	570.0
4	115.2	86.8	5.6	23.0	78.0	75.0	70.0	552.0
8	112.6	88.8	7.9	24.5	78.0	75.0	70.0	546.7
10	111.9	89.4	8.8	25.0	78.0	75.0	70.0	545.4
16	111.9	89.4	11.1	25.0	78.0	75.0	70.0	543.0
20	111.9	89.4	12.4	25.0	78.0	75.0	70.0	542.0
25	113.2	88.3	13.9	24.2	78.0	75.0	70.0	541.2
31.25	114.6	87.2	15.6	23.3	78.0	75.0	70.0	540.4
62.5	120.2	83.2	22.3	20.7	75.5	72.5	70.0	538.6
100	125.3	79.8	28.5	19.0	72.4	69.4	70.0	537.6
200	135.7	73.7	41.2	16.4	67.9	64.9	70.0	536.5
250	140.0	71.4	46.5	15.6	66.4	63.4	70.0	536.3
300	139.8	71.5	51.3	15.6	65.2	62.2	70.0	536.1
600	139.8	71.5	75.1	15.6	60.7	57.7	70.0	535.5

Remark : Cable that meet the requirements of the template are not required to be measured for return loss; alternately cables that meet the return loss requirements are not required to be measured for characteristic impedance.

Mechanical performance Requirements for the tests for outer jacket.

EN 45545 R15&R16 HL3	T09.01 EN 60332-1-2	Single vertical flame	IEC 60332-1-2
	T09.03 EN50305 (for	Bunched cable flame	IEC 60332-3-25
	T13 EN 61034-2	Smoke emission	≥ 70%
	T15 EN 50305	Toxicity index	ITC ≤ 6
Ozone resista	(0.00015-0.00025%)(40±2) °C	No Crack	EN50305 7.4.2
Mineral oil resistance	IRM902/(25) °C X24h	Tensile strength Variation ≤ ±30%.	EN 60811-2-1 10
		Elongation at break Variation ≤ ±40%.	
Fuel resistance	IRM903/(25) °C X24h	Tensile strength Variation ≤ ±30%.	
		Elongation at break Variation ≤ ±40%.	
Cold bend	- (20 ± 2) °C, 8D	No Crack	EN 60811-1-4 8.1
Assessment of halogens	HCl and HBr	≤ 0.5%	EN50267-2-1
	pH	≥ 4.3	EN50267-2-2
	Conductivity	≤ 10 μS/mm	

Approval Electronic sign off - no signatures will appear.

Tyco Electronics UK Ltd.  
Faraday Road  
Dorcan  
SWINDON  
SN3 5HH  
Tel: +44 (0)1793 528171  
Fax: +44 (0)1793 572516

TE Connectivity is a trading name of Tyco Electronics UK Ltd,  
Which is registered in England and Wales, number 550926.  
Registered office: Faraday Road, Dorcan, Swindon, SN3 5HH  
Website: [www.te.com](http://www.te.com)

This drawing and the information set forth hereon are the property of Tyco Electronics UK Ltd, and are to be held in trust and confidence. Publication, duplication, disclosure or use for any purpose not expressly authorised in writing by Tyco Electronics UK Ltd is prohibited.

This specification sheet takes precedence over documents referenced herein. As Tyco Electronics UK Ltd. reserve the right to make changes in construction without notice please contact Tyco Electronics UK Ltd to ensure that this document is the latest issue.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)