



LOC	DIST	P	F	ZONE	LTR	REVISIONS	DESCRIPTION	DATE	APPD
G	14					E	REVISED & REDRAWN PER 0720-0303-93	7-26-93	BB

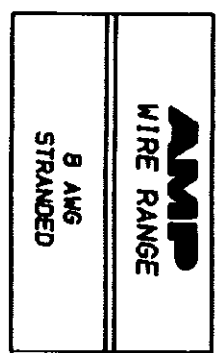

METRIQ
 DIMENSIONS LISTED IN MM [INCHES]

NOTE:
 1. WIRE INSULATION DIA 6.48[.255] MAX

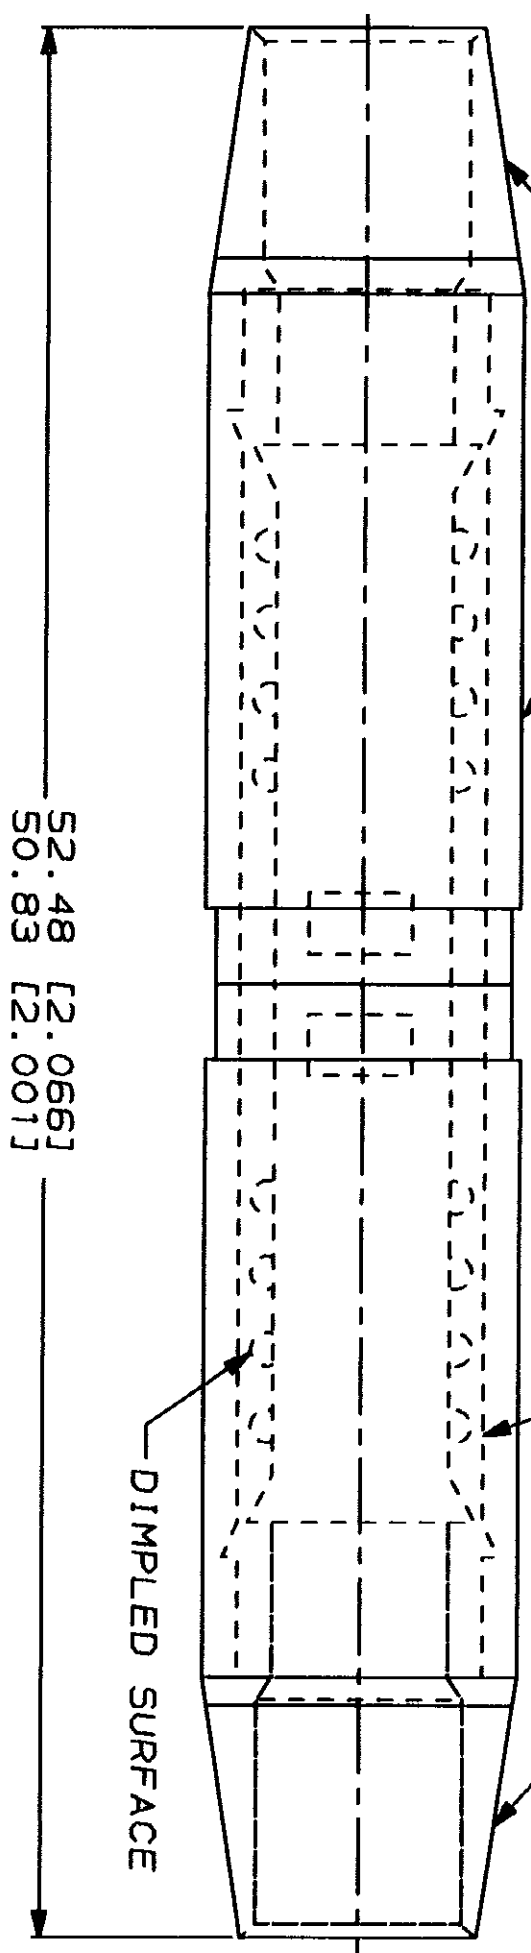

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C		DO NOT SCALE PRINT. UNLESS SPECIFIED		DR 7-26-93 S.S. BOLDEN		QTY 100		LOOSE PC		324625	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS		PRODUCT INFORMATION CENTER 1-800-522-6752		TOLERANCES ON: 2 P.L.C DEC # 0.20(.008) 3 P.L.C DEC # . . .		CHK 7-26-93 R. HERSEY		PACKAGE TYPE		AMP		AMP Incorporated Harrisburg, PA 17105-3608	
FOR APPLICATION		TOOLING ASSISTANCE CENTER 1-800-722-1111		MATERIAL COPPER PER ASTM B-152 MIL-D, COLOR-RED		APPO 7-26-93 B. BAUE		NAME		SPLICE, BUTT, SINGLE TO SINGLE, TERMINAL, WIRE SIZE: 8 AWG		SIZE B	
TOOLING INFORMATION		1-800-526-5142		CIRCULAR MIL AREA: 5.64-10.54mm² [13,100-20,800] STRANDED		APPO 7-26-93 M. BLIS		SCALE		00779		DRAWING NO 324625	
FOR ORDER ENTRY		1-800-526-5142		FINISH TIN PLATE PER MIL-T-10727		PRODUCT SPEC		SHEET		©		1 OF 1	

AMP 1470-15 REV 3-92 05 JAN 1994 17:01:37 AMP10744 <UJI28A>DEPT1132>AMP10744>U. TERMINAL-SPLICE-CUST CUSTOMER DRAWING

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)