
## SPECIFICATION CONTROL DRAWING

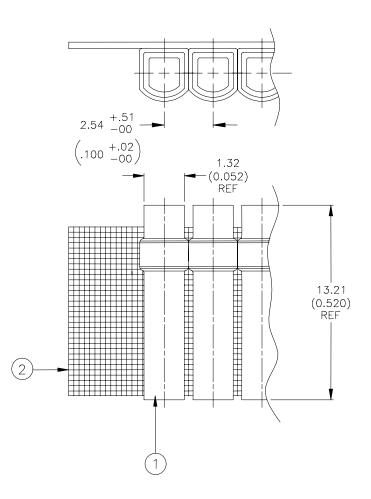

## **MATERIALS**

- 1. SOLDERSLEEVE WIRE TERMINATOR: D-128-0010, Quantity Per Assembly: 1000
- 2. CARRIER STRIP: Adhesive Coated High Temperature Tape

## **APPLICATION**

- 1. This assembly is designed to be used with a Raychem AS-4000 Wire Organization System on connectors with terminals on 2.54 (0.100) center spacing. For usage parameters, see Raychem Devices Specification Control Drawing D-128-0010.
- 2. Wire terminators are to be inspected to Raychem Devices Specification Control Drawing D-128-0010.

	<b>m Inter</b> of <b>type</b> / Electron D onstitution D rk, CA 9402	ect THE DE	RMOFIT VICES	TITLE: 2.54 (.100) Centers   SOLDER PAK ASSEMBLY FOR AS-4000 SLEEVE: D-128-0010					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.						DOCUMENT NO.: <b>D-704-0025</b>			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	drawing ROUGHNESS IN the suit		rawing at any time.	n reserves the right to amend this at any time. Users should evaluate ability of the product for their ion.		DCR NUMBER: D000538		REPLACES: N/A	
DRAWN BY: D M. FORONDA		DATE: 14	4-Nov00	PROD. REV. B		DOC ISSUE: 1	SCALE: None	SIZE: A	SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check for the latest revision.

单击下面可查看定价,库存,交付和生命周期等信息

>>TE Connectivity(泰科)