
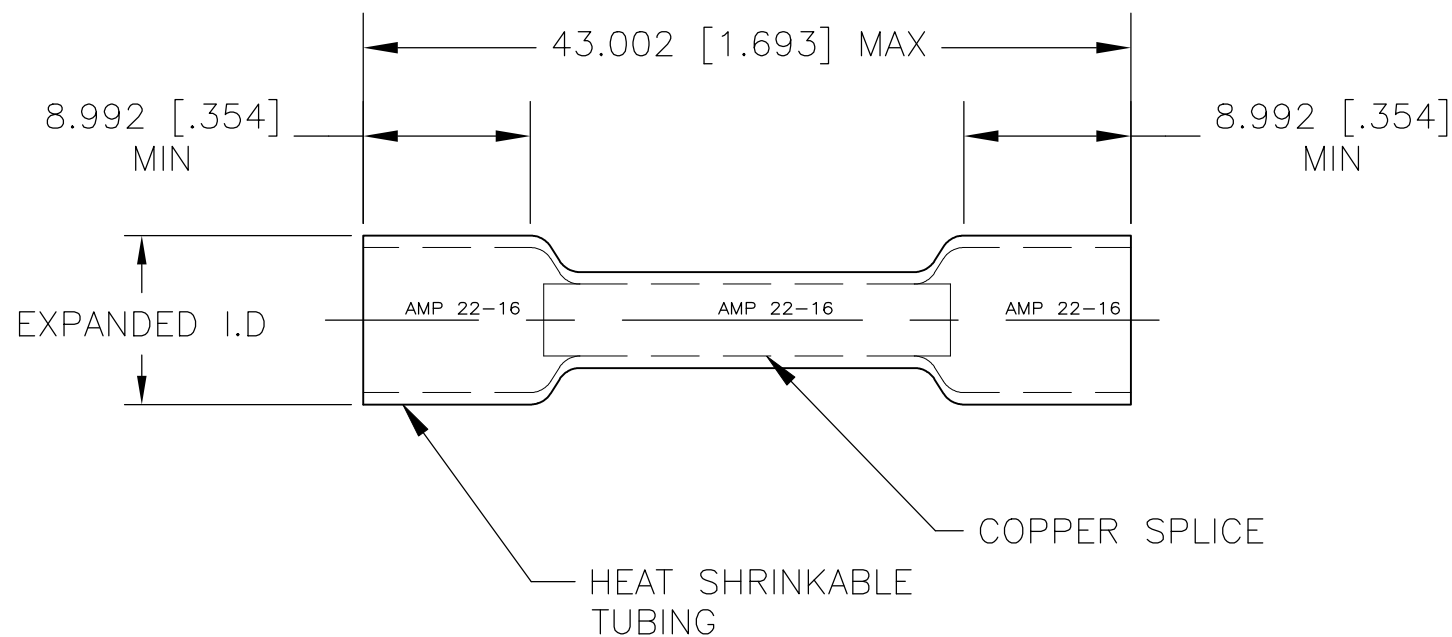


P	LTR	DESCRIPTION	DATE	DWN	APVD
	N	REV PER ECR 07-027142	12NOV07	JR	TM
	N1	REVISED PER ECO-17-016703	03APR2018	RS	DR
	N2	REVISED PER ECO-18-011826	26JUL2018	RS	DR



- 1 TUBING MATERIAL; CROSS-LINKED POLYMER WITH MELT LINER; COLOR, RED; BLACK INK LEGEND 1/16 MIN; HEIGHT; ONE FULL APPEARANCE MIN.
- 2 TEMP RATING -65°F TO 257°F [-55°C TO 125°C ]
- 3 NOTE DELETED
- 4 SHIPPING WEIGHT [0.076].003 LBS EACH
- 5 VOLTAGE RATING: 600 V MAX ( 1000 V MAX FIXTURES & SIGNS )
- △ 6 MATERIAL & FINISH ; BODY - COPPER, TIN PLATED SLEEVE - NYLON
- 7 NOTE DELETED

LOOSE PIECE	4.445 [.175]	1.651 [.065]	1000	603502-3
SMALL PACK	4.445 [.175]	1.651 [.065]	50/BOX	603502-2
PACKAGE TYPE	EXPANDED I.D. MIN	RECOVERED I.D. MAX	QTY	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 24JUN04	TE Connectivity Ltd.		
DIMENSIONS: mm [INCHES]		CHK T MICHIELUTTI 24JUN04			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T MICHIELUTTI 24JUN04	NAME PRE-INSULATED SEALED SPLICE WIRE SIZE: 22-16 AWG		
0 PLC ± - 1 PLC ± - 2 PLC ± 0.51 [.02] 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± -		PRODUCT SPEC -	-		
MATERIAL		APPLICATION SPEC -	SIZE A3	CAGE CODE 00779	DRAWING NO C-603502
FINISH		WEIGHT	RESTRICTED TO -		
△ 6		CUSTOMER DRAWING		SCALE 1:1	SHEET 1 OF 1
△ 6				REV N2	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)