
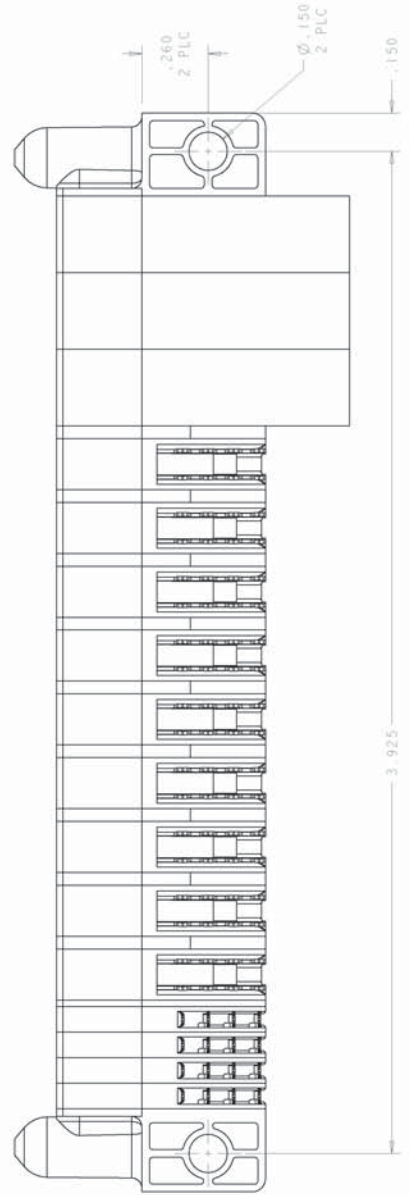
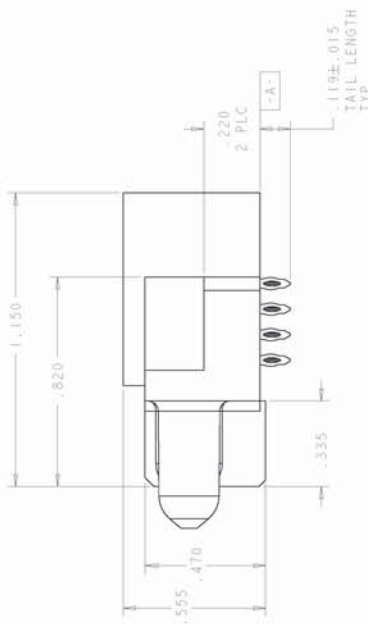
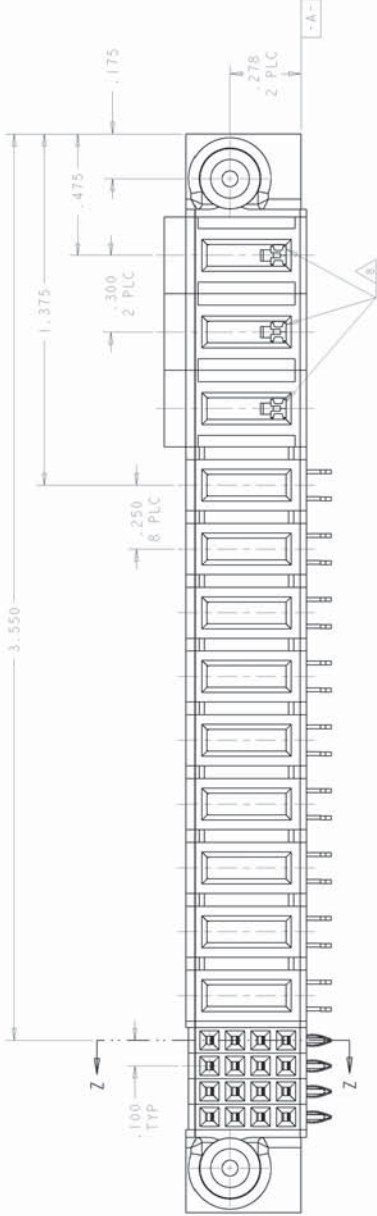


REV	DATE	BY	CHK	DESCRIPTION
1				REVISED DESIGN
2				REVISED
3				REVISED

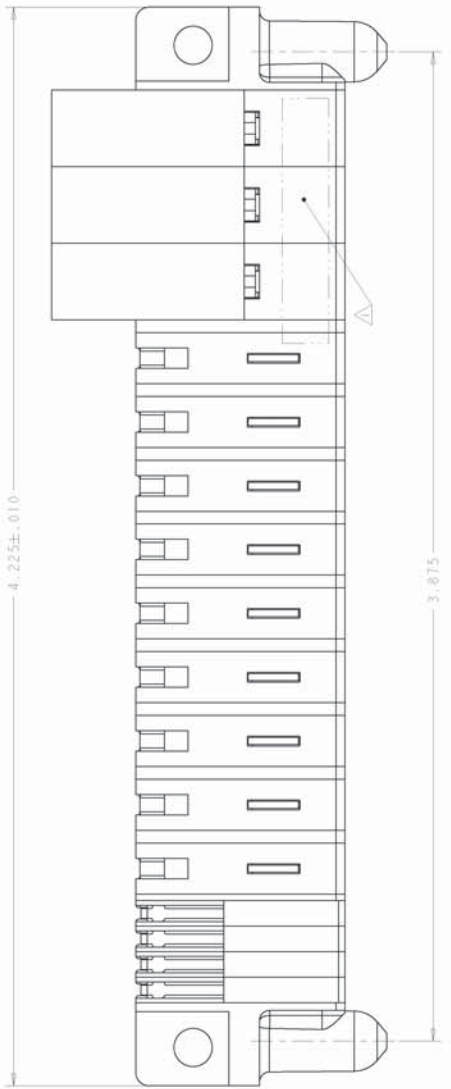

- △ "AMP", PART NUMBER AND DATE CODE TO BE MARKED
- △ MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0.  
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.  
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- △ CONTACT PLATING: SIGNAL CONTACTS - .000050 MIN Ni UNDER ALL.  
.000050 MIN Sn ON CONTACT AREA.  
POWER CONTACTS - .000050 MIN Ni UNDER ALL.  
.000050 MIN Sn ON CONTACT AREA.  
.000030 MIN Au ON CONTACT AREA.  
.000100 MIN Sn AT PCB INTERFACE.
- △ MECHANICAL CONNECTOR KEEP OUT ZONE.
- △ DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- △ PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- △ PCB - .045 ± .0010 DRILLED HOLES PLATED WITH .0003 MIN Sn OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 DIAMETER HOLE
- △ A/C POWER CABLE CONTACT LOADED IN THESE CAVITIES.

SECTION Z-Z

3ACP + 9P + 16S 1888132-1 PART NUMBER

REV	DATE	BY	CHK	DESCRIPTION
1				REVISED DESIGN
2				REVISED
3				REVISED



单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)