



LOC	DIST	REV	ZONE	LTR	DESCRIPTION	DATE	APPD
G	14				REVISED & REDRAWN PER 0720-0303-93	7-28-93	BB

REVISIONS

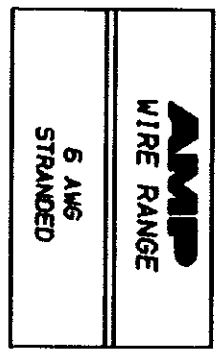

METRIOR
 DIMENSIONS LISTED IN MM [INCHES]

NOTE:
 1. WIRE INSULATION DIA 7.87 [.310] MAX

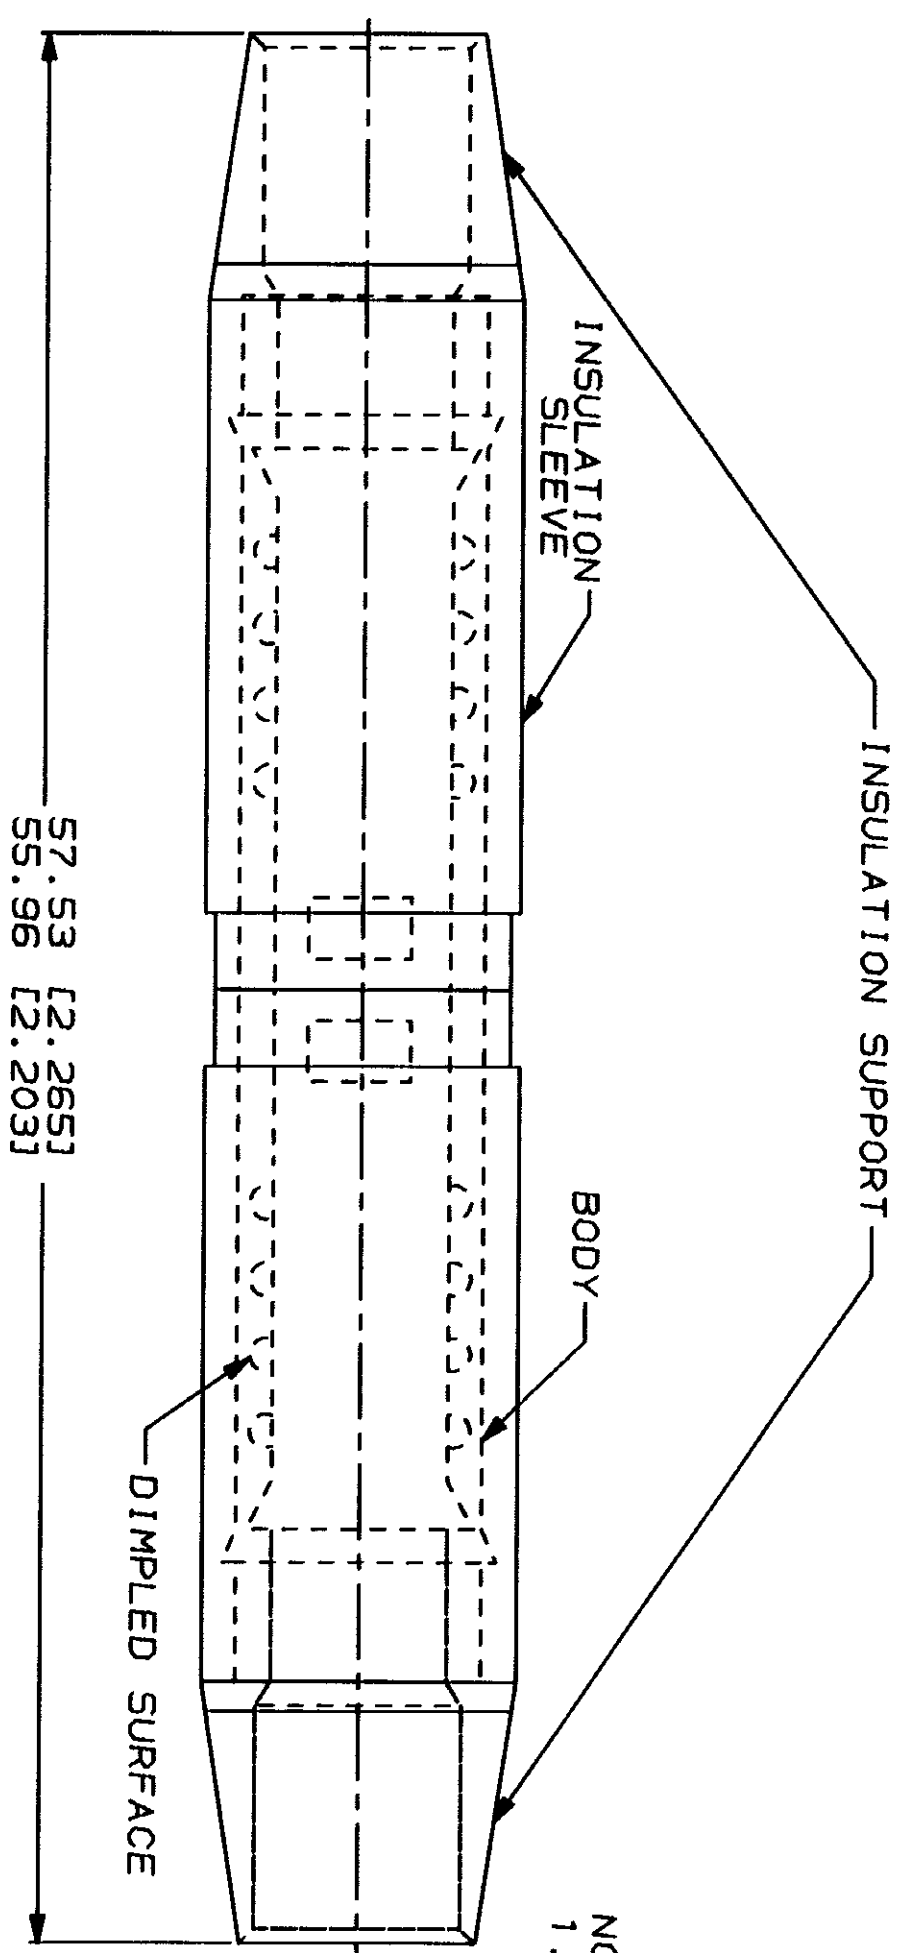

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C		DO NOT SCALE PRINT. DIMENSIONS SPECIFIED		DR S.S. GOULDEN		QTY 100		LOOSE PC		324660	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS		PRODUCT INFORMATION CENTER 1-800-522-6752		TOLERANCES UNLESS SPECIFIED: 2 PLG DEC ± 0.201.0002 3 PLG DEC ± .		CHK R. HEBERT		PACKAGE TYPE		AMP		AMP Incorporated Harrisburg, PA 17105-3608	
FOR APPLICATION		TOOLING ASSISTANCE CENTER 1-800-722-1111		MATERIAL COPPER PER ASTM B-152 ANNO, COLOR, BLUE		APPD R. BLAKE		PART NO		SPLICE, BUTT, SINGLE TO SINGLE, TERMINAL, WIRE SIZE: 6 AWG			
TOOLING INFORMATION		1-800-526-5142		FINISH TIN PLATE PER MIL-T-10727		APPD M. BLISS		SCALE NTS		CAGE CODE 00779		DRAWING NO G-324660	
FOR ORDER ENTRY		1-800-722-1111		APPLICATION SPEC		PRODUCT SPEC		SHEET 1 OF 1					

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)