THERMOFIT • SPECIFICATION CONTROL DRAWING • MOLDED PARTS

NOTES

1. All dimensions are in inches; all angles are in degrees.
2. Dimensions appearing in table below are as follows:
   a - As supplied b - After unrestricted recovery
3. Weight shown in table of dimensions is based on polyolefin part.
4. Molding ports are optional. When specified, they will be located as shown. Order 423A117-3-00 when molding ports are required.

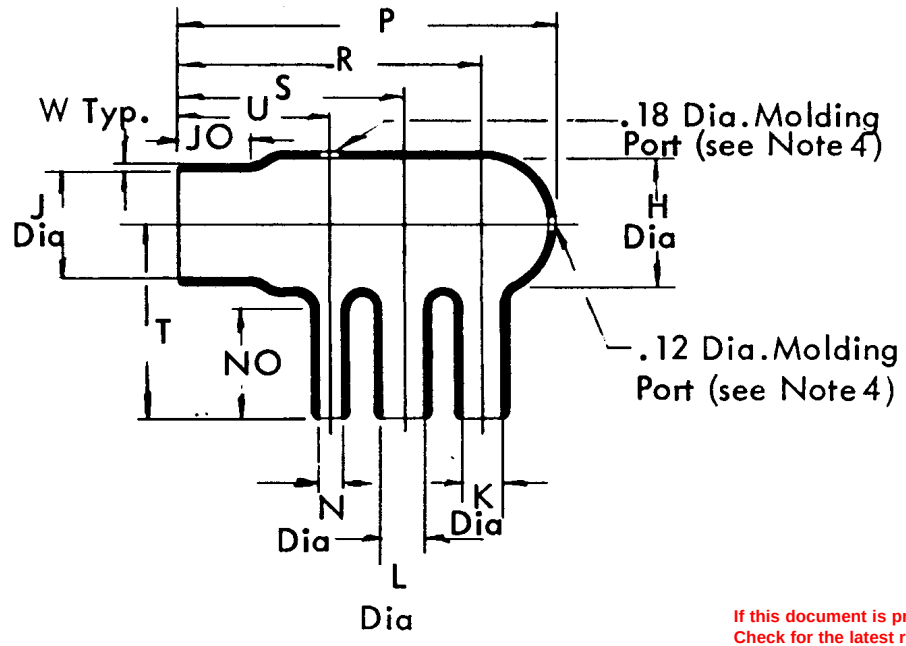

ORDERING INFORMATION

Matl No.	Description	Rayclad Matl. Spec.	Specific Grav. Max.
3	Polyolefin	RT-301	1.40
5	Neoprene	RT-501	1.50

Add material number as suffix to part number;
Example - Order 423A117-3 when polyolefin is required.

If this document is printed it becomes uncontrolled.
Check for the latest revision.

TABLE OF DIMENSIONS

PART NO.	H Min ±5% a	H Min ±5% b	J Min a	J Max b	K and L Min a	K and L Max b	N Min a	N Max b	P ±10% a	P ±10% b	R ±10% a	R ±10% b	S ±10% a	S ±10% b	T ±10% a	T ±10% b	U ±10% a	U ±10% b	NO ±10% a	NO ±10% b
423A117-3	1.30	1.19	1.30	1.09	.60	.41	.40	.23	—	3.65	—	2.79	—	2.05	—	1.80	—	1.38	—	1.00
423A117-5	1.30	1.19	1.30	1.19	.60	.45	.40	.25	—	3.65	—	2.79	—	2.05	—	1.80	—	1.38	—	1.00

PART NO.	JO ±10% a	JO ±10% b	W ±20% a	W ±20% b
423A117-3	—	.62	—	.07
423A117-5	—	.62	—	.07

RAYCLAD TUBES INCORPORATED
A SUBSIDIARY OF
RAYCHEM CORPORATION

E O	REV	DATE	DESCRIPTION

DRN	DLD
CHK D	KT
AUTH	RW
AUTH	HP

PART DESCRIPTION: BOOT, 4 ENTRY

PART NO: 423A117

REV LTR:

DATE: June 15, 1967

单击下面可查看定价，库存，交付和生命周期等信息

>>TE Connectivity(泰科)

Downloaded From Oneyac.com