

SPECIFICATION CONTROL DRAWING

55PC7012

TITLE

FOUR CONDUCTOR CABLE, SHIELDED, JACKETED, NOMEX BRAID, 600 VOLT


Date 10-26-93

Revision

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

W & C DESIGN
 RED STAMP - CONTROL COPY
 BLACK STAMP - CHECK FOR
 LATEST ISSUE

COMPONENT CABLE - 55PC1841-AWG

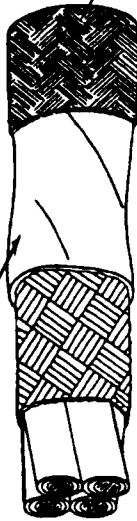

BRAID - NOMEX BRAID TREATED TO
 PREVENT FRAYING
 COLOR - ORANGE

CONSTRUCTION DETAILS			
PART NUMBER	CONDUCTOR SIZE (AWG)	DIAMETER (in.) TARGET VALUE	WEIGHT (lbs/1000 ft.) TARGET VALUE
55PC7012-24*	24	.160	18.87
55PC7012-22*	22	.175	23.82
55PC7012-20*	20	.198	31.80
55PC7012-18*	18	.224	43.53
55PC7012-16*	16	.245	52.85
55PC7012-14*	14	.288	76.22
55PC7012-12*	12	.342	112.49

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

PART NUMBER:

The "n" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire color from the jacket color and the jacket color from the braid color.

Example: AWG 20, red, blue, yellow and green components, white jacket, orange braid: 55PC7012-20-2/6/4/5-9-3

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

Page 1 of 1

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE IN EFFECT ON DATE OF INVITATION FOR BID.

Raychem

Raychem Corporation
 300 Constitution Drive, Menlo Park, California 94025
 1-800-2-Raychem Fax: 1-415-361-6297

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)