



RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT (CONNECTOR SIDE) FOR -1 THRU -2--3, 2--5, AND 2--6

RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT (CONNECTOR SIDE) FOR 2-530340-4 ONLY

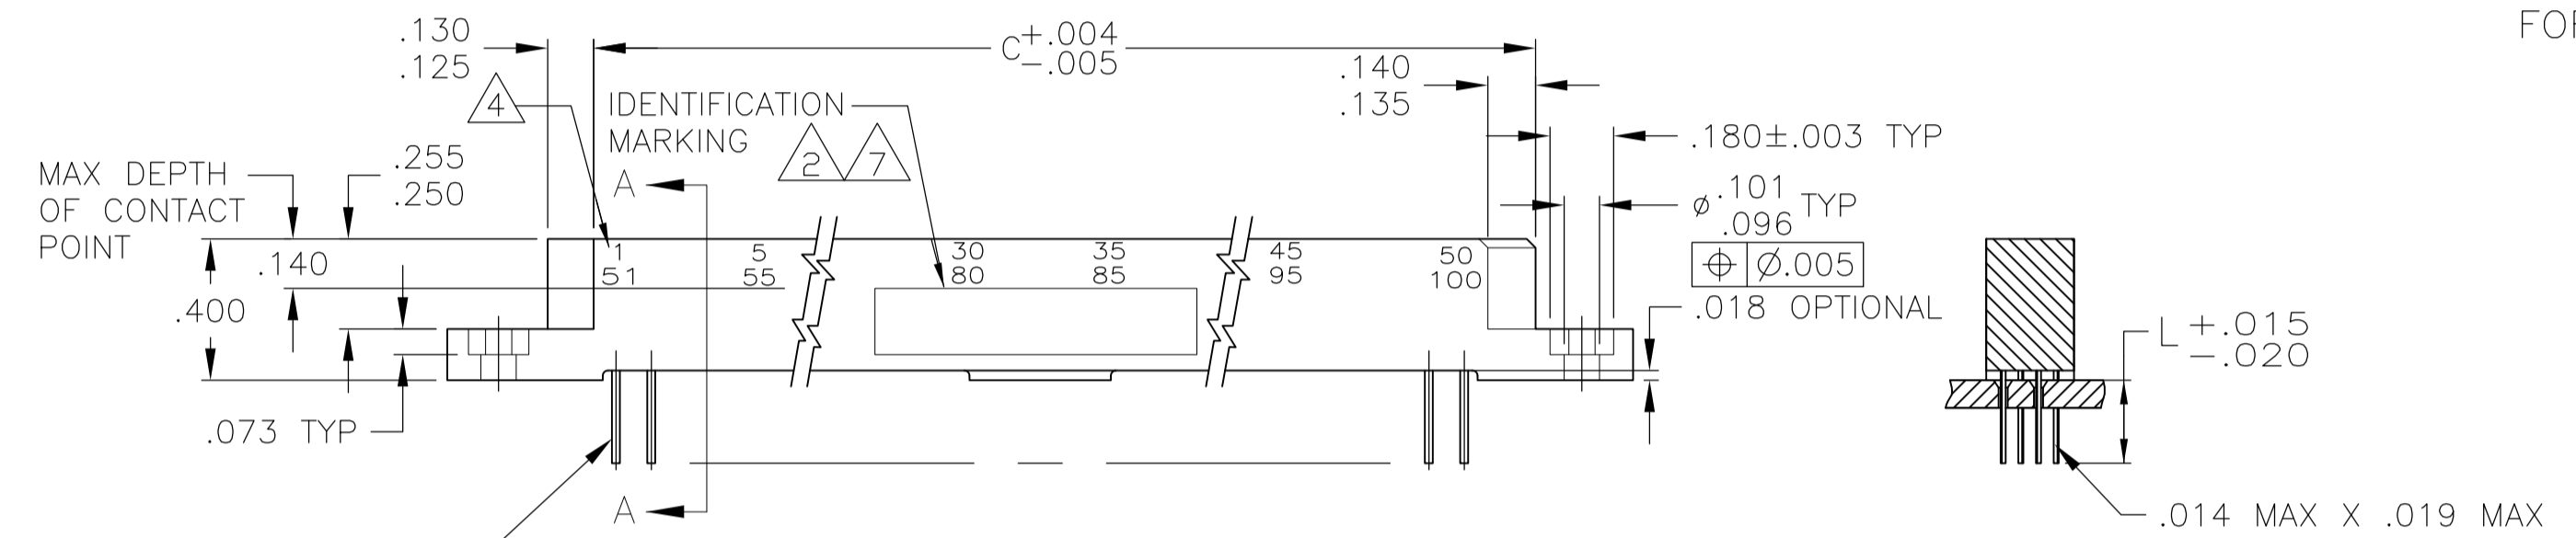

SECTION A-A FLOW SOLDER TYPE

CONTACT MATERIAL: BERYLLIUM COPPER (BeCu) OR COPPER NICKEL SILICON (CuNiSi)



REMARKS	L	IDENTIFICATION MARKING	CONTACT IDENT NO.	DIMENSIONS					NO OF POSN	ASSEMBLY NUMBER
				E	D	C	B	A		
OBSOLETE		8		2.900	29	3.165	3.565	3.855	60	2-530340-7
		8		5.400	54	5.665	6.065	6.355	110	2-530340-6
		8		1.900	19	2.165	2.565	2.855	40	2-530340-5
OBSOLETE		8		5.400	54	5.665	6.065	6.355	110	2-530340-4
		8	7	5.400	54	5.665	6.065	6.355	110	2-530340-3
		8	M55302/27-193	6.900	69	7.165	7.565	7.855	140	2-530340-2
		8	M55302/27-192	6.600	66	6.865	7.265	7.555	134	2-530340-1
		8	M55302/27-191	6.400	64	6.665	7.065	7.355	130	2-530340-0
		8	M55302/27-190	5.900	59	6.165	6.565	6.855	120	1-530340-9
		8		5.400	54	5.665	6.065	6.355	110	1-530340-8
OBSOLETE		8		4.900	49	5.165	5.565	5.855	100	1-530340-7
OBSOLETE		8		4.400	44	4.665	5.065	5.355	90	1-530340-6
		8		3.900	39	4.165	4.565	4.855	80	1-530340-5
OBSOLETE		8		3.400	34	3.665	4.065	4.355	70	1-530340-4
		8		2.900	29	3.165	3.565	3.855	60	1-530340-3
OBSOLETE		8		2.400	24	2.665	3.065	3.355	50	1-530340-2
		8		1.900	19	2.165	2.565	2.855	40	1-530340-1
		8		1.400	14	1.665	2.065	2.355	30	1-530340-0
		8	M55302/27-99	5.400	54	5.665	6.065	6.355	110	530340-9
		8	M55302/27-98	4.900	49	5.165	5.565	5.855	100	530340-8
		8	M55302/27-97	4.400	44	4.665	5.065	5.355	90	530340-7
		8	M55302/27-96	3.900	39	4.165	4.565	4.855	80	530340-6
		8	M55302/27-95	3.400	34	3.665	4.065	4.355	70	530340-5
		8	M55302/27-94	2.900	29	3.165	3.565	3.855	60	530340-4
		8	M55302/27-93	2.400	24	2.665	3.065	3.355	50	530340-3
		8	M55302/27-92	1.900	19	2.165	2.565	2.855	40	530340-2
		8	M55302/27-91	1.400	14	1.665	2.065	2.355	30	530340-1

- 1 NUMBERS (SEE TABLE) AND LINES INDICATING EVERY FIVE CAVITIES MARKED ON MATING FACE.
- 2 IDENTIFICATION MARKING PER MIL-C-55302 (SEE TABLE)
- 3. MUST MEET ALL APPLICABLE REQUIREMENTS OF MIL-C-55302
- 4 NUMBERS INDICATING EVERY FIVE CAVITIES MARKED ON SIDE
- 5 KEY POSITION IDENTIFICATIONS MOLDED ON SURFACES SHOWN
- 6. USE EXTERNAL KEY NO 530341-1, MATES WITH P/N 530339
- 7 ADDITIONAL STAMPING PC 78620-1
- 8 CONTACT FINISH: .000050 GOLD IN CONTACT AREA, .000100 TIN-LEAD ON SOLDER TAILS, ALL OVER .000030-.000150 NICKEL.

THIS DRAWING IS A CONTROLLED DOCUMENT. **STE** TE Connectivity

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN C.C.THOMAS 2-26-91	APVD G.GRIFFITH 11-14-91
0 PLC ± .005	1 PLC ± .002	11-14-91	NAME
2 PLC ± .001	3 PLC ± .001		RCPT ASSY, 1000 SERIES BOX, EXTERNAL KEYING WITH GASKET
4 PLC ± .001	ANGLES ± .001		APPLICATION SPEC
MATERIAL DIALYL PHTHALATE	FINISH	SIZE A1	CAGE CODE 00779
		DRAWING NO	530340
		WEIGHT	RESTRICTED TO
		CUSTOMER DRAWING	SCALE 2:1 SHEET 1 OF 1 REV K1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)