


TOLERANCE ± .010

COIL: @ 25° C	
RESISTANCE	540-770 OHMS
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	10.1 VDC MAX, 2.3 VDC MIN.

**CUSTOMER DATA SHEET**

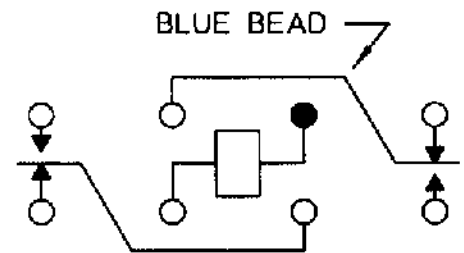

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

CONTACT RATING: 2 AMPS 28 VDC  
RESISTIVE 100,000 OPERATIONS

NOTES: OPERATE & RELEASE TIME 6 MS MAX.  
\* CONTACT BOUNCE 1 MS MAX.  
\* (MEASURED AT 100mA 28 VDC)

DR. R.B. 11/15/95 CK. 11/15/95 MB



CUST. QPL  
CUST. NO M5757/10-039

TYPE "FW" RELAY

FW1120G01

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)